



Branching Out

ShawContract®

Authentic Tones

Branching Out (LVT 4256V) offers a palette of core colors and visuals that are available in a 5 mm construction. *Branching Out's* timeless wood visuals are available in a fresh palette of neutrals ranging from light and airy to warm and rich. They bring a feeling of comfort and authenticity to any space.

COVER:

BRANCHING OUT (LVT 4256V) IN ZION OAK (56103) | INSTALLED STAGGER
AND **DRIP (RUG G204R)** IN VIBRANT (72585)

Visit [shawcontract.com](https://www.shawcontract.com) to download this palette and to view additional palette ideas.




BRANCHING OUT (LVT 4256V) IN ZION OAK (56103) | INSTALLED STAGGER AND DRIP (RUG G204R) IN VIBRANT (72585)



A Sound Choice

Branching Out brings the Soundscape acoustic backing to absorb and stop sound from traveling, a human-centered solution for private and public spaces. There is no need for transition strips as the 5 mm thickness complements a wide variety of carpet tiles.

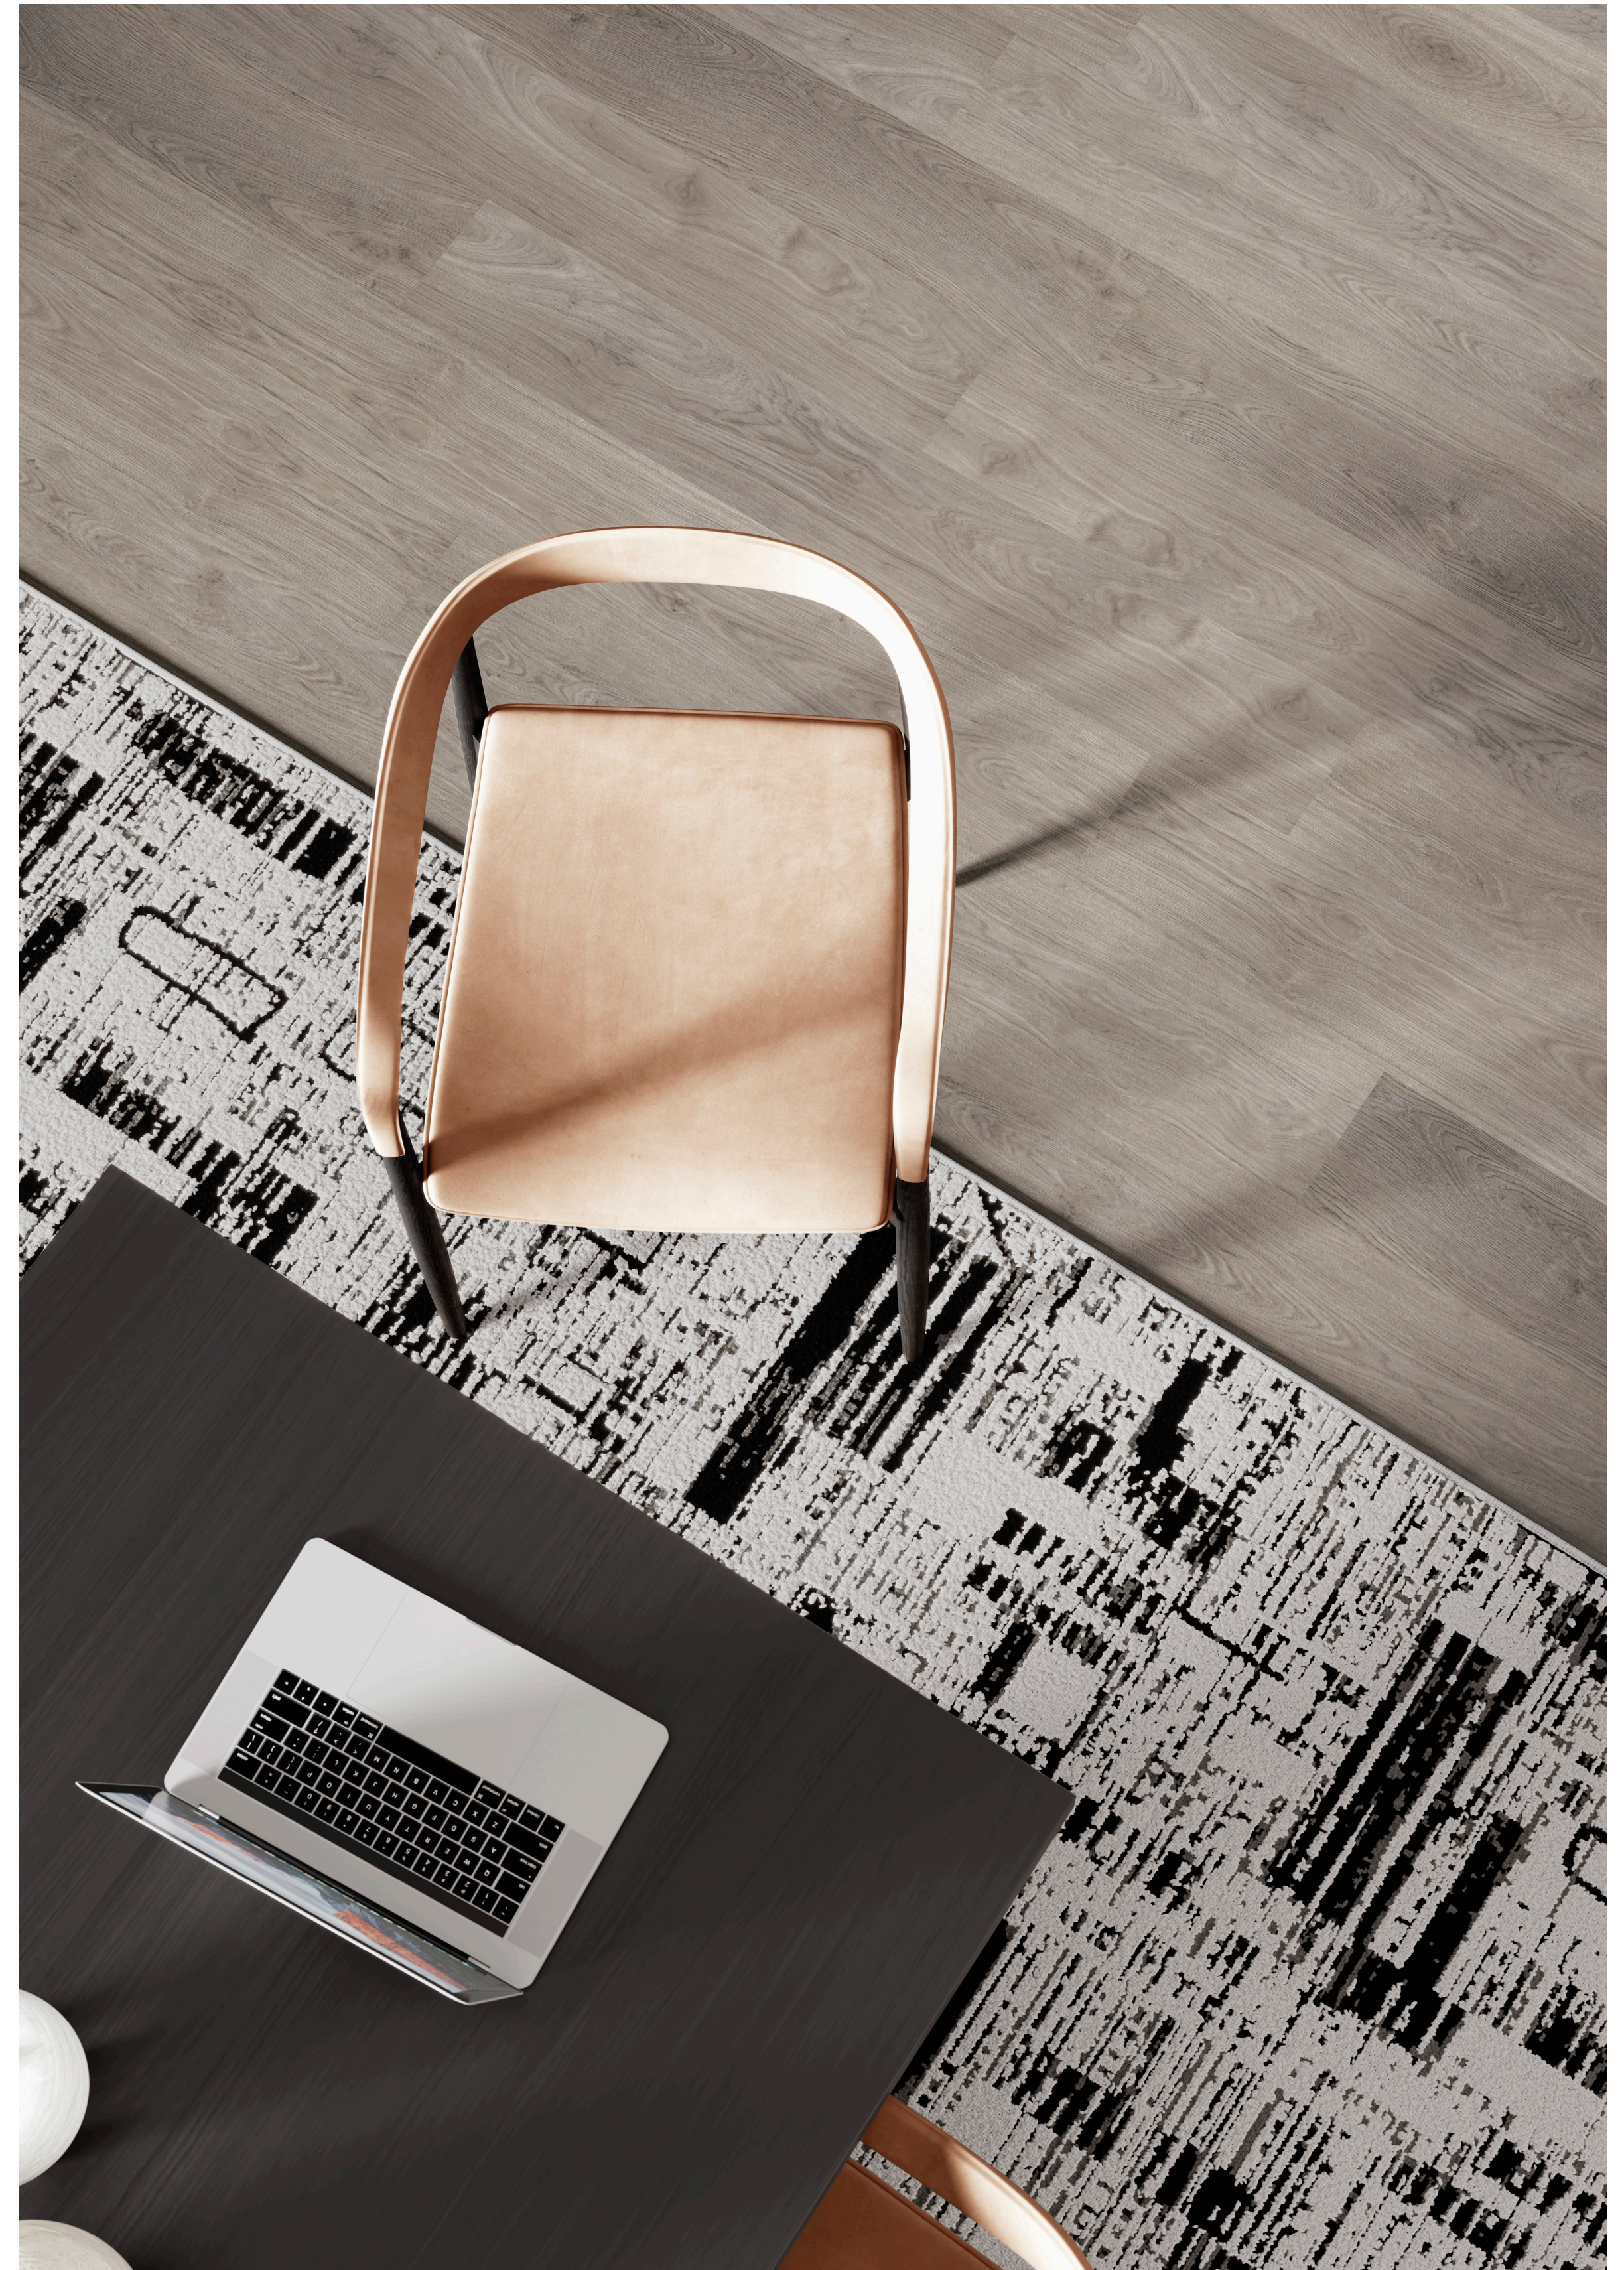

BRANCHING OUT (LVT 4256V) IN SMOKY OAK (56516) | INSTALLED STAGGER
AND EMBRACE (RUG G001R) IN TRADITION (01105)

BRANCHING OUT (LVT 4256V) IN SMOKY OAK (56516) | INSTALLED STAGGER AND EMBRACE (RUG G001R) IN TRADITION (01105) AND SHARE (RUG G004R) IN EMPATHY (01100)



Colorways

The colorways are modern takes on warm / cool combinations, whitewashed woods and overall lightened tones. Branching Out builds on existing platforms by modernizing overall aesthetics and creating authentic wood visuals with low-gloss finishes.

BRANCHING OUT (LVT 4256V) IN TRAVERSE OAK (56760) | INSTALLED STAGGER AND RIBBONS (RUG G198R) IN SHINE (66155)




Color and Visual Variation Index

BRANCHING OUT (LVT 4256V) | 5 MM | 20 MIL | 6 IN × 48 IN | 13 COLORS | EXOGUARD™ FINISH



V3 Prairie Oak 56240

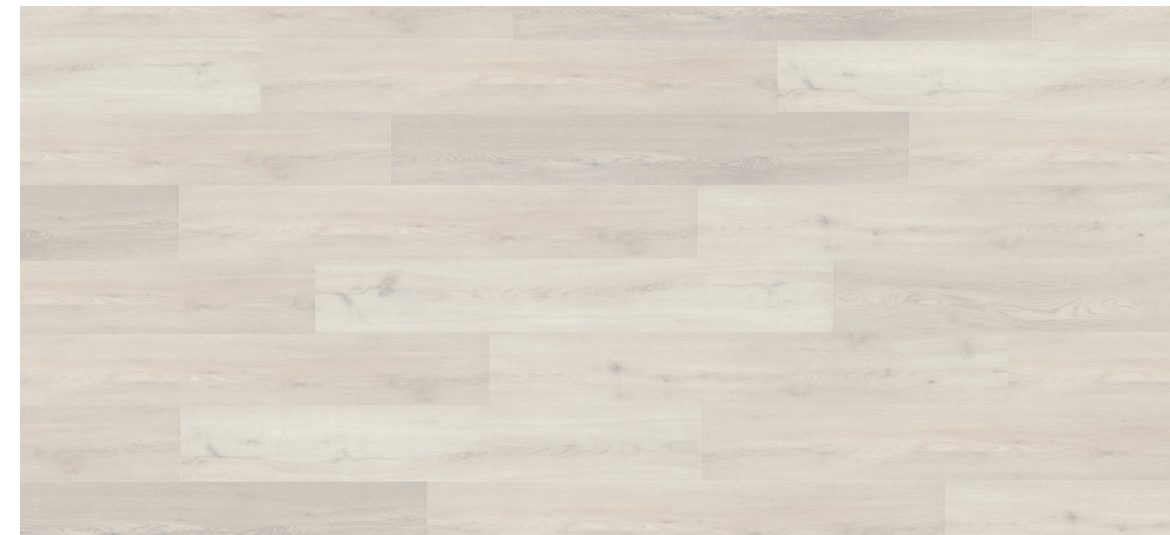

V3 Rise Oak 56120



V3 Alpine Oak 56100




V3 Smoky Oak 56516




V2 Zion Oak 56103



V2 Riverside Oak 56140

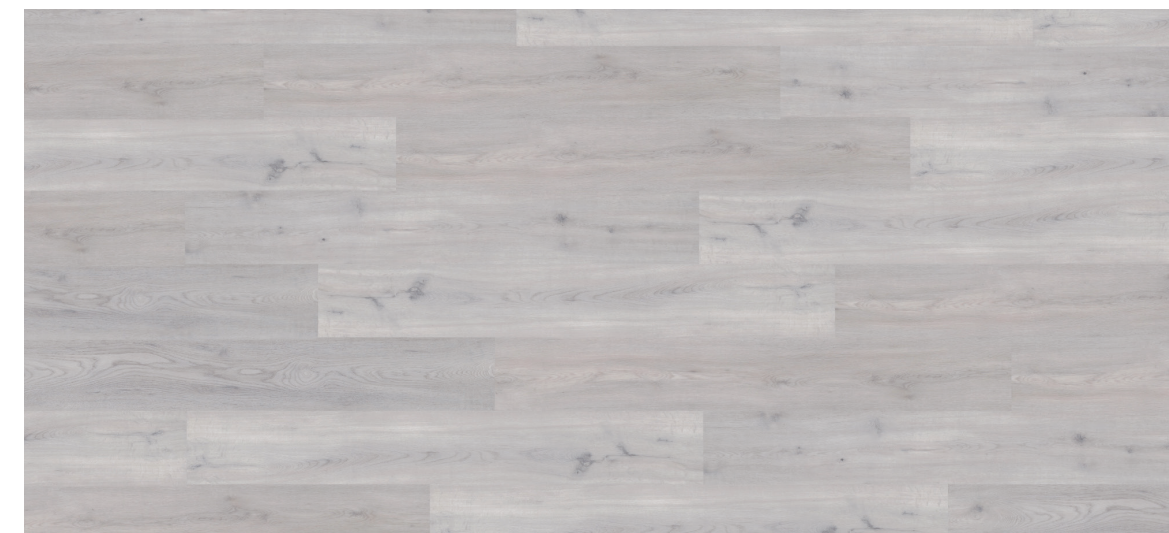

V3 Ridgeline Oak 56504

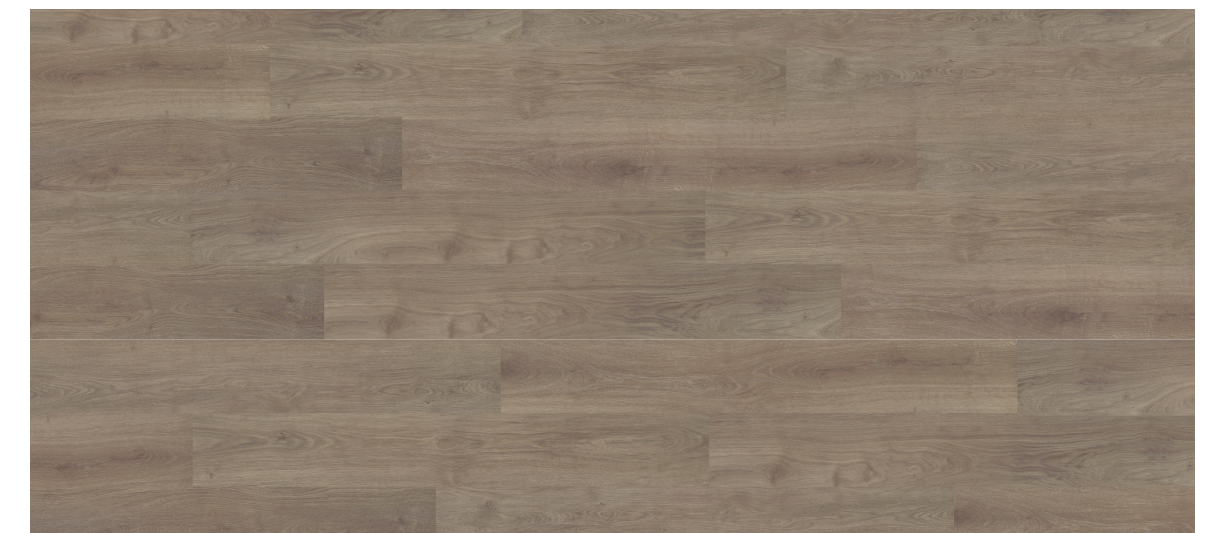

V3 Pinecone Oak 56720




V2 Ravine Oak 56730




V3 Plains Oak 56250



V2 Range Oak 56506

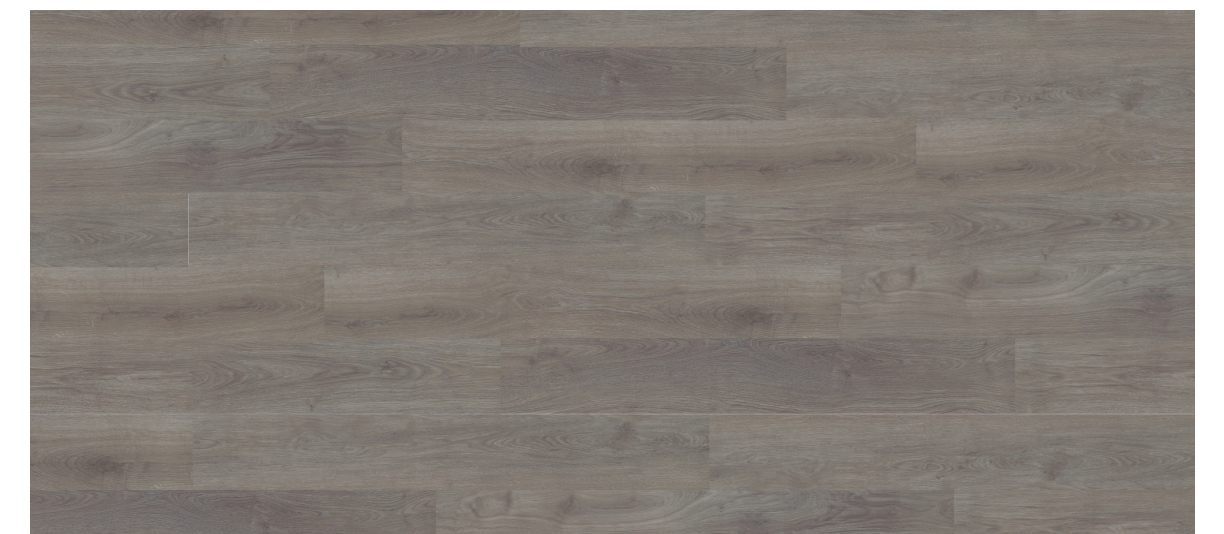


V3 Traverse Oak 56760

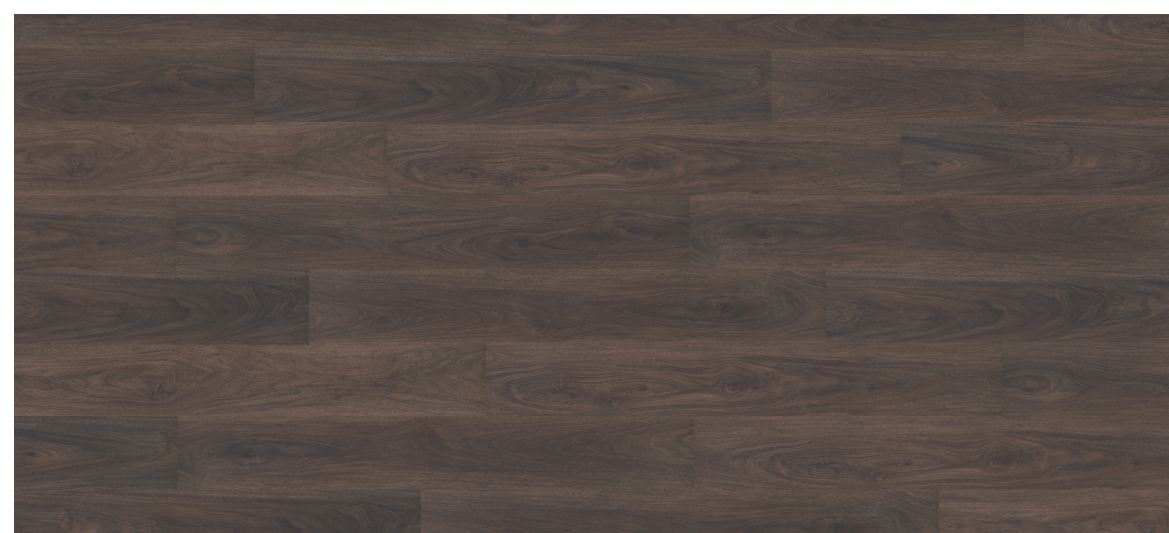

V2 Forest Walnut 56703


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 shade variation has little or no variation from piece to piece. V4 will have a large variation in color and / or texture. Samples should be used to assess color.

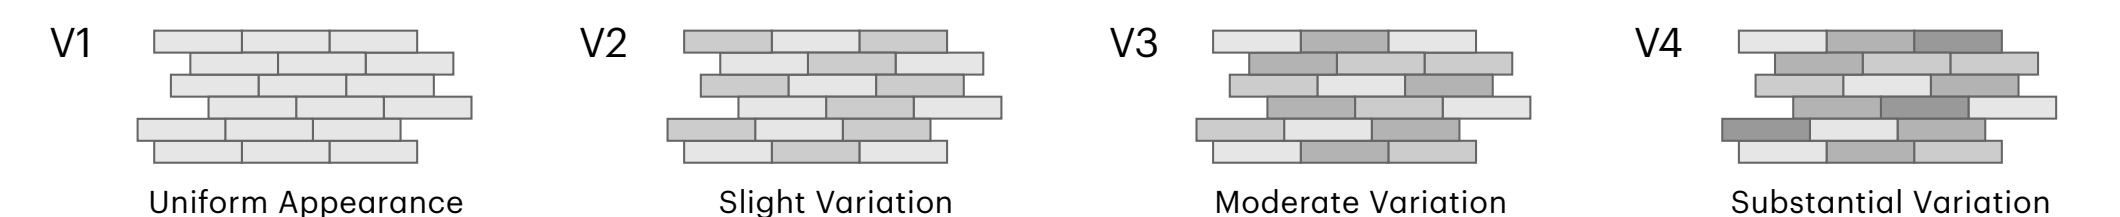

BRANCHING OUT (LVT 4256V) IN RISE OAK (56120) | INSTALLED STAGGER



LVT Construction

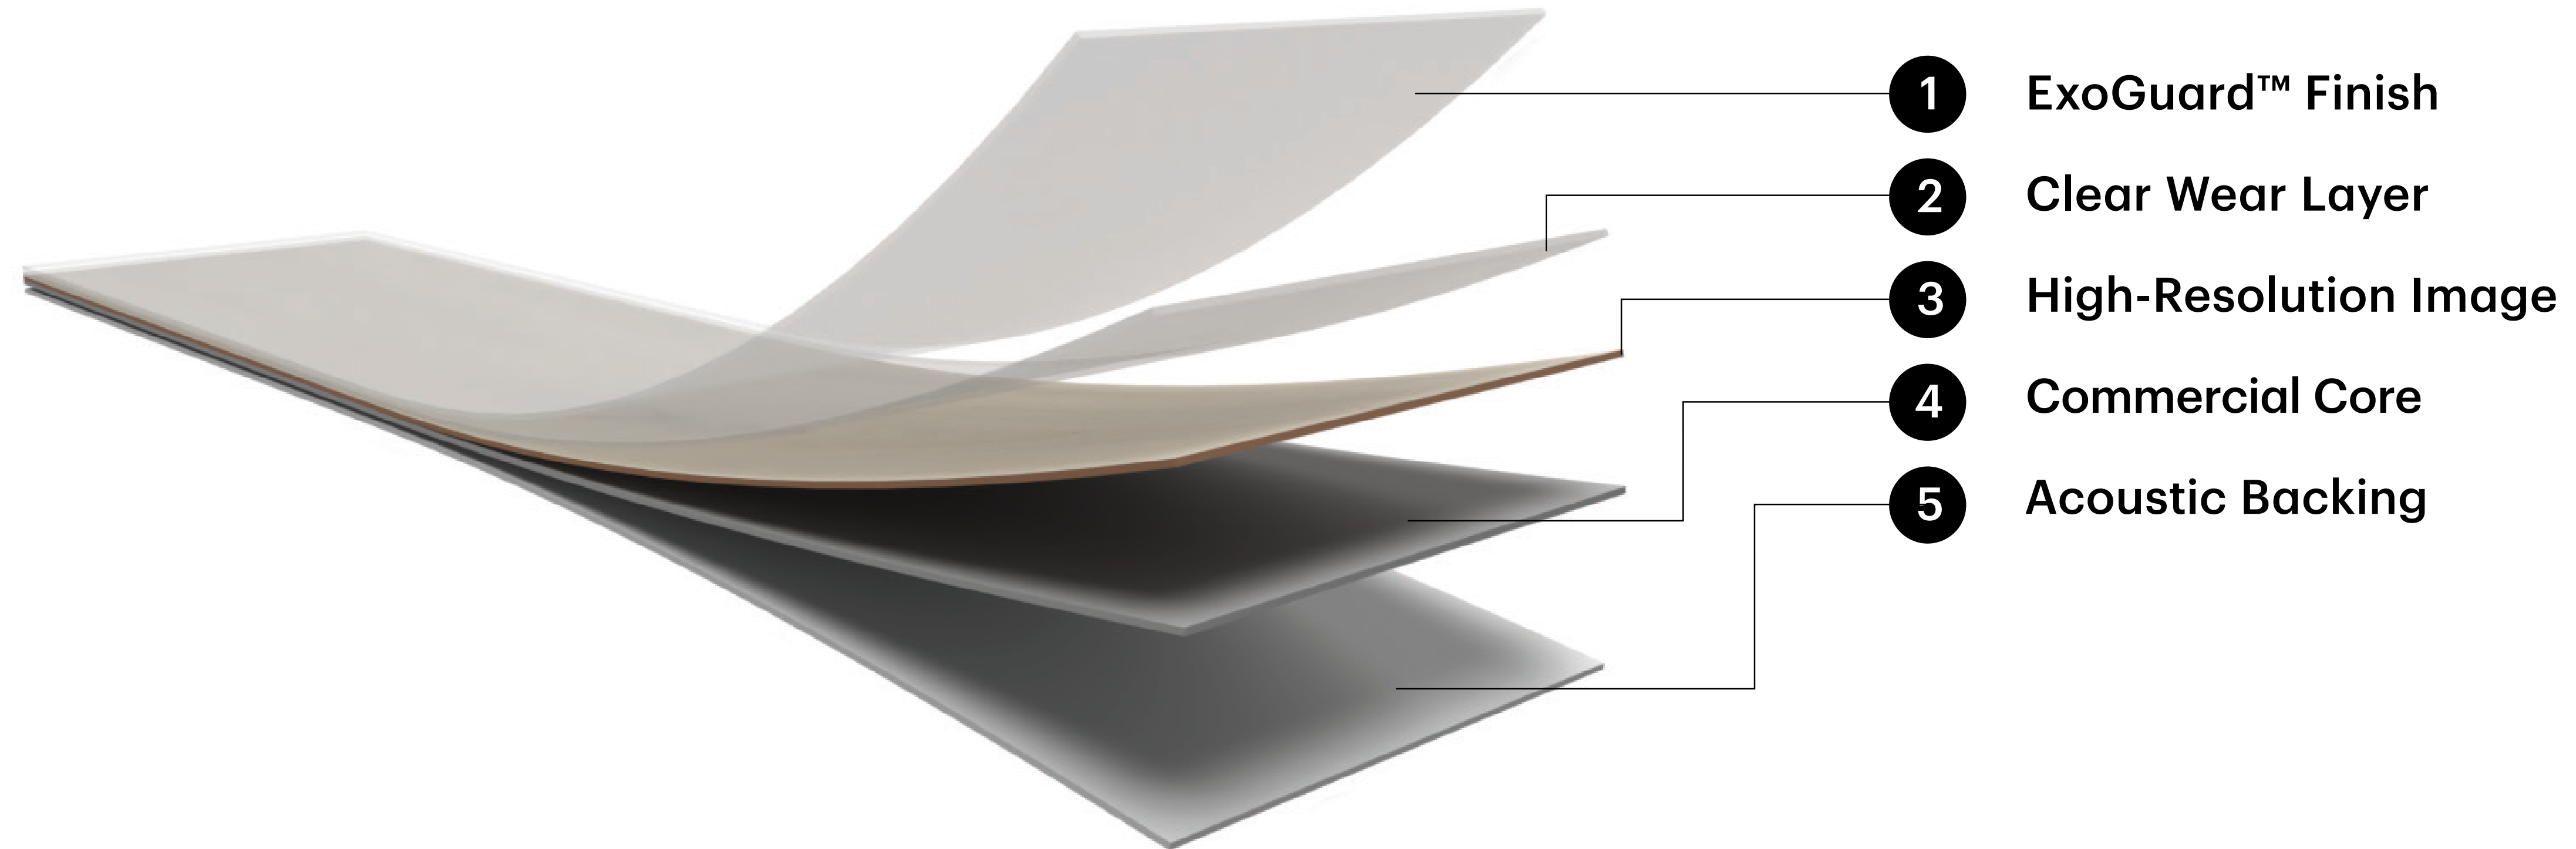

LVT 4256V 20 mil 5 mm with Acoustic Backing


GLUE DOWN INSTALLATION

Ideal for Light Commercial Environments

Hospitality | Multi-family | Workplace



Why *Branching Out* LVT?




Built to Perform

Proper embossing, lower gloss levels and an ExoGuard™ topical finish protects against daily stains and abrasion.



No Transition Needed

5 mm LVT can be installed next to most carpet tiles without the need for transition strips.



Ease of Installation

Glue down LVT is designed for ease of installation and maintenance.




LEEDv4 Contributions

IEQ – Floorscore IAQ Certification
MR – RFCI Industry Average EPD



Polish-Optional Reduces Cost

ExoGuard™ is a polish-optional finish that can reduce the cost of annual maintenance.




Reduces Sound Transmission

An attached acoustic underlayment provides added sound dampening from floor-to-floor sound transfer.

Contribution to the Built Environment

Branching Out LVT provide an acoustical benefit, mitigating sound transfer between floors. Carefully chosen interior materials help you design an acoustic experience that encourages positive emotional and physical responses in the built environment. By selecting *Branching Out* and pairing it with other acoustics solutions like area rugs or carpet tile, acoustics improve and sound absorption rises.

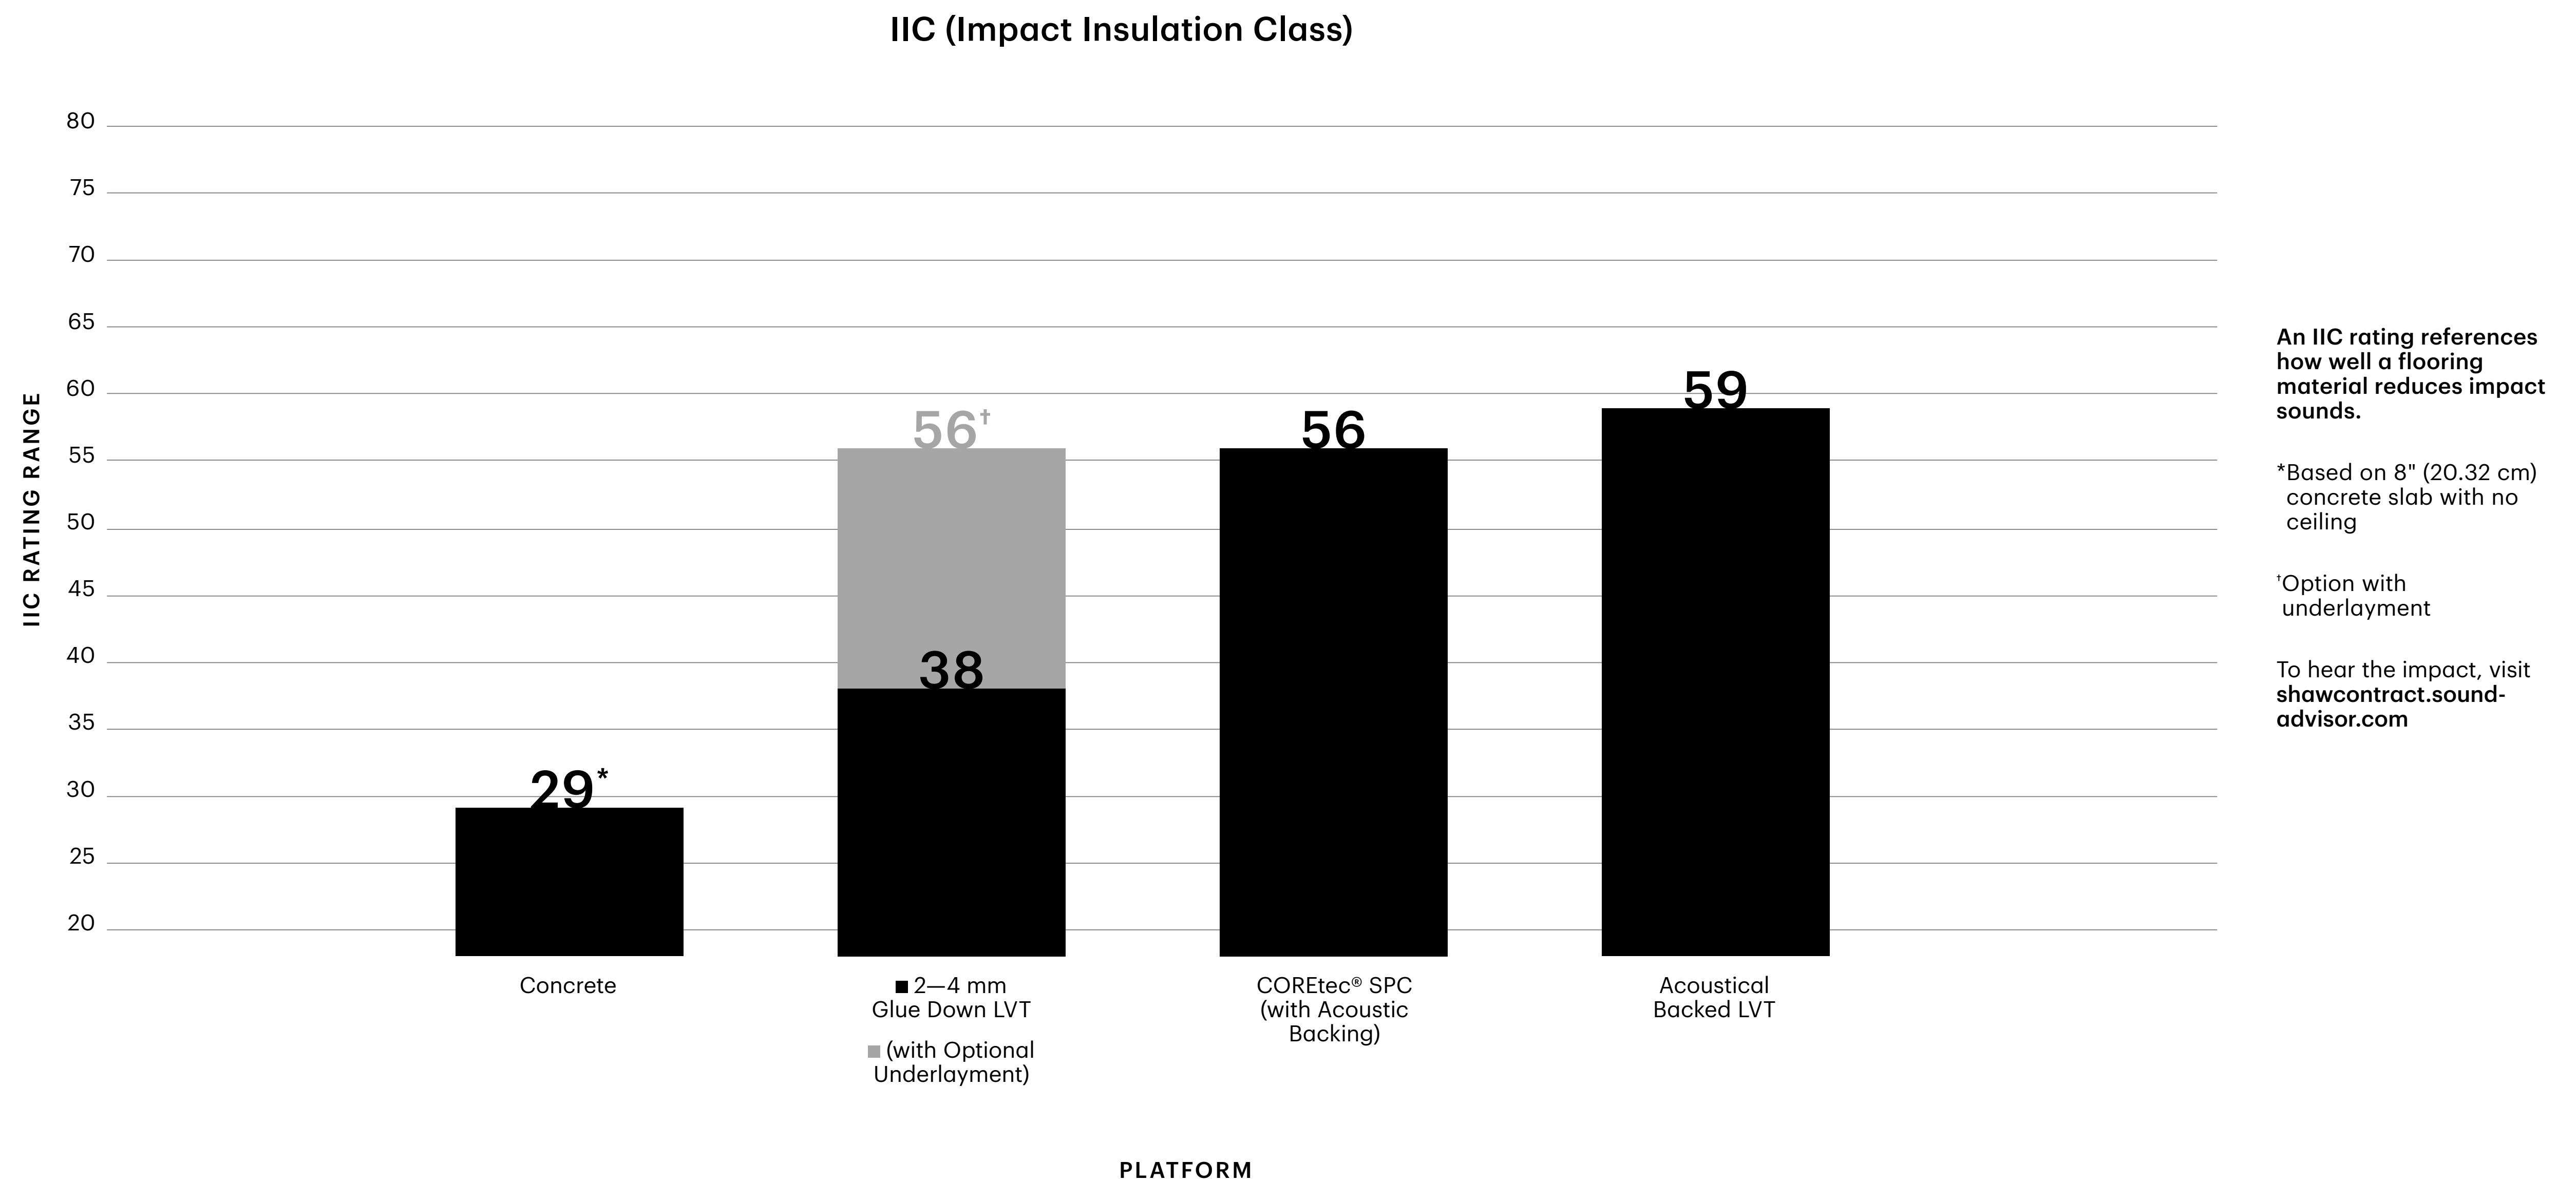

BRANCHING OUT (LVT 4256V) IN FOREST WALNUT (56703) | INSTALLED STAGGER



Branching Out

Specifications


Style Name	Branching Out LVT 5 mm
Style Number	4256V
Construction	Heavy Commercial Luxury Vinyl Tile with Acoustic Backing
Finish	ExoGuard™
Class	Class III, Type B
Installation	Direct Glue
Recommended Adhesive	Shaw 4100 or 4151

	US Units	Metric Units
Nominal Dimensions	6 in × 48 in	15 cm × 122 cm
Wear Layer Thickness	0.02 in	20 mil (0.51 mm)
Overall Thickness	0.197 in	5.0 mm
Actual Width	6.0 in	15.24 cm
Actual Length	48.0 in	121.92 cm

Static Load	
Residual Indentation	
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Resistance to Chemicals	(ASTM F925) Passes
Radiant Panel	(ASTM 648) Class 1
NBS Smoke	(ASTM E662) < 450
Warranty*	15 Year Commercial Limited


*For detailed warranty information visit shawcontract.com.

Recommended Installation Methods

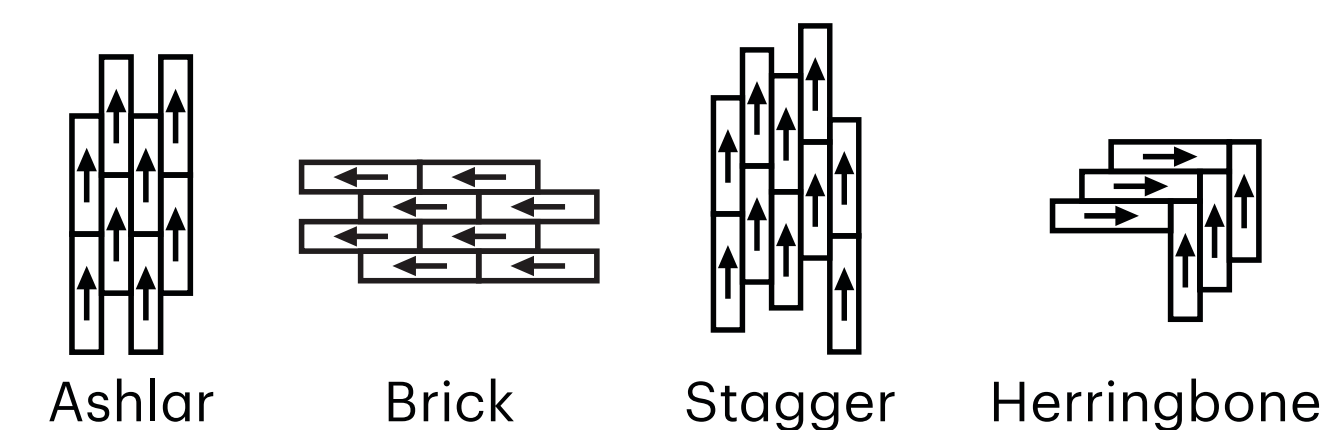

Color and Visual Variation Index

Color and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colors.

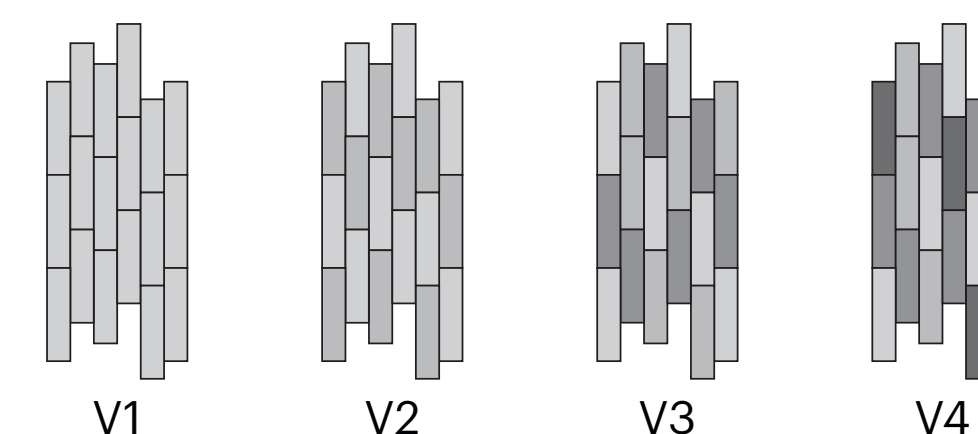

- V1** Uniform Appearance
- V2** Slight Variation
- V3** Moderate Variation
- V4** Substantial Variation



ShawContract®