

Shaw Contract Resilient Platforms

January 2023



ShawContract®

Table of Contents

- Meet the Platforms** 01
 - Glue Down LVT
with *ExoGuard™* 02
 - Glue Down LVT
with *ExoGuard+™* 04
 - Glue Down LVT
with *Acoustic Backing* 06
 - Floating LVT
with *In*Step™ Locking* 08
 - Woven LVT 10
 - Loose Lay LVT
with *ExoGuard™* 12
 - Loose Lay LVT
with *ExoGuard+™* 14
 - COREtec®
(WPC—Wood Polymer Composite) 16
 - COREtec®
(SPC—Solid Polymer Composite) 18
 - Rigid Core
with *InLine Level Edge™ Profile* 20
 - Rigid Mineral Core
with *InLine Level Edge™ Profile* 22
 - PVC-Free Resilient 24
 - Homogeneous Sheet 26
 - Heterogeneous Sheet 28
 - Sports Floor 30
- Terms + Information to Know** 32
- Values + Products Chart** 34

Glue Down LVT with ExoGuard™

Features + Benefits:

- Easy installation and maintenance.
- Competitive price point.
- Commercial Limited Warranty, covering manufacture defects and wear.
- 10 Year Underbed Warranty, bond warranty when used with the appropriate products.
- Available in 2 mm, 2.5 mm, 3 mm, 4 mm and 5 mm thick options.
- The 5 mm thick options can be installed next to most carpet tiles without the need for transition strips.
- The 5 mm thick options improve sound transmission and sound impact.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification..
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

LIGHT COMMERCIAL

Reside
8 mil | 2 mm
4099V

Brush
12 mil | 2.5 mm
0565V

Terrain
8 mil | 2 mm
0655V

Native Origins
12 mil | 2.5 mm
0116V

Reside
12 mil | 2 mm
4094V

HEAVY COMMERCIAL

Crete
20 mil | 3 mm
0203V

Shear
20 mil | 5 mm
0945V

Cut
20 mil | 5 mm
0922V

Solitude
20 mil | 5 mm
0648V

Emerge
20 mil | 2.5 mm
0618V

Strand
20 mil | 2.5 mm
0516V

Grain
20 mil | 2.5 mm
0502V

Surface
20 mil | 2.5 mm
0515V


Intricate
20 mil | 2.5 mm
0692V

**Uncommon
Ground 4"**
20 mil | 3 mm
0187V

Jeogori
20 mil | 3 mm
0215V

**Uncommon
Ground 6"**
20 mil | 3 mm
0188V

Pigment
20 mil | 2.5 mm
0503V

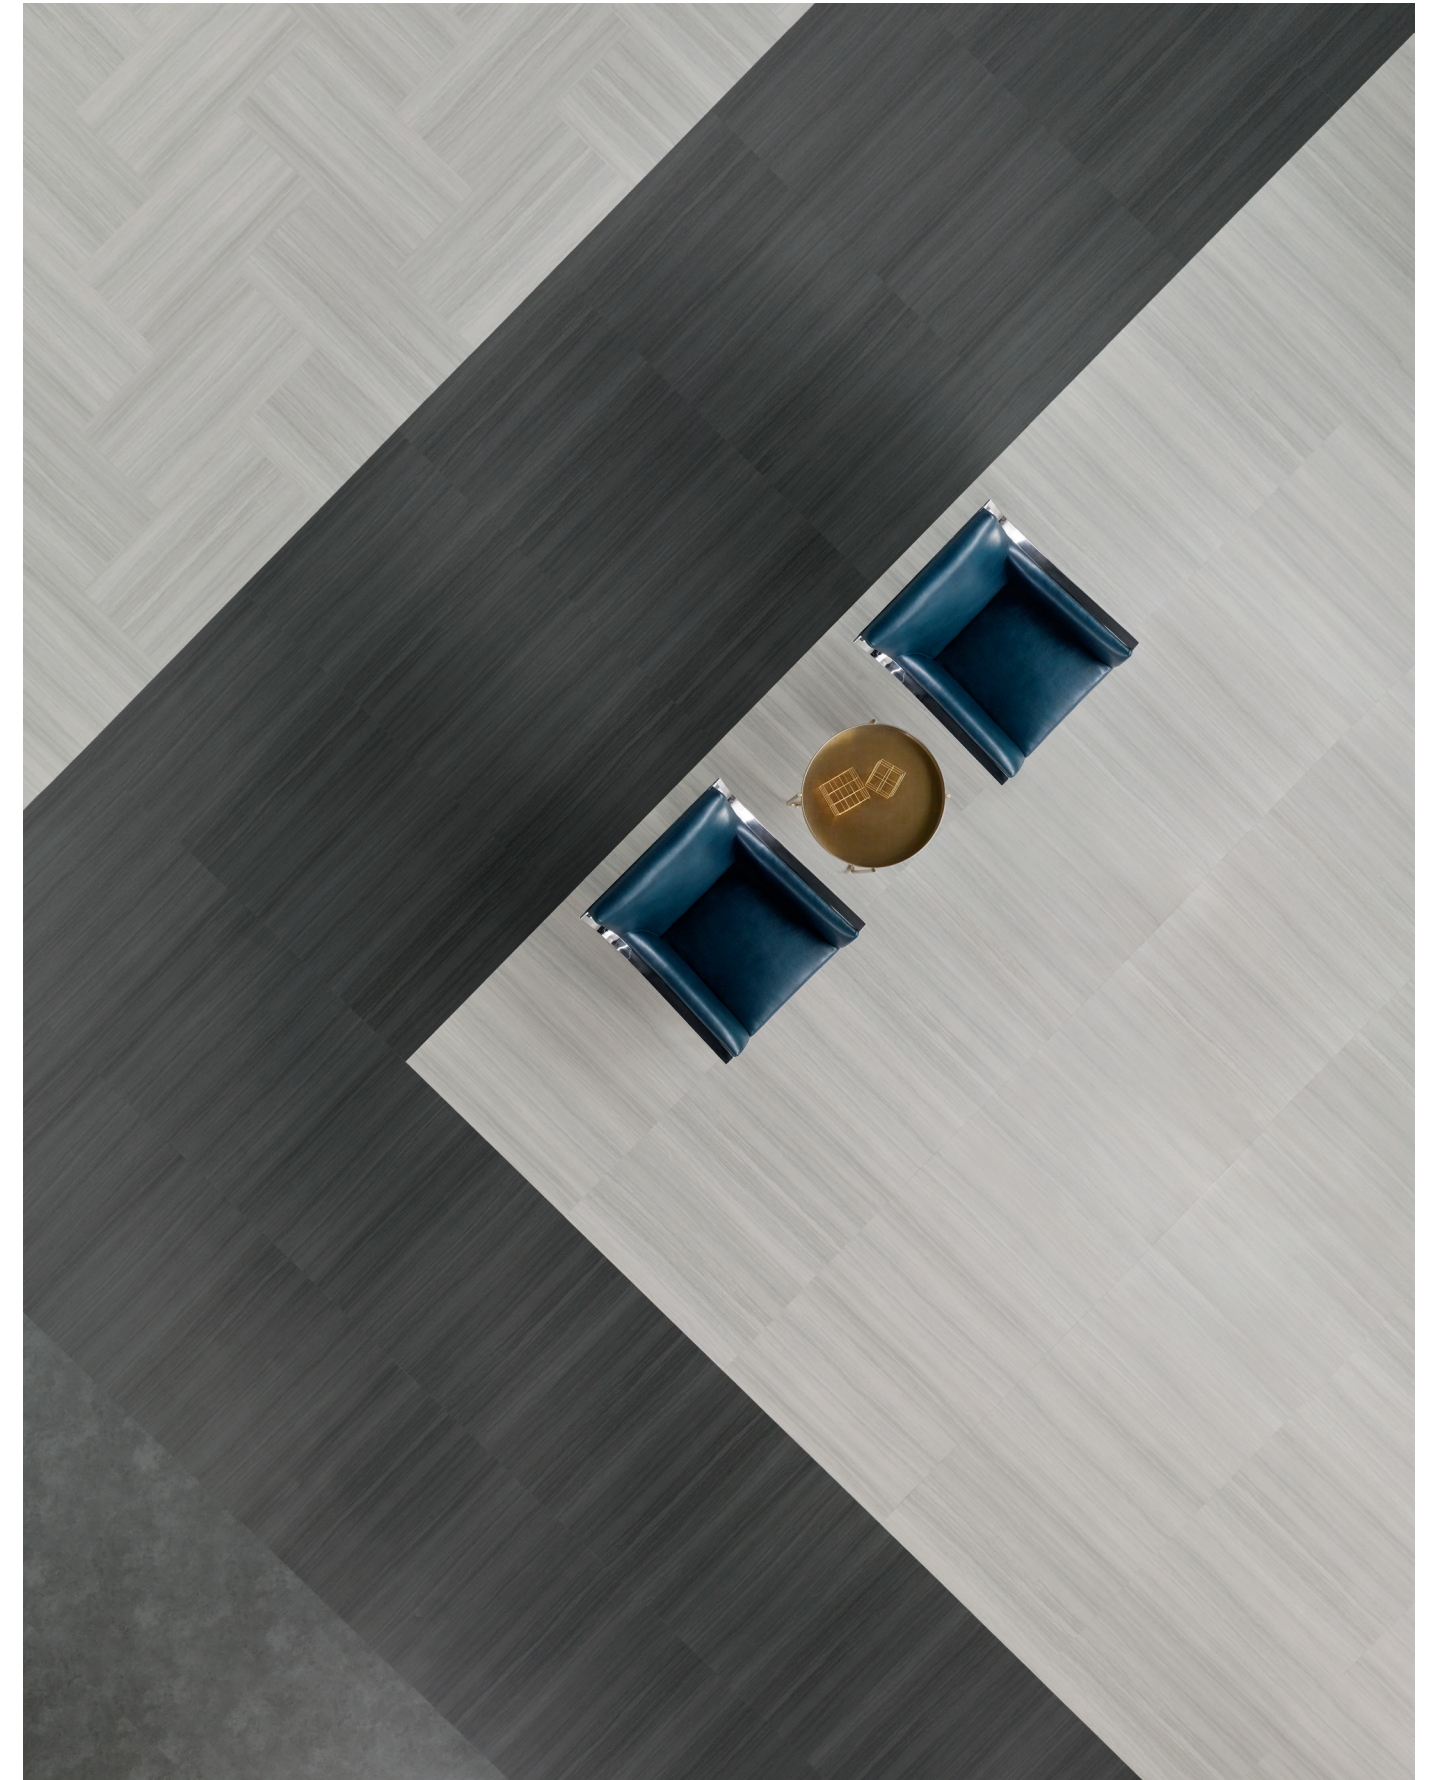

STRAND (0516V) IN SILT (16595) + WOOL (16115)
AND **SURFACE (0515V)** IN GRAVEL (15530)



COMPOUND (4074V OR 4077V) IN BASE (77504)

Glue Down LVT with ExoGuard+™

Features + Benefits:

- Easy installation and maintenance.
- Competitive price point.
- Commercial Limited Warranty, covering manufacture defects and wear.
- 10 Year Under Bed Warranty, bond warranty when used with appropriate products.
- Available in 2.5 mm, 3 mm and 5 mm thick options.
- The 5 mm thick options can be installed next to most carpet tiles without the need for transition strips.
- The 5 mm thick options improve sound transmission and sound impact.
- ExoGuard+™ provides industry-leading stain resistance and improved cleanability for use in demanding environments, along with providing superior durability qualities such as scratching and abrasion resistance.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

LIGHT COMMERCIAL	HEAVY COMMERCIAL			
Terrain II 12 mil 2.5 mm 0453V	Abide 20 mil 2.5 mm 4107V	Compound 20 mil 5 mm 4077V	Mindset 20 mil 2.5 mm 4124V	Thoughtful 20 mil 5 mm 4122V
	Cast 20 mil 2.5 mm 4097V	Inspire 20 mil 2.5 mm 0884V	Terrain II 20 mil 2.5 mm 0454V	Type 20 mil 5 mm 4142V
	Cast 20 mil 5 mm 4098V	Inspire 20 mil 5 mm 4120V	Terrain II 20 mil 5 mm 4110V	Terrain II 30 mil 3 mm 0892V
	Coded 20 mil 5 mm 4143V	Joy Squared 20 mil 2.5 mm 0993V	Terrace 20 mil 2.5 mm 4108V	
	Compound 20 mil 2.5 mm 4074V	Kind 20 mil 5 mm 4123V	Terrace 20 mil 5 mm 4216V	

Glue Down LVT with Acoustic Backing

Features + Benefits:

- Acoustic backing improves sound transmission and sound impact.
- 15 Year Commercial Limited Warranty, covering manufacture defects and wear.
- Available in 5 mm thickness.
- The 5 mm thick options can be installed next to most carpet tiles without the need for transition strips.
- Installation is quick and easy with an attached underlayment, reducing time and labor cost.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with moderate static and rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

LIGHT TO MODERATE COMMERCIAL

Soundscape
20 mil | 5 mm
4063V

Branching Out 5mm LVT
20 mil | 5 mm
4256V



BRANCHING OUT (LVT 4256V) IN ZION OAK (56103)
INSTALLED STAGGER AND **DRIP (RUG G204R)** IN VIBRANT (72585)



Floating LVT with In*Step™ Locking

Features + Benefits:

- Fast and simple glueless installation.
- Can be walked on immediately after installation.
- Tolerates up to 10 lbs CaCl and 95% RH.
- 15 Year Commercial Limited Warranty, covering manufacture defects and wear.
- The 5 mm thick options have an acoustical silencing layer that reduces sound transfer.
- Available in 4 mm and 5 mm thicknesses.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

MODERATE COMMERCIAL

Grain
20 mil | 4 mm
0364V

Pigment
20 mil | 4 mm
0365V

Quiet Cover
20 mil | 5 mm
0186v

Woven LVT

Features + Benefits:

- 15 Year Commercial Limited Warranty, covering manufacture defects and wear.
- As a woven textile, these products do not have a traditional image repeat which results in a soft, organic visual of blended color.
- Engineered to resist stains and scuffs while preventing frayed edges traditionally seen in woven products.
- Design focuses on the structure of the fabric, combining hard surface durability and soft surface aesthetic.
- Available in 3 mm thickness.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

reFrame
3 mm
4004V

reThink
3 mm
0733V

Tailored
3 mm
4111V



RETHINK (0733V) IN CARBON (33505)



COVE (0927V) IN GESSO (27520)

Loose Lay LVT with ExoGuard™

Features + Benefits:

- Ease of installation and repair.
- Recommended glue down for environments with heavy traffic or rolling loads.
- 15 Year Commercial Limited Warranty, covering manufacture defects and wear.
- 10 Year Under Bed Warranty, bond warranty when used with appropriate products.
- Dual purpose backing construction allowing for loose lay or direct glue.
- Available in 5 mm thickness.
- The 5 mm thick options can be installed next to most carpet tiles without the need for transition strips.
- The 5 mm thick options improve sound transmission and sound impact.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Cove
20 mil | 5 mm
0927V

Inlet
20 mil | 5 mm
0926V

Loose Lay LVT with ExoGuard+™

Features + Benefits:

- Ease of installation and repair.
- Recommended glue down for environments with heavy traffic or rolling loads.
- 15 Year Commercial Limited Warranty, covering manufacture defects and wear.
- 10 Year Under Bed Warranty, bond warranty when used with appropriate products.
- Dual purpose backing construction allowing for loose lay or direct glue.
- Available in 5 mm thickness.
- The 5 mm thick options can be installed next to most carpet tiles without the need for transition strips.
- The 5 mm thick options improve sound transmission and sound impact.
- ExoGuard+™ provides industry-leading stain resistance and improved cleanability for use in demanding environments along with providing superior durability qualities such as scratching and abrasion resistance.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Commingle
20 mil | 5 mm
4350V

Inlet II
20 mil | 5 mm
4327V

Union
20 mil | 5 mm
4349V



UNION (LVT 4349V) IN CONCRETE SPINDLE (49140) | INSTALLED STAGGER



STRATUM 500 (023UV) IN TARGHEE WALNUT (00503)

COREtec® (WPC—Wood Polymer Composite)

Features + Benefits:

- 100% waterproof and can be installed in areas with topical moisture.
- Installs 12 times faster than comparable products, right out of the box with no product acclimation time.
- Floating installation allows installation over existing hard surfaces with little or no floor prep, hiding subfloor imperfections.
- Superior dimensional stability with less expansion and contraction than standard LVT.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Features an attached cork underlayment that softens footfall above and below, reducing sound transmission.
- Can be installed glue down or floating.
- 15 Year Commercial Limited Warranty, covering manufacture defects, top down moisture, no acclimation and wear.
- Available in 8 mm, 8.1 mm, 8.2 mm and 8.5 mm thick options.
- Third-Party Verified through EPD, FloorScore® Certification and GreenGuard Gold Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

MODERATE COMMERCIAL

Defined 20 mil 8 mm 058UV	Stratum 700 20 mil 8 mm 024UV	Stratum Eiris 30 mil 8.5 mm 053UV
Stratum 500 20 mil 8 mm 023UV	Stratum XL 20 mil 8.1 mm 034UV	Stratum Linear 30 mil 8.2 mm 055UV

All COREtec® products that have a wear layer of 20 mil and up are recommended for light traffic levels when installed in a floating method and recommended for moderate traffic levels when installed in a direct glue method.

COREtec® (SPC—Solid Polymer Composite)

Features + Benefits:

- 100% waterproof and can be installed in areas with topical moisture.
- Installs 12 times faster than comparable products, right out of the box with no product acclimation time.
- Floating installation allows installation over existing hard surfaces with little or no floor prep, hiding subfloor imperfections.
- Superior dimensional stability with less expansion and contraction than standard LVT.
- Features an attached cork underlayment that softens footfall above and below, reducing sound transmission.
- Can be installed glue down or floating.
- 15 Year Commercial Limited Warranty, covering manufacture defects, top down moisture, no acclimation and wear.
- Available in 4.4 mm, 5 mm and 5.5 mm thick options.
- Premium resistance to indentation.
- Resilient flooring that holds an EPD, is FloorScore® Certified and GreenGuard Gold Certified.
- Third-Party Verified through EPD, FloorScore® Certification and GreenGuard Gold Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

LIGHT COMMERCIAL

Repose
12 mil | 4.4 mm
4089V

LIGHT TO MODERATE COMMERCIAL

**Branching Out
COREtec® 12 mil SPC**
12 mil | 4.4 mm
4308V

**Branching Out
COREtec® 20 mil SPC**
20 mil | 5.5 mm
4308V

Composed
20 mil | 5.5 mm
098UV

Concrete
20 mil | 5.5 mm
094UV

Expression
20 mil | 5.5 mm
4069V

Respite
20 mil | 5 mm
4090V

All COREtec® products that have a wear layer of 20 mil and up are recommended for light traffic levels when installed in a floating method and recommended for moderate traffic levels when installed in a direct glue method.



BRANCHING OUT (CORETEC 4309V) IN SMOKY OAK (56516) | INSTALLED STAGGER AND **EMBRACE (RUG G001R)** IN TRADITION (01105) AND **SHARE (RUG G004R)** IN EMPATHY (01100)



Rigid Core with InLine Level Edge™ Profile

Features + Benefits:

- 100% waterproof and can be installed in areas with topical moisture.
- Installs 12 times faster than comparable products, right out of the box with no product acclimation time.
- Rigid Core construction allows installation over existing hard surfaces with little or no floor prep, hiding subfloor imperfections.
- Superior dimensional stability with less expansion and contraction than standard LVT.
- ExoGuard+™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- Glue down installation
- 15 Year Commercial Limited Warranty, covering manufacture defects, top down moisture, no acclimation and wear.
- No Indentation Warranty
- Available in 4mm thickness
- Polish-optional finish that can reduce the cost of annual maintenance.
- Third-Party Verified through EPD and FloorScore® Gold Certification.
- Resists indentation due to high PSI tolerance.
- Construction provides added sound dampening from floor-to-floor transfer.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Cover
20 mil | 4 mm
4140V

Envelop
20 mil | 4 mm
4141V

Terrain II Rigid Core
20 mil | 4 mm
4125V

Rigid Mineral Core with InLine Level Edge™ Profile

Features + Benefits:

- Resistant to staining and abrasion making it durable for demanding environments.
- Rigid Core construction allows installation over existing hard surfaces with little or no floor prep, hiding subfloor imperfections.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- No finishing, waxing, buffing or stripping required, lowering the total cost of long-term ownership.
- The Rigid Mineral Core is 100% waterproof and can be installed in areas with topical moisture, like bathrooms and kitchens – backed by top-down moisture warranty.
- 15 Year Commercial Limited Warranty, covering manufacture defects, top down moisture, no acclimation and wear.
- Rigid Core construction provides added sound dampening from floor-to-floor sound transfer.
- 6mm Rigid Core can be installed next to most EcoWorx® and EcoLogix® carpet tiles without the need for transition strips.
- Free of Ortho-Phthalates and heavy metals.
- The core layer is made of a mineral composite and avoids the use of plastic polymers, making it PVC-free.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Origin
4338V

Basis
4339V

Our Rigid Mineral Core products are also PVC-Free. Please see page 25 for PVC-Free options.



BASIS (RIGID MINERAL CORE 4339V) IN MATRIX (39585) | INSTALLED STAGGER



INNATE STRIA (RESILIENT TILE 4367V) IN OCEAN (67416), DUNE (67105), CLAY (67130) | INSTALLED STAGGER

PVC-Free Resilient

Features + Benefits:

- PVC-Free resilient flooring that is Cradle to Cradle Certified™ Silver; FloorScore® Certified and has a LEED v4 contributing HPD, EPD and Declare.
- Bio-Based Polyurethane construction, derived from canola, castor and rapeseed oils—free of ortho-phthalates, chlorine and solvents.
- ExoGuard+™ advanced top-coat technology delivers the highest martindale rating to scratch resistance and resists UV light degradation, hand sanitizers, disinfectants and common stains.
- Available in sheet and tile for seamless transitions and versatility.
- 15 Year Commercial Limited Warranty, covering manufacture defects and wear. For sheet, it also covers top down moisture.
- Non-porous construction offers simple maintenance requirements that involve no finishing, waxing, buffing or stripping, lowering the total cost of long-term ownership, and avoiding harsh chemicals.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Available in 2.5 mm thickness.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

In Tandem Tile 2.5 mm 0896V	Innate Linen 2.5 mm 4366V	Innate Sheet 2.5 mm 4219V
In Tandem Sheet 2.5 mm 0897V	Innate Tile 2.5 mm 0895V	Innate Stria 2.5 mm 4367V

Our Rigid Mineral Core products are also PVC-Free. Please see page 22 for more information.

Homogeneous Sheet

Features + Benefits:

- True through-body construction provides excellent durability, superior gouge and abrasion resistance.
- Designed for demanding environments with heavy foot traffic.
- Easy to heat weld and flash cove for infection control.
- 15 Year Commercial Limited Warranty, covering manufacture defects, wear and top down moisture.
- 10 Year Under Bed Warranty, bond warranty when used with appropriate products.
- Resistant to medical stains including betadine, blood and hand sanitizer.
- Polish-optional finish that can reduce the cost of annual maintenance.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Available in 2 mm thickness.
- Third-Party Verified through EPD and FloorScore® Gold Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Vitality
2 mm
0873V

Vitality Hues
2 mm
4376V

Vitality Tones
2 mm
4375V



VITALITY HUES (4376V HOMOGENEOUS SHEET) IN EXCEL (00330), VERVE (00326), VIGOR (00325)



NATURELIFE WOOD II (0002V) IN VINTAGE HICKORY (09635)

Heterogeneous Sheet

Features + Benefits:

- High performance layers offer design flexibility ideal for heavy commercial traffic.
- ExoGuard™ finish adds resistance to staining and abrasion making it durable for demanding environments.
- 15 Year Commercial Limited Warranty, covering manufacture defects, wear and top down moisture.
- 10 Year Under Bed Warranty, bond warranty when used with appropriate products.
- Resistant to common medical stains.
- Performs in environments with heavy static and heavy rolling loads per ASTM test methods.
- Easy to heat weld and flash cove for infection control.
- Available in 1.4 mm, 2 mm and 2.2 mm thick options.
- Polish-optional finish that can reduce the cost of annual maintenance (except styles Adventure + Rendition).
- Third-Party Verified through EPD and FloorScore® Gold Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

LIGHT COMMERCIAL	HEAVY COMMERCIAL		
Artesian 10 mil 2 mm 0718V	Basstones 20 mil 2.2 mm 0301V	Reed 20 mil 2.2 mm 0797V	Tatami 20 mil 2.2 mm 0796V
Adventure 12 mil 1.4 mm 4057V	Inhabit 20 mil 2.2 mm 4106VV	Rendition 20 mil 2.2 mm 4062V	
	Naturelife Wood II 20 mil 2.2 mm 0002V	Roji 20 mil 2.2 mm 0798V	

Sports Floor

Features + Benefits:

- Meets NCAA and EN standards for ball bounce-back percentage and has softer acoustics for a quieter gym.
- Closed cell foam backing designed specifically for gym floors.
- Available in wood visuals and solids.
- 10 Year Commercial Limited Warranty for gym floors, covering manufacture defect.
- Absorbs shock, impact and offers optimum traction and slip resistance for the prevention of fatigue and injuries.
- Polyurethane coating seals out dirt and eliminates the need for polishes or finishes.
- Simple maintenance involves daily dry mopping and wet mopping as needed.
- Available in 6.5 mm thickness.
- Performs in environments with heavy traffic per ASTM test methods.
- Third-Party Verified through EPD and FloorScore® Gold Certification.
- Free of Ortho-Phthalate plasticizers.

*See usage chart for areas to avoid and more detail on specific recommended installs.

All Products Offered in Platform

HEAVY COMMERCIAL

Rexcourt 6.5
37—57 mil | 6.5 mm
0004V



REXCOURT (0004V) IN GOLDEN CHERRY (01451)

Terms + Information to Know

Bio-Based Resilient

Rapidly renewable materials that are free of ortho-phthalates, chlorine and solvents. They are also non-porous and do not require polish. Shaw Contract's bio-based resilient products are manufactured with canola, castor and rapeseed oils.

Box / Slab Cutting

A process during hard surface tile cutting where the material comes off the lamination line as a continuous roll and is cut into large slabs to make the die cutting process easier.

Die Cut

A process during hard surface tile cutting when the slabs are cut into the exact tile size using a die press.

Floating Floor

An installation method meaning the floor does not need to be nailed or glued to the subfloor and can be installed over most existing floors, including concrete, ceramic, vinyl, wood and even some indoor / outdoor carpet, except high pile carpet.

Gloss

This refers to the amount of light that refracts off the surface of a product and can be influenced by the emboss and the amount of talc added to the ExoGuard™ layer. Shaw Contract targets an 8–10 gloss level, this higher range is ideal in terms of performance.

Higher gloss means:

- Less talc in the Exoguard™ which translates to less noticeable scratches
- A stronger cure of the UV resulting in a more scratch resistant product

Glue Down

An installation method in which the flooring product is glued directly to the floor, subfloor or underlayment.

Heterogeneous Sheet

Heterogeneous sheet is made by layering a backing, core, print film, a wear layer and a top coat to create a multi-layered product. These products have more visual range due to printed film and can be heat welded together to create seams that are impenetrable to liquids and dirt. This construction is ideal for acute care and certain senior living environments. In acute care, it is used through the facility in corridors, patient rooms, nurse's stations and ERs to name a few. In senior living these can be used in resident kitchens, bathrooms, cafeterias or in salons.

Homogeneous Sheet

Homogeneous sheet is created by pressing a small vinyl chip of solid color together using heat and pressure to create a single sheet good. A true homogeneous sheet only has one layer and is more limited visually as it does not have a print film. However, the visual can be manipulated based on the size, shape and color of the vinyl chips that are blended. They can also be heat welded together to create seams that are impenetrable to liquids and dirt. This construction is ideal for acute care environments. These products are made for sterile environments like ORs and laboratories. It is ideal for these environments because if sharp medical tools are dropped and gouge the surface of the floor, the color and material beneath the gouge is the same as the top of the material.

Lamination*

Products are made by laminating different layers together. Different products have slightly different constructions, but your standard Shaw Contract LVT will have the following layers:

1. ExoGuard™ Quartz Enhanced Urethane
2. Wear Layer
3. Print Film
4. Core
5. Commercial Backing Layer

*The **ExoGuard™** is a topical treatment that goes over the wear layer for additional protection. It is an added layer of defense before the wear layer.

- Polyurethane based
- Has added talc to bring down gloss level
- Coating that has been cured with UV light to add lightfastness
- Added quartz for extra scratch resistance

Wear Layer is a PVC film that goes over the print film layer during lamination, measured in mils:

- 8 mil wear layer residential / multifamily housing
- 12 mil wear layer residential / multifamily housing / senior living / light commercial
- 20 mil wear layer standard heavy commercial
- 30 mil wear layer heavy commercial

Loose Lay

An installation method for fiberglass-backed vinyl sheet floors where no adhesive (loose lay) or adhesive used just in strategic spots such as under appliances (modified loose lay) is used for installing the floor.

Miling & Cutting

- For LVT—Slabs are run through a die cut and are punched down to size
- For Click LVT—Slabs are cut using a die, then they travel through tooling machines to notch out the edge to make room for the profile
- For Sheet—Rolls run through a line that trims off the selvage

mm v.s. mil

These are two different units of measurement, mm is used to communicate overall product thickness and mil use to communicate wear layer thickness.

- mil—is a unit of measurement, 1/1000th of an inch, not short for millimeter. Measures the thickness of the wear layer.

Importance of 5 mm LVT

5 mm LVT is transitionless when installed alongside carpet tile and will show slight IIC improvement.

Precision Cut

A process during hard surface tile cutting when the visual is perfectly aligned with the die cut to ensure the tile cuts an exact area of the pattern every time.

PVC


(Poly Vinyl Chloride) is a synthetic plastic.

SPC / XRC

Solid Polymer Composite.

WPC

Wood Polymer Composite.

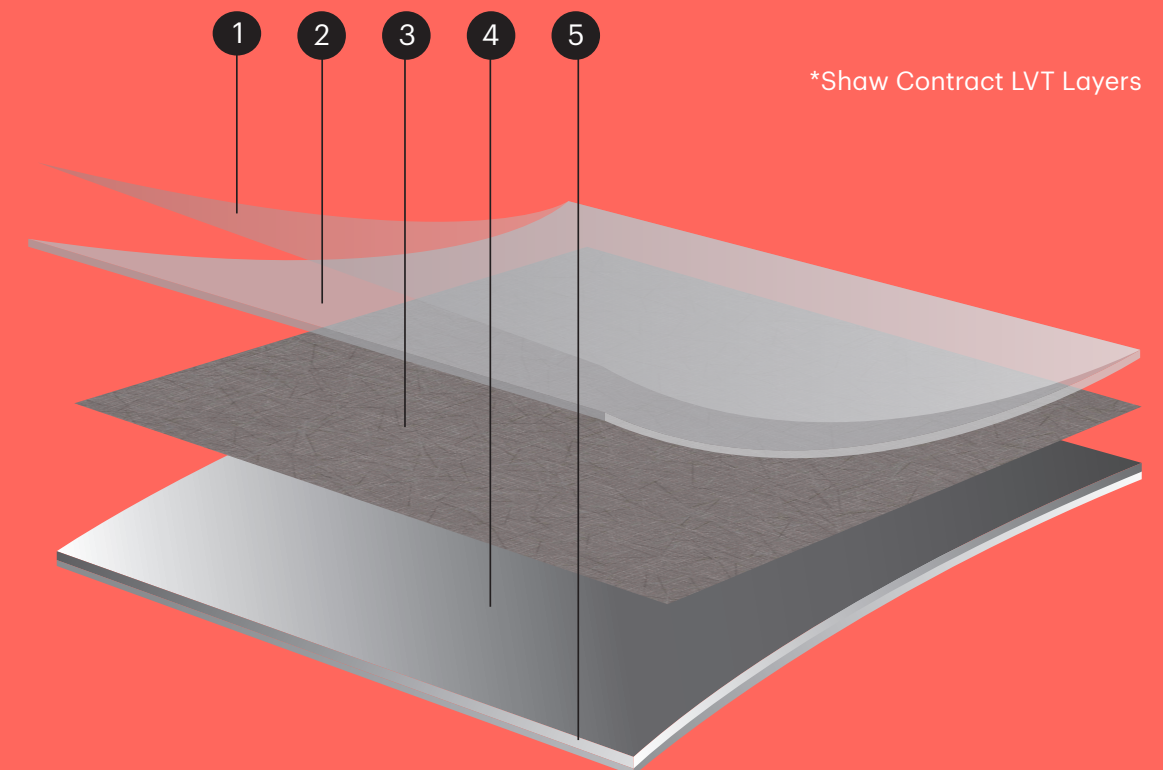

*Shaw Contract LVT Layers

230 Douthit Ferry Road
Cartersville, GA 30120

Phone: 877.502.7429

Email: inforum@shawcontract.com

Website: shawcontract.com



ShawContract®