FLOORING STANDARDS

Sonesta ES Suites Bunting Scheme

ACCOUNT MANAGER

Karen Perkins

karen.perkins@shawcontract.com 804 683 6455

CUSTOMER SERVICE

Courtni Cartwright

courtni.cartwright@shawinc.com 706.217.3454

VP STRATEGIC ACCOUNTS

Desiree Perkins

desiree.perkins@shawcontract.com 404.452.3055





Why Shaw Contract Hospitality?

- By selecting materials that are sustainably sourced, long-lasting and free of harmful chemicals, hotels can assure guests that their values matter. Shaw Contract Hospitality offers a portfolio of products that satisfy the most stringent sustainability certifications.
- An entire team dedicated to customizing your hospitality project, including design services, visualization, estimating, and install seaming diagrams
- Single point of contact for order entry/monitoring, shipment tracking and expediting, technical services, risk mitigation and problem resolution
- Tailored stocking program based on your forecasting to ensure availability of your standard products and rapid service/reduced lead times

Our Sustainability Story

Everyone should have access to sustainable products for the places where we heal, learn, rest and work. Our brand vision, Smarter Impact, is our call to action to share insights and solutions that help you act on your power for positive change, especially when it comes to making sustainable choices.

Our view of sustainability encompasses not only the environmental health of our products and our operations, but also how our products impact human experience. For more than 20 years, Shaw Contract Hospitality has demonstrated our commitment to the Cradle to Cradle[®] design philosophy and the Cradle to Cradle Certified™ Products Program. More than 90% of the products we manufacture have achieved this prestigious multi-attribute certification, protecting humans and the environment.


















Attributes

- Guest comfort and experience
- High-traffic durability
- Housekeeping support and cleanliness
- Improved acoustics
- Reduced renovation downtime
- · Welcoming, customized design

Product Breadth

- Area Rugs
- Broadloom
- Carpet Tile
- Hardwood
- LVT
- Sheet
- Bio-based Resilient
- COREtec® Resilient
- Accessories



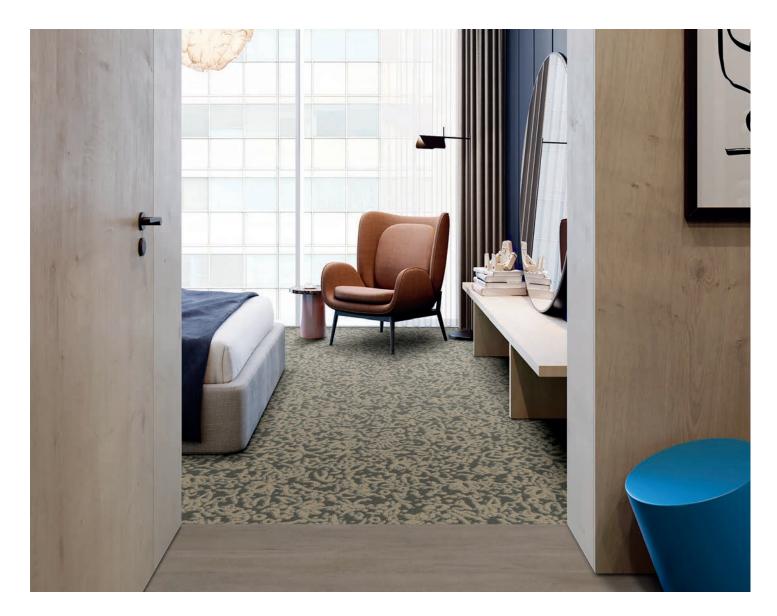

Carpet @ Guestroom ES-G-CPT-2.1

StyleBS642ColorC7963Product TypeBroadloom

FiberEco Solution Q® NylonDye Method100% Solution DyedConstructionMulti-Level Loop Tip ShearTufted Weight32 oz/yd2 | 1085.01 g/m²Gauge1/10 in | 39.37 per 10 cmStitches12.67 per in | 49.88 per 10 cm

Size 12 ft | 3.66 m


Pattern Repeat 48 in x 48 in | 121.92 cm x 121.92 cm

Backing Classicbac® Installation Stretch-In

Warranty 10 Year Commercial Limited



For sample, order BS642 color C7963.

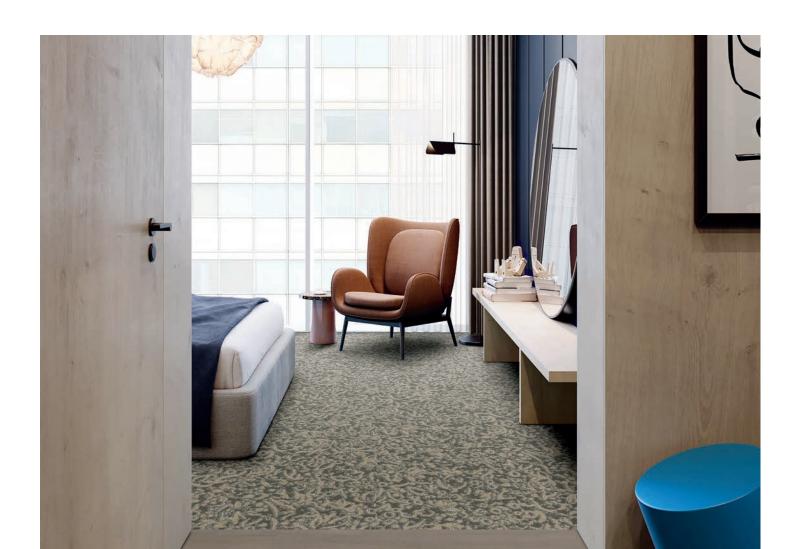



For sample, order BS700 color D9028.

Carpet Tile @ Guestroom ES-G-CPT-2.1-T-A

Style BS700
Color D9028
Product Type Carpet Tile
Fiber Eco Solution Q® Nylon
Dva Mathed

 Dye Method
 100% Solution Dyed

 Construction
 Multi-Level Loop Tip Shear

 Tufted Weight
 30 oz/yd2 | 1017.2 g/m²


 Gauge
 1/10 in | 39.37 per 10 cm

 Stitches
 12.33 per in | 48.54 per 10 cm

 Size
 24 in x 24 in | 60.96 cm x 60.96 cm

BackingEcologix® TileInstallationDirect GlueApproved Install MethodAshlar

Warranty Lifetime Commercial Limited

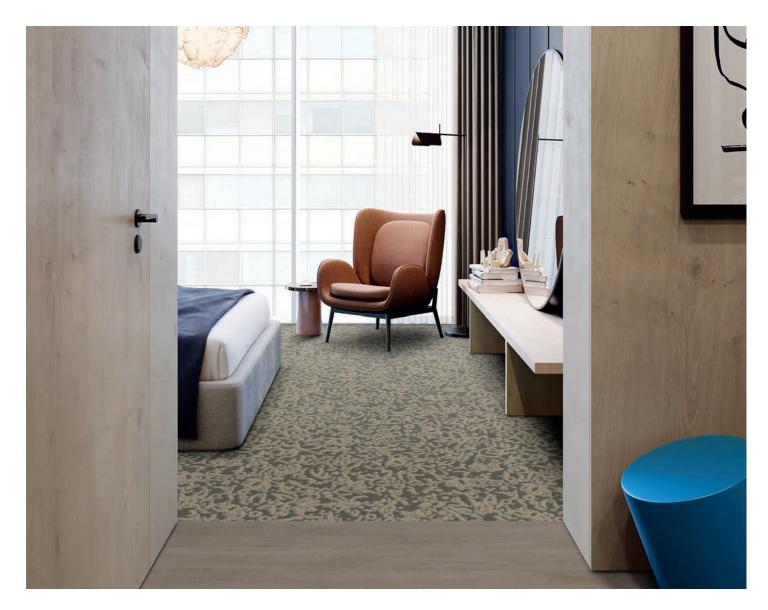

Guestroom LVT

 Style
 BS633

 Color
 63155

 Construction
 Commercial Luxury Vinyl Tile with Acoustic Backing

Wear Layer Thickness20 mil | 0.02 in | 0.51 mmOverall Thickness0.197 in | 5 mm

Nominal Dimensions 6 in x 48 in | 15 cm x 122 cm **Actual Dimensions** 6 in x 48 in | 15.24 cm x 121.92 cm


InstallationDirect GlueApproved Install MethodStagger

Area per box20 sq ft | 10 pcs per boxWarranty15 Year Commercial Limited



For sample, order BS633 color 63155.

NOTES

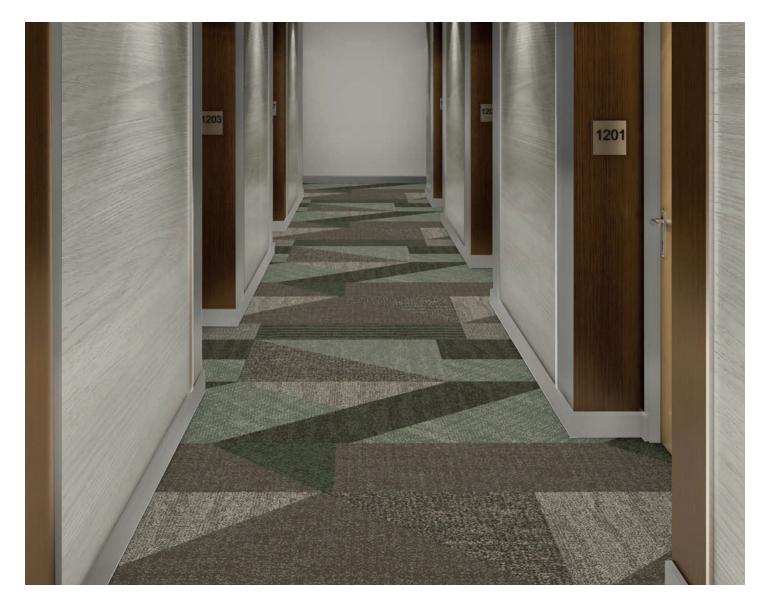

Carpet @ Guest Corridor ES-G-CPT-1.1-A

Style BS645 C9083 Color **Product Type** Broadloom

Fiber Eco Solution Q® Nylon Dye Method 100% Solution Dyed Multi-Level Loop Tip Shear Construction **Tufted Weight** 36 oz/yd2 | 1220.64 g/m² Gauge 1/10 in | 39.37 per 10 cm Stitches 10 per in | 39.37 per 10 cm

Size 12 ft | 3.66 m

72 in x 134.4 in | 182.88 cm x 341.38 cm **Pattern Repeat**


Backing Ultraloc® Installation Direct Glue

Warranty Lifetime Commercial Limited



For sample, order BS645 color C9083.



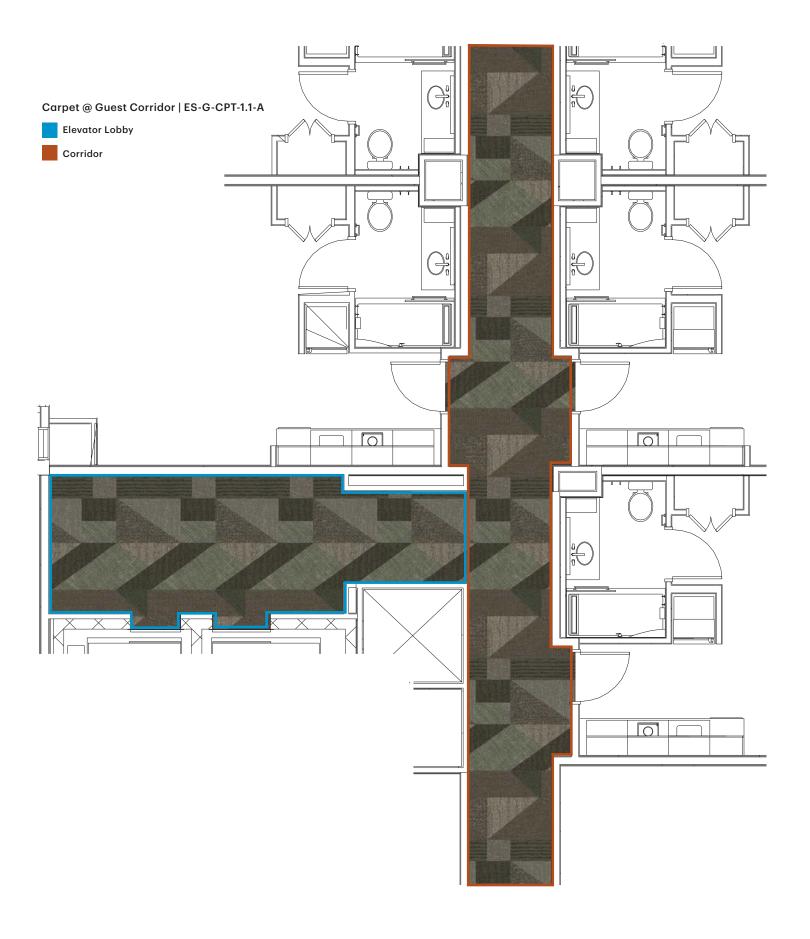





Carpet Tile @ Guest Corridor ES-G-CPT-1.1-T-A

BS646 Style Color C9084 **Product Type** Carpet Tile

Eco Solution Q® Nylon Fiber Dye Method 100% Solution Dyed Construction Multi-Level Loop Tip Shear 30 oz/yd2 | 1017.2 g/m² **Tufted Weight** Gauge 1/10 in | 39.37 per 10 cm Stitches 9 per in | 35.43 per 10 cm


Size 24 in x 24 in | 60.96 cm x 60.96 cm

Ecologix® Tile **Backing** Installation Direct Glue **Approved Install Method** Ashlar

Warranty Lifetime Commercial Limited



For sample, order BS646 color C9084.

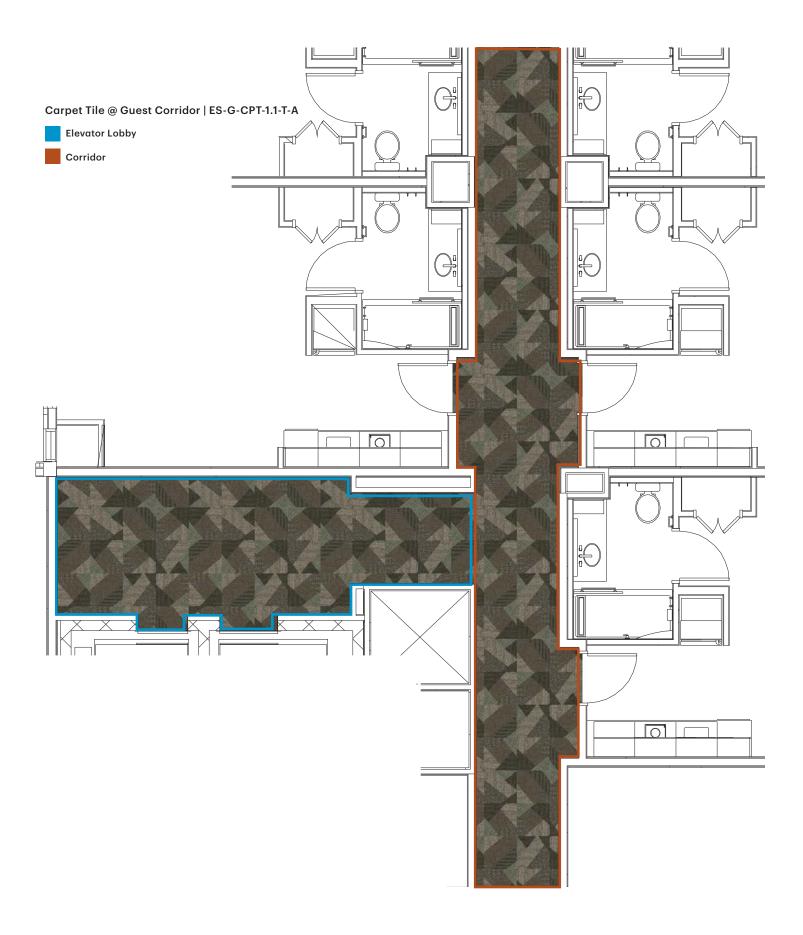

Public Space Inset Rug Edge | ES-P-CPT-2.1-A

StyleBS629Color05100Product TypeCarpet Tile

FiberEco Solution Q® NylonDye Method100% Solution DyedConstructionMulti-Level Pattern LoopTufted Weight20 oz/yd2 | 678.1 g/m²Gauge1/10 in | 39.4 per 10 cmStitches9 per in | 36.5 per 10 cmSize9 in x 36 in | 23 cm x 91 cm

Backing Ecoworx® Tile
Installation Direct Glue
Approved Install Method Ashlar

Warranty Lifetime Commercial Limited



For sample, order BS629 color 05100.

Public Space Layered Inset Rug | ES-P-CPT-1.1-A

StyleBS630Color41462Product TypeCarpet Tile

Fiber Eco Solution Q® Nylon

Dye Method 100% Piece Dyed

Construction Cut Pile

 Tufted Weight
 36 oz/yd2 | 1220.6 g/m²

 Gauge
 1/10 in | 39.4 per 10 cm

 Stitches
 10.5 per in | 42.5 per 10 cm

 Size
 24 in x 24 in | 61 cm x 61 cm

BackingEcoworx® TileInstallationDirect GlueApproved Install MethodAshlar

Warranty Lifetime Commercial Limited



For sample, order BS630 color 41462.

Public Space Inset Rug | ES-P-CPT-3.1-A

StyleBS631Color27585Product TypeCarpet Tile

Fiber Eco Solution Q® Nylon

Dye Method 100% Solution Dyed

Construction Multi-Level Pattern Cut/Loop

Tufted Weight 28 oz/yd2 | 949.4 g/m²

Gauge 1/10 in | 39.4 per 10 cm

Stitches 9 per in | 35 per 10 cm

Size 18 in x 36 in | 46 cm x 91 cm

BackingEcoworx® TileInstallationDirect GlueApproved InstallAshlar

Method Warranty Lifetime Commercial Limited



For sample, order BS631 color 27585.






Carpet @ Meeting Room | ES-P-CPT-5

StyleBS628Color38518Product TypeCarpet Tile

FiberEco Solution Q® NylonDye Method100% Solution DyedConstructionMulti-Level Pattern LoopTufted Weight19 oz/yd2 | 644.2 g/m²Gauge1/12 in | 47.2 per 10 cmStitches8.5 per in | 33 per 10 cmSize9 in x 36 in | 23 cm x 91 cm

BackingEcoworx® TileInstallationDirect GlueApproved Install MethodAshlar

Warranty Lifetime Commercial Limited



For sample, order BS628 color 38518.





For sample, order BS702 color 90481.

Carpet @ BOH & Stairs | ES-P-CPT-8

StyleBS702Color90481Product TypeBroadloom

FiberEco Solution Q® NylonDye Method100% Solution DyedConstructionMulti-Level Pattern LoopTufted Weight22 oz/yd2 | 745.9 g/m²Gauge1/10 in | 39.4 per 10 cmStitches10.5 per in | 42.5 per 10 cm

Size 12 ft | 3.66 m

Pattern Repeat 12 in x 16 in | 30.48 cm x 40.64 cm

Backing Ultraloc® Installation Direct Glue

Warranty Lifetime Commercial Limited

Additional Products

Cushion @ Guestroom

Square Yards Per Roll 40

Corridor Cushion

Square Yards Per Roll 40

Corridor Cushion

 Style
 DW204

 Description
 DuraWorx

 Weight
 47 oz | 1,593 g/m²

 Thickness
 0.20 in | 5.08 mm

 Density
 19 lb/ft3 | 304 kg/m3

Square Yards Per Roll 30

Guestroom Carpet to LVT Transition

 Style
 146VS

 Color
 00001

Product Type Resilient-Carpet Reducer 1/8"

Construction Thermoplastic Rubber (TPR)

Actual Dimensions 144 in x 1/8 in

Pieces per Carton 3

Warranty 5 Year Commercial Limited

Additional Products

Broadloom Adhesive

Style H1000

Description LokWorx+ Broadloom Adhesive | 4 gallon

Spread Rate 75-100 sf per gallon

Carpet Tile Adhesive

Style N5000

Description LokWorx+ Carpet Tile Adhesive | 4 gallon

Spread Rate 250-300 sf per gallon

LVT Adhesive

Style 164CA

Description LokWorx+ Resilient Adhesive | 4 gallon

Spread Rate 175-225 sf per gallon

LVT Adhesive

Style 179CA

Description LokWorx Resilient Adhesive | 4 gallon

Spread Rate 175-225 sf per gallon

Seam Sealer

Style H4000

DescriptionShaw 4000 | 1 qtSpread Rate550-600 sf per qt

