



Nordic

ShawContract®

At 5mm thick, *Nordic* can be used seamlessly with most carpet tiles without the need of a transition strip. The loose lay optional backing allows for installation over raised access flooring along with a variety of installation methods including glue down, perimeter glue and loose lay. Constructed in 18 cm x 122 cm | 7 in x 48 in plank, *Nordic* allows for maximum installation options including stagger, herringbone, ashlar and brick to fit the need of a variety of spaces. Combine planks to build scale with impactful colour blocking or use one colour to ground a space.

COVER PAGE  
**NORDIC (LVT 4377V) IN RADIANT (77710)**  
INSTALLED STAGGER

RIGHT  
**NORDIC (LVT 4377V) IN GOLDEN (77756) | INSTALLED STAGGER**  
**BISECT (CARPET TILE 5T448) IN AGGREGATE (06501) AND**  
**JACQUARD (CARPET TILE 5T280) IN INDIGO (79596 | INSTALLED STAGGER**





*Nordic* features our maintenance friendly **ExoGuard®** finish with more resistance to abrasion, staining, and improved cleanability. Manufactured without ortho-phthalates, *Nordic* is **Floorscore®** certified for low VOCs.

**NORDIC (LVT 4377V)**  
IN DRIFTWOOD (77120) + BIRCH (77140) + RADIANT (77710)  
INSTALLED STAGGER + HERRINGBONE


*Nordic* can be used seamlessly with carpet tile without the need of a transition strip. With superior scratch resistance and acoustical benefits, they're ideal for the spaces where we work, learn, heal and live.



**NORDIC (LVT 4377V) IN ALDER (77104)**  
INSTALLED STAGGER + HERRINGBONE

## Colour and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess colour.

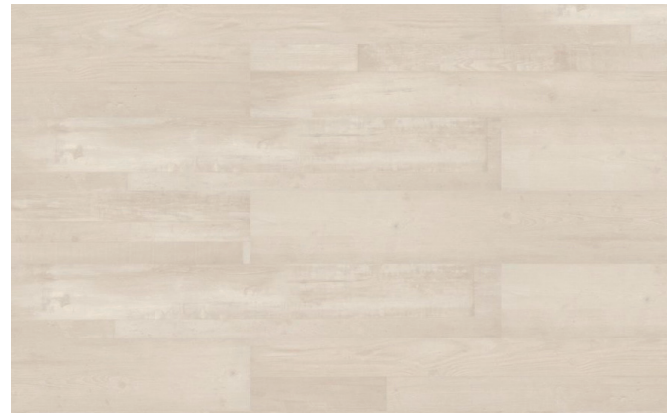

V2 Aspen 77100



V3 Alder 77104




V3 Blonde 77112



V2 Calm 77111



V2 Honey 77103

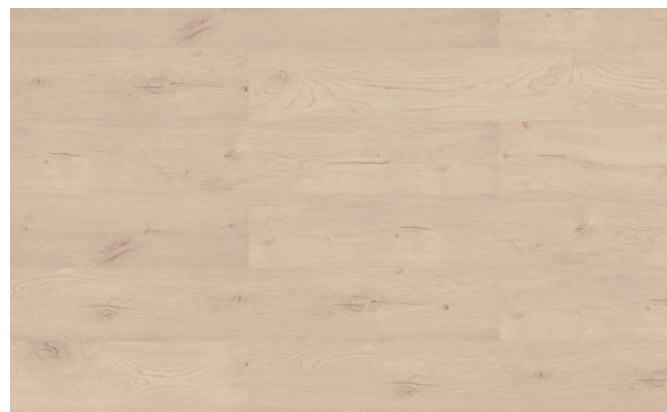

V3 Natural 77101



V3 Driftwood 77120




V2 Birch 77140




V2 Fir 77155




V2 Radiant 77710

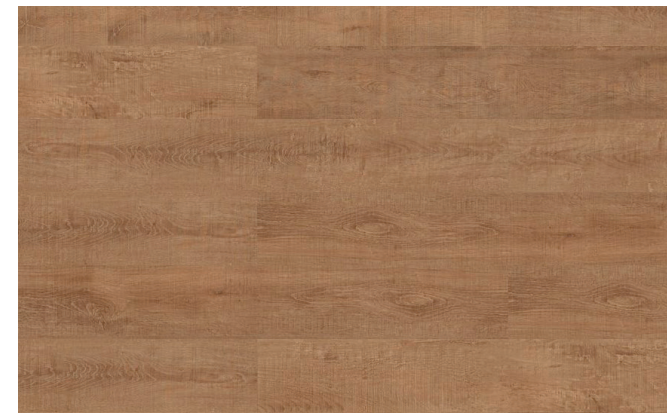

V2 Redwood 77720

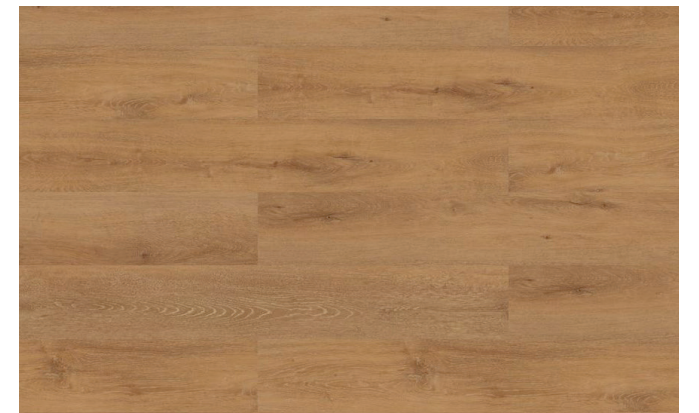

V2 Elm 77721

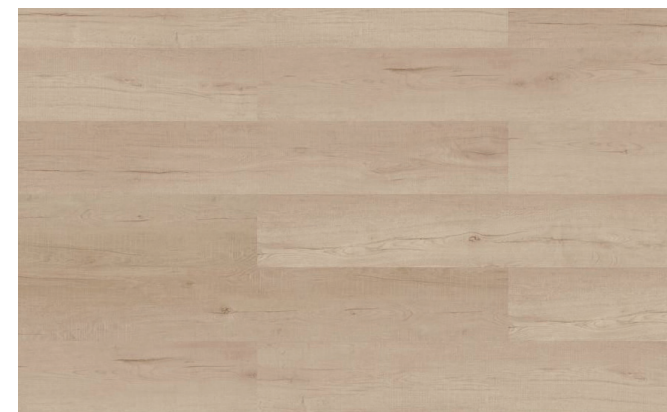

V2 Balance 77755




V3 Golden 77756



NORDIC (LVT 4377V) IN DRIFTWOOD (77120) + BIRCH (77140) + RADIANT (77710) | INSTALLED STAGGER + HERRINGBONE

# Nordic

Nordic has a layered construction that is engineered for enhanced durability in high-demand environments. It features our maintenance-friendly **ExoGuard®** finish with more resistance to abrasion, staining, and improved cleanability. A **dual-purpose backing system** allows this product to be installed as direct glue or loose lay.

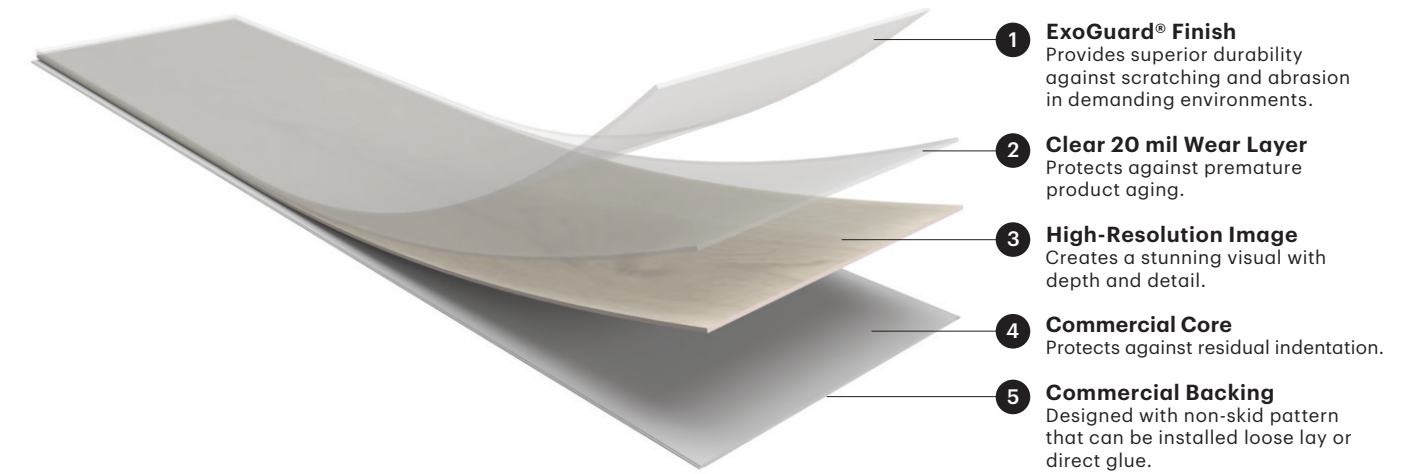

## Superior Durability

ExoGuard™ advanced topical finish technology delivers the highest performance scratch resistance and resists UV light degradation, hand sanitizers, disinfectants and common stains.



## Direct Glue or Loose Lay

The dual-purpose backing construction allows for direct glue or loose-lay installation for more flexibility to support the needs of the space.



## Polish-Optional Reduces Cost

ExoGuard® is a polish-optional finish that can reduce the cost of annual maintenance.



## No Transition Needed

5 mm LVT can be installed next to most carpet tiles without the need for transition strips.



## Performs with Static and Rolling Loads

When direct glued the high PSI tolerance of the product enhances resistance to indentation.



## LEEDv4 Contributions

IEQ – Floorscore IAQ Certification  
MR – RFI Industry Average EPD

## Product Details

### Pattern Repeat

The tile size is not divisible into pattern repeat length resulting in a wide variety of unique tiles after the cutting process.

### Installation Methods

Ashlar, Brick, Stagger, and Herringbone.

## Recommended Applications

Ideal for Heavy Commercial Environments

Workplace | Multi-family | Retail

Light Moderate Heavy

Foot Traffic	████████████████████
Rolling Loads	████████████████████
Static Loads	████████████████████



# Nordic


## Specifications

<b>Style Name</b>	Nordic   20 mil 5 mm
<b>Style Number</b>	4377V
<b>Construction</b>	Heavy Commercial Luxury Vinyl Tile With Fiberglass
<b>Finish</b>	ExoGuard®
<b>Edge Profile</b>	Micro-Bevel
<b>Installation Type</b>	Loose Lay
<b>Installation</b>	Direct Glue, Floating or Perimeter Glue
<b>Recommended Adhesive</b>	LokWorx+ Resilient, LokWorx Resilient, Shaw 4151 or S150 - 95 Spray

	Metric Units	US Units
<b>Nominal Dimensions</b>	18 cm × 122 cm	7 in × 48 in
<b>Wear Layer Thickness</b>	20 mil (0.51 mm)	0.02 in
<b>Overall Thickness</b>	5.0 mm	0.197 in
<b>Actual Width</b>	18.42 cm	7.25 in
<b>Actual Length</b>	121.92 cm	48.00 in
<b>Warranty*</b>	15 Year Commercial Limited	

\*For detailed warranty information visit [shawcontract.com](http://shawcontract.com).

### Recommended Installation Methods

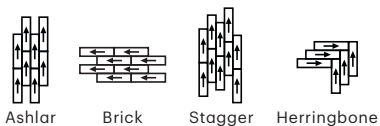

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on [shawcontract.com](http://shawcontract.com). Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

**ShawContract®**