

# Innate + In Tandem

ShawContract®



## Optimum Performance. Healthier Materials.

We believe sustainability encompasses not only the environmental health of our products and our operations, but also how our products impact human experience. Shaw Contract furthers its commitment to safe and healthy materials with *Innate + In Tandem*, a collection of **coordinating tile and sheet** products composed of **bio-based polyurethane**.

*Innate + In Tandem* places performance and sustainability first as a collection of sheet and tile products that draw on the complex beauty and durable properties of natural materials. The collection blends the warm wooden visuals of *In Tandem* with the delicate mineral tones of *Innate* to forge a soothing palette. Both visuals are **available as sheet and tile** with a **matching 2.5 mm thickness** to allow for seamless transitions between spaces.

COVER PAGE:  
**INNATE (RESILIENT TILE 0895V)** IN MINERAL (95760)  
INSTALLED ASHLAR

LEFT:  
**IN TANDEM (RESILIENT SHEET 0897V)** IN RAFFIA (97710)  
INSTALLED STRAIGHT—NON-REVERSE AND  
**IN TANDEM (RESILIENT TILE 0896V)** IN RAFFIA (96710)  
INSTALLED ASHLAR

## Quality of Material, Quality of Life.

Manufactured with canola, castor and rapeseed oils—all **rapidly renewable**, this construction features commonly occurring bio-based materials that are **free of ortho-phthalates, chlorine and solvents**. The sustainable nature, versatile installation and ease of maintenance allow for optimal performance in the demanding environments of healthcare, workplace, education, retail and hospitality.

In all environments, cleanability has a direct relationship to the perception of how a space can impact health. Unlike other products, *Innate + In Tandem* can be cleaned with a **5% bleach solution** and works with most cleaning solutions and disinfectants.

*Innate + In Tandem* are **FloorScore® certified** for low VOCs. While not all emissions are considered unhealthy, odors coming from finished products can impact inhabitants of a space triggering allergies, nausea and headaches. As a part of the design of these products, *Innate + In Tandem* do not have a perceptible smell and **will not contribute to odors** in the places where they are installed.

INNATE (RESILIENT SHEET 4219V) IN NATURAL (95110)  
INSTALLED STRAIGHT—NON-REVERSE










## Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess color.




### Innate Tile 0895V & Innate Sheet 4219V\* | Weld Rod 270VS


AVAILABLE IN TILE + SHEET

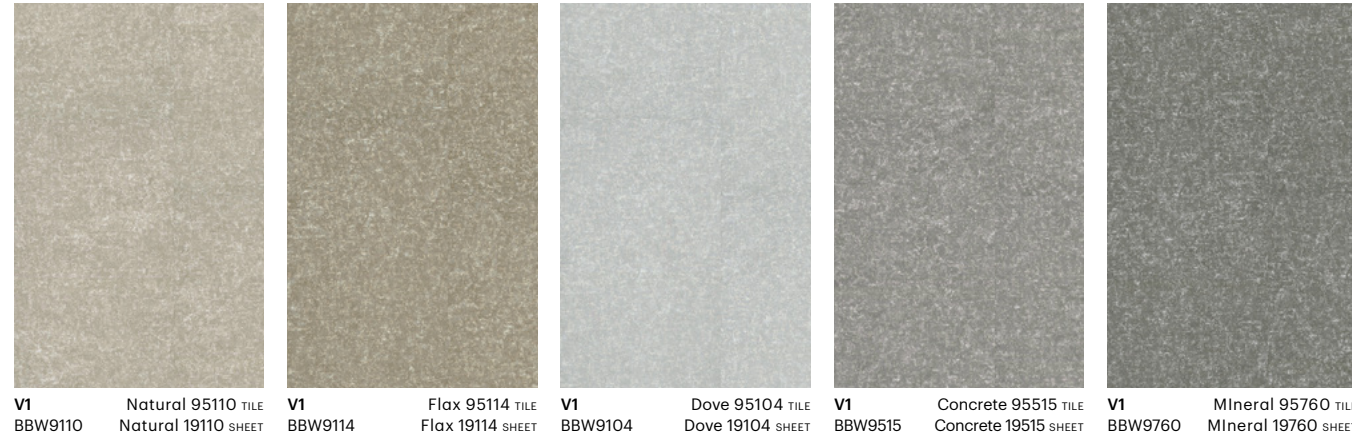

AVAILABLE ONLY IN TILE

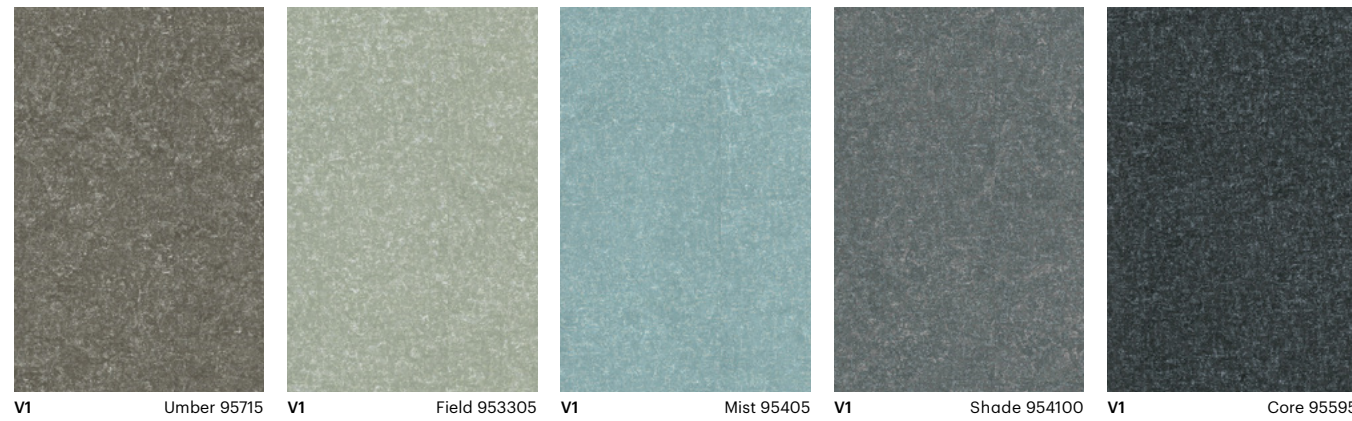

### In Tandem Tile 0896V & In Tandem Sheet 0897V | Weld Rod 270VS

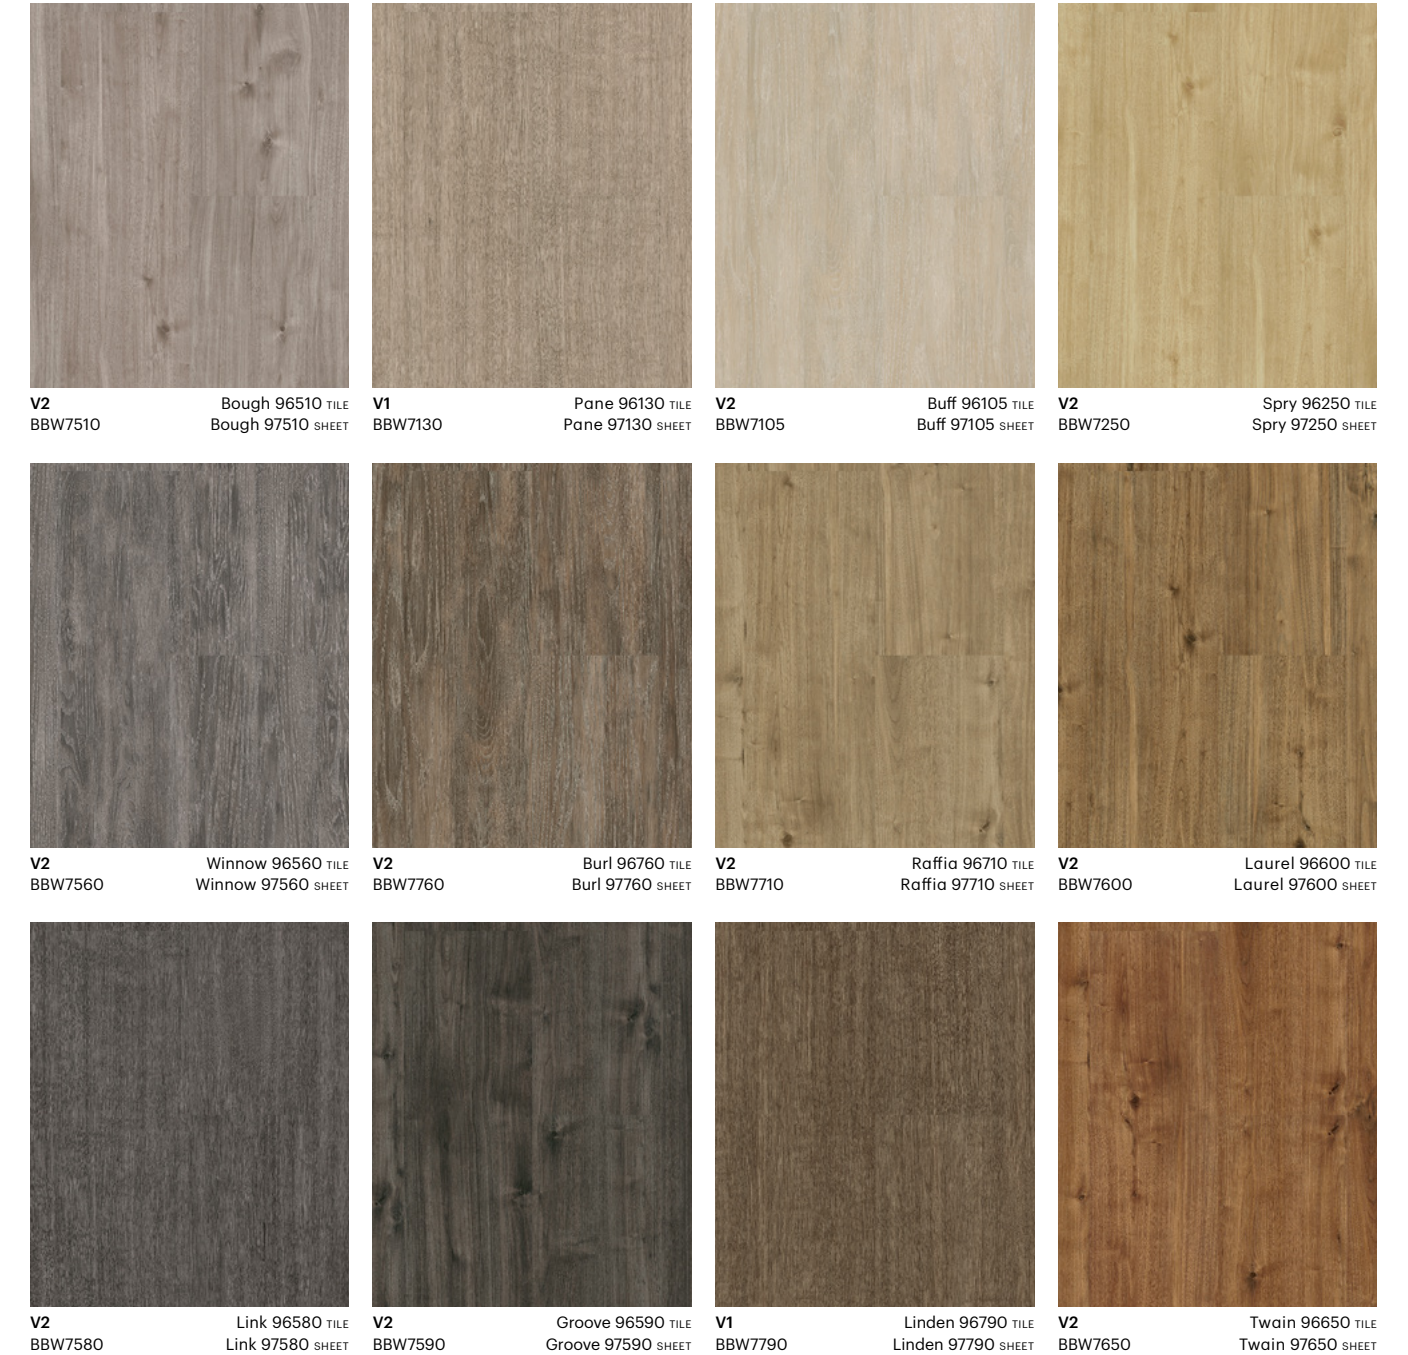

\*Not all colors are available in tile and sheet


# A Sound Choice

Carefully chosen interior materials help you design an acoustic experience that encourages positive emotional and physical responses in the built environment. As a total flooring solutions provider, Shaw Contract offers a wide range of products including hardwood, resilient, broadloom, carpet tile, rugs and accessories. Layer them together to create a holistic experience for the inhabitants of a space without sacrificing performance or aesthetic appeal.

## Impact Insulation Class (IIC)

An IIC (Impact Insulation Class) rating references how well a flooring material reduces impact sounds. When we step across a floor, drop an object or move something across the floor, the movement and impact creates sound vibrations that can travel through the floor, subfloor and ceiling of the room below.


*Innate + In Tandem* increases IIC by 32% when compared to a standard 2.5 mm thick LVT. To hear the impact, visit [shawcontract.sound-advisor.com](http://shawcontract.sound-advisor.com).

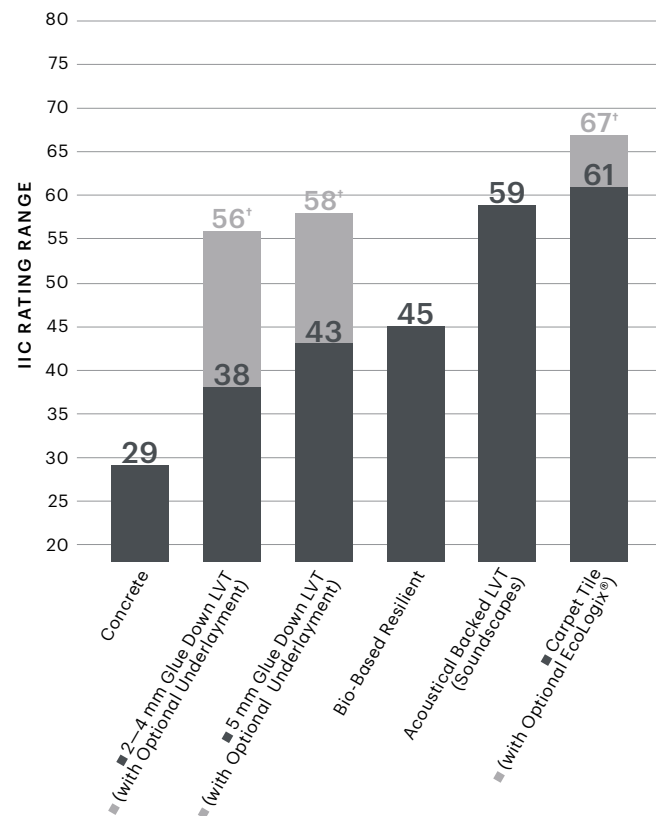

\*Based on 8" (20.32 cm) concrete slab with no ceiling  
 †Option with underlayment/EcoLogix/pad  
 ‡Underlayment is only recommended in housing applications


## Sound Absorption Average (SAA)

A SAA (Sound Absorption Average) rating references the percentages of sound in a room that is absorbed rather than reflected. *Innate + In Tandem* can create a 5% increase in sound absorption over polished concrete alone.

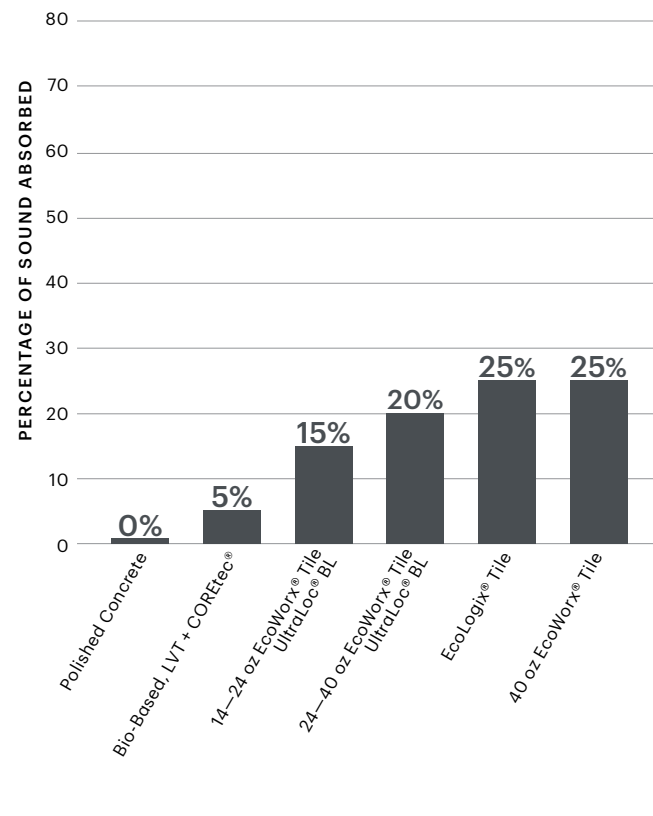

# Innate + In Tandem

**Bio-Based Resilient**—Coordinating tile and sheet featuring the performance and practicality of resilient flooring in a PVC-free construction.

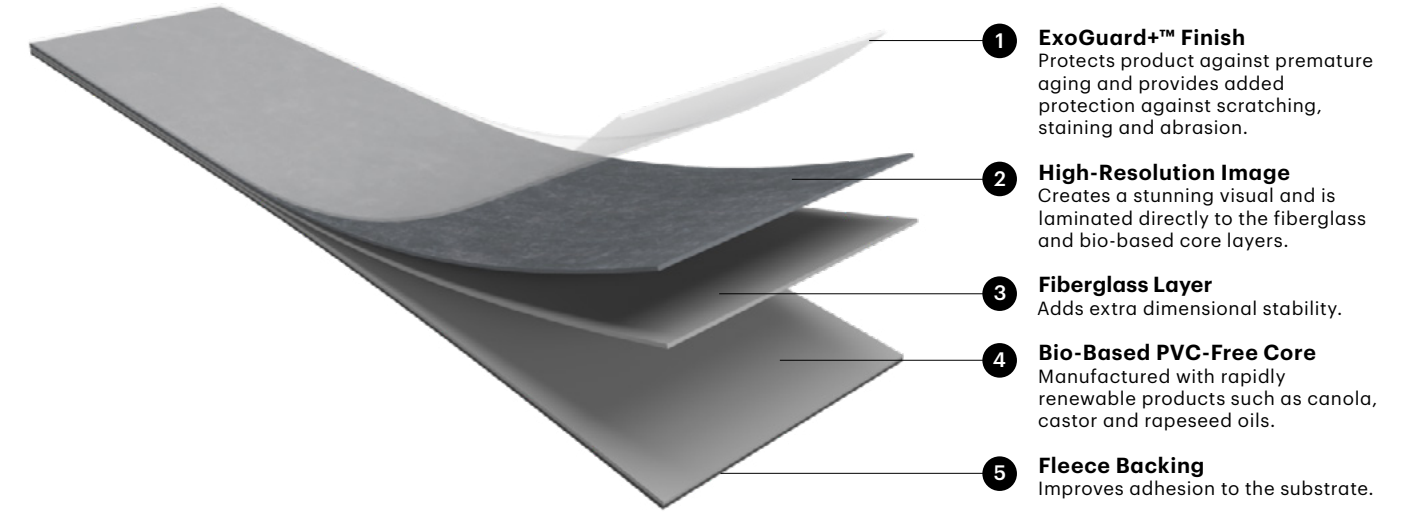

**Durability in Demanding Environments**  
ExoGuard+™ advanced top-coat technology delivers the highest Martindale rating to scratch resistance and resists UV light degradation, hand sanitizers, disinfectants and common stains.

**No Transition Needed**  
*Innate* tile, *In Tandem* tile and *In Tandem* sheet are all 2.5 mm thick, allowing for seamless transitions between coordinating tile and sheet products.

**Lower Cost of Ownership**  
The non-porous construction of these products offers simple maintenance requirements that involve no finishing, waxing, buffing or stripping, lowering the total cost of long-term ownership.

**Performance-Based Design**  
Product visuals range from traditional to contemporary woodgrains and abstracts in a broad and relevant color palette.

**Performs with Static and Rolling Loads**  
The high PSI tolerance of the product enhances resistance to indentation.

**Color-Coordinated Weld Rods**  
*In Tandem* sheet has color-coordinated, PVC-free weld rods for use in areas requiring heat welding. Spools available in 197 linear feet.

## Sustainability

This product achieves Greenhealth Approved certification through Healthcare Without Harm and many other healthy building requirements set forth by individual organizations in education, workplace and hospitality.



## Sheet Pattern Repeat

*Innate* sheet pattern repeat  
7 ft x 4.27 ft | 2.01 m x 1.3 m

*In Tandem* sheet visual plank width  
6 in | 15 cm

*In Tandem* sheet visual plank length  
17 in—60 in | 43 cm—152 cm



---

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on [shawcontract.com](http://shawcontract.com). Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

**ShawContract®**