
# Eon+Amalgam

ShawContract<sup>®</sup>



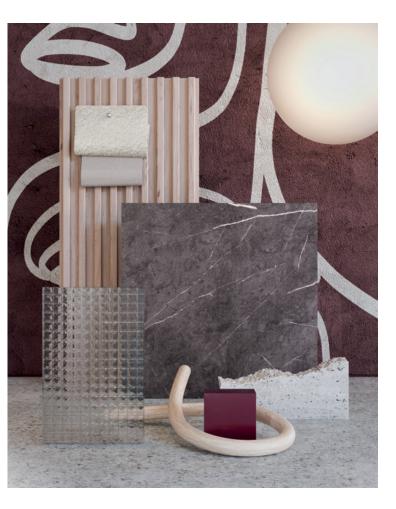


## The Modern Stone Age

Inspired by the raw beauty of nature's most enduring materials, this collection of 20 × 20 inch | 50 × 50 cm LVT blends classical aesthetics and contemporary style with the durability required in high-traffic areas.

*Eon+Amalgam* offer a design spectrum from industrial minimalist to understated elegance, giving them a broad appeal across multiple sectors.

COVER AND LEFT: EON (LVT 4112V) IN OBSIDIAN (12595) | INSTALLED MONOLITHIC AND PLAINS (CARPET TILE 5T374) IN FLORA (71850) | INSTALLED BRICK

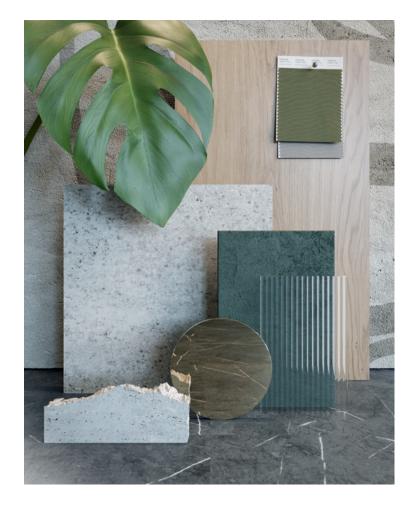


## A Statement Written in Stone

Natural visuals bring a feeling of cutting-edge sophistication that is at once timeless and utterly of the moment. They combine aesthetics with durability and acoustical benefits to bring a tactile effect that adds character and depth.

*Eon+Amalgam* are the ideal alternatives to porcelain, ceramic, and concrete, with easier and more cost-effective installation. These products are loose lay optional, also offering a solution for raised access flooring.



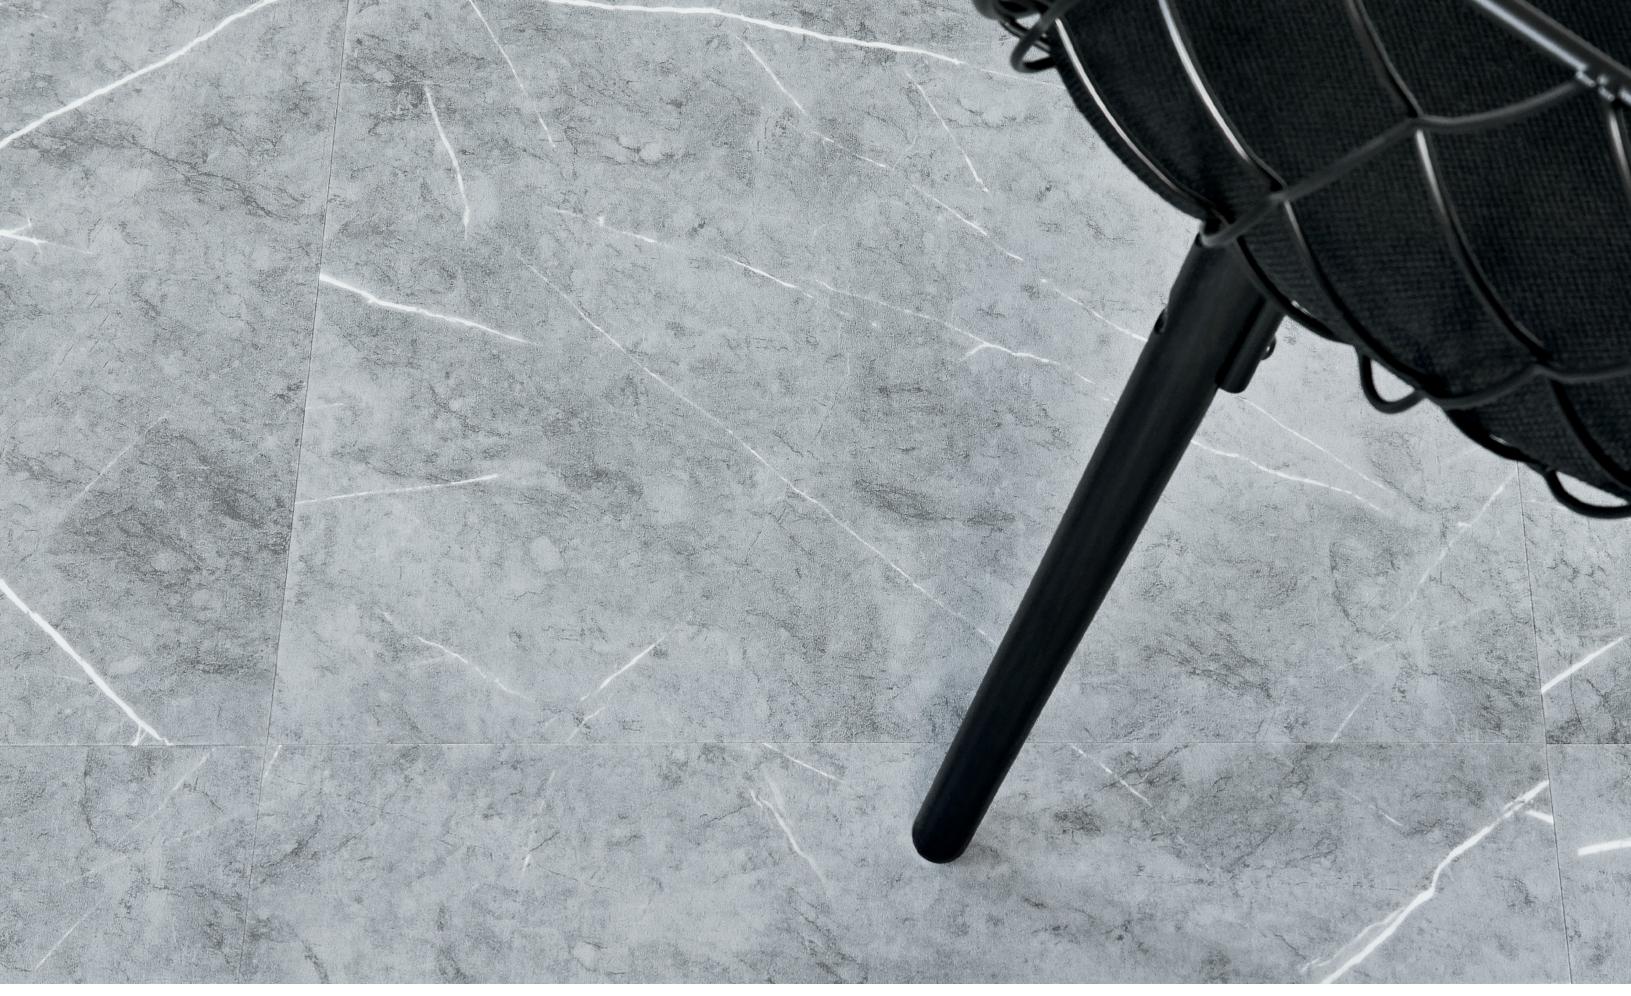

**EON LVT**—Inspired marble designs evoke classical architecture. High contrast veining lends a quietly theatrical power to the design.



8

### **Color and Visual Variation Index**

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess color.

V3











Moderate Variation



Substantial Variation

### Eon LVT 4112V





VΔ

V2



Epoch 12518














Metamorphic 12530 V2






### Amalgam LVT 4113V

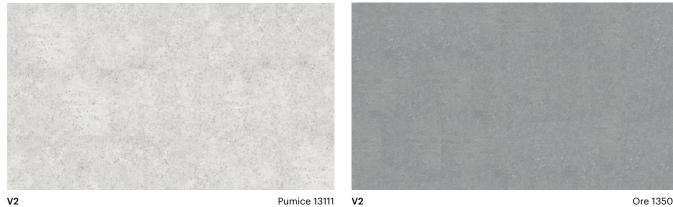



Uncover 13114 V2





Delta 13585 V2

٧2

Ore 13506









Sediment 13518

Excavate 13520



Onyx 13555



The 5 mm thickness works seamlessly with carpet tile without the need for a transition strip. Manufactured without ortho-phthalates, Eon+Amalgam are Floorscore® certified for low VOCs.

EON (LVT 4112V) IN OBSIDIAN (12595) | INSTALLED MONOLITHIC AND PLAINS (CARPET TILE 5T374) IN FLORA (71850) | INSTALLED BRICK

## Eon+Amalgam

Eon+Amalgam each have a layered construction that is engineered for enhanced durability in high-demand environments. It features our maintenance friendly ExoGuard™ finish for resistance to abrasion, staining and improved durability. A dual purpose backing system allows these products to be installed as direct glue or loose lay.



### **Built to Perform**

Proper embossing, lower gloss levels and an ExoGuard<sup>™</sup> topical finish protects against daily stains and abrasion.

**SSS** No Transition Needed

5 mm LVT can be installed next to most carpet tiles without the need for transition strips.



Performs with Static and Rolling Loads

When direct glued the high PSI tolerance of the product enhances resistance to indentation.

### **Product Details**

### Pattern Repeat

Tile size is not divisible into pattern repeat

length resulting in a wide variety of unique tiles after the cutting process.

### **Recommended Applications**

Ideal for heavy commercial environments: Education | Healthcare | Hospitality | Multi-family | Retail | Senior Living | Workplace

**Direct Glue Installation** 



1 ExoGuard<sup>™</sup> Finish Adds resistance to staining and abrasion.

2 Clear 22 mil Wear Layer Protects against premature product aging.

3 High-Resolution Image Creates a stunning visual with depth and detail.

4 Commercial Core Enhances resistance to residual indentation.

**Commercial Backing** Designed with non-skid pattern that can be installed loose lay or direct glue.



### Direct Glue or Loose Lay

The dual purpose backing construction allows for direct glue or loose lay installation for more flexibility to support the needs of the space.



### **Polish-Optional Reduces Cost**

ExoGuard<sup>™</sup> is a polish-optional finish that can reduce the cost of annual maintenance.



### **LEEDv4** Contributions

IEQ – Floorscore IAQ Certification MR – RFCI Industry Average EPD

Installation Methods Ashlar, Brick, Monolithic, and Quarter Turn.

**Recommended Adhesives** Shaw 4100, S150 or Shaw 4151.

Loose Lay Installation



This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.