
SelectEDU


quick ship





ShawContract®

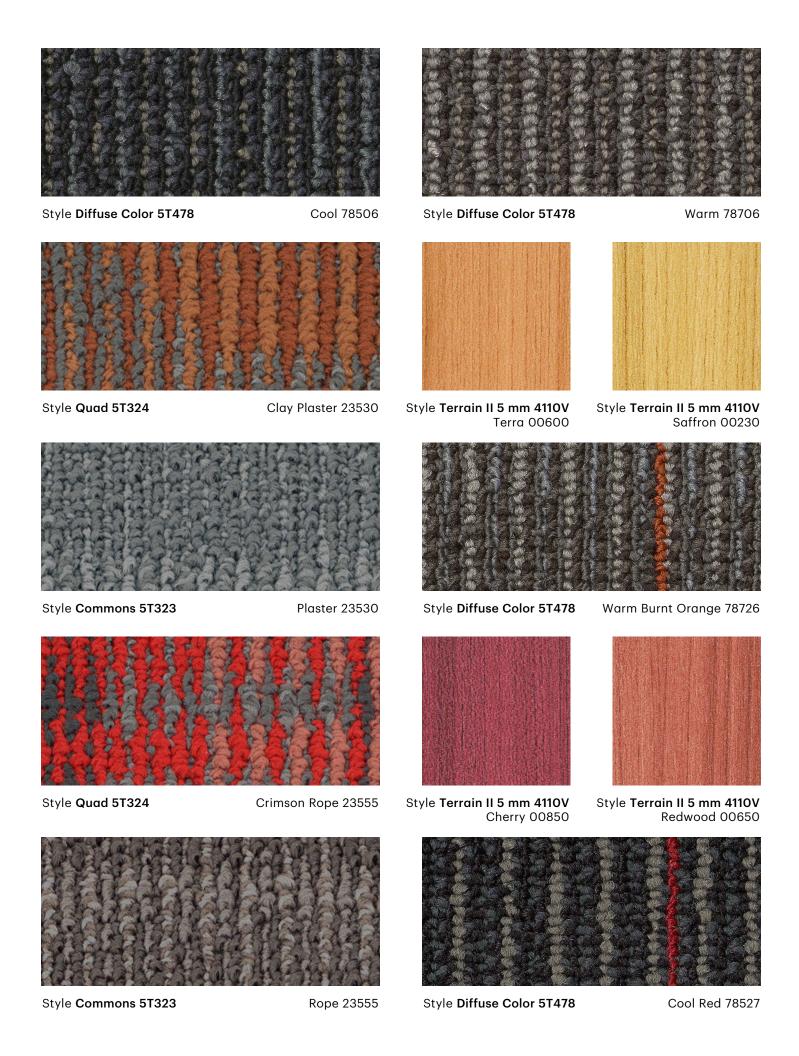

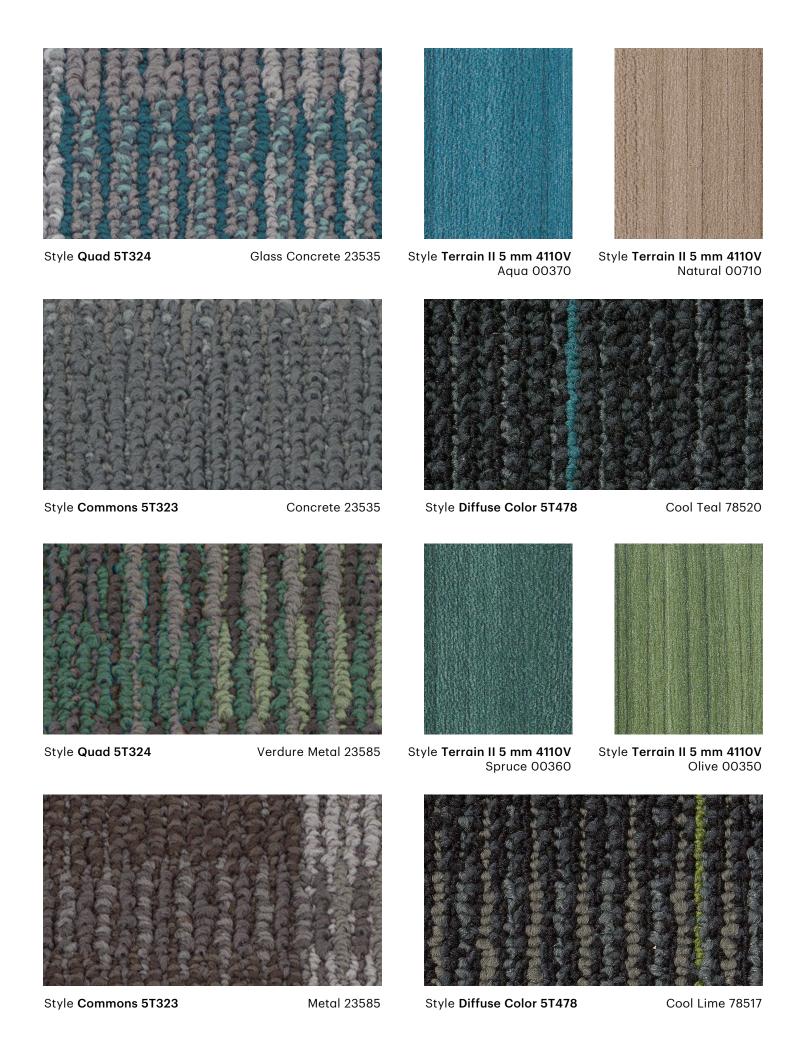











Select**EDU**



Metric Units

542.5 g/m²

Available up to 2,500 sq yds to ship within two weeks or less. **Our Quick Ship program is updated periodically. Please visit shawcontract.com to view our most recent Quick Ship offering.

Specifications

Style Name Style Number Construction Fiber Dye Method

Tufted Weight Gauge Stitches per Inch Finished Pile Thickness **Average Density** Kilotex **Product Size** Area Per Carton **Pieces Per Carton Secondary Backing Protective Treatments Radiant Panel NBS Smoke Electrostatic Propensity**

Cradle to Cradle Certified® Warranty*

Coordinating LVT

Style Name Style Number Construction Finish

Nominal Dimensions Wear Layer Thickness Overall Thickness Warranty*

Commons 5T323

US Units

Multi-level Pattern Loop EcoSolution Q100™ Nylon 100% Solution Dyed

Metric Units 16.0 oz/yd2 542.5 g/m² 1/10 39.4 per 10 cm 10.0 39.0 per 10 cm 0.088 in 2.24 mm 6,545 oz/yd3 0.242 g/cm³ 8 83 24 in × 24 in 61 cm × 61 cm 48 ft² 4.46 m² 12 pcs EcoWorx® Tile SSP® Shaw Soil Protection (ASTM E 648) Class I (ASTM E 662) < 450 Less Than 3.5 kV, Built-in Permanent Conductive Fiber Silver Level (Version 4.0) Lifetime Commercial Limited

Diffuse Color 5T478

US Units

16.0 oz/yd2

Multi-level Pattern Loop EcoSolution Q100™ Nylon 100% Solution Dved

1/12 47.2 per 10 cm 8.5 34.0 per 10 cm 0.092 in 2.34 mm 6,261 oz/yd3 0.232 g/cm³ 9 23 24 in × 24 in 61 cm × 61 cm 48 ft² 4.46 m² 12 pcs EcoWorx® Tile SSP® Shaw Soil Protection (ASTM F 648) Class I (ASTM E 662) < 450 Less Than 3.5 kV, Built-in Permanent Conductive Fiber Silver Level (Version 4.0) Lifetime Commercial Limited

Quad 5T324

Multi-level Pattern Loop EcoSolution Q100™ Nylon 100% Solution Dyed

US Units	Metric Units
16.0 oz/yd ²	542.5 g/m ²
1/10	39.4 per 10 cn
9.5	38.0 per 10 cm
0.093 in	2.36 mm
6,194 oz/yd³	0.229 g/cm ³
	8.68
24 in × 24 in	61 cm × 61 cm
48 ft ²	4.46 m ²
12 pcs	
EcoWorx® Tile	
SSP® Shaw Soil Protection	
(ASTM E 648) Class I	
(ASTM E 662) < 450	
Less Than 3.5 kV, Built-in	
Permanent Conductive Fiber	
Silver Level (Version 4.0)	
Lifetime Commercial Limited	

Recommended Installation Methods











ExoGuard+® **US Units**

Terrain II 20 Mil 5 mm

4110V

Metric Units 15 cm × 122 cm 6 in × 48 in 0.02 in 20 mil (0.51 mm) 0.197 in 5.0 mm

15 Year Commercial Limited Commercial Limited Underbed Monolithic Quarter Turn







Stagger Herringbone Ashlar Brick

information on recycled content visit shawcontract.com.

*For detailed warranty and the most accurate

This carpet is manufactured and sold for floor covering use only. Chair pads are recommended under office chairs with roller casters in order to protect appearance retention and to avoid premature wear. Walk off titles are recommended at building entrances. As with all carpets, colors are subject to day lot variations. Shading is the result of pile distortion and often is described as "watermarking". This does not constitute a manufacturing defect. To meet warranty requirements, approved adhesives and seam sealers must be used for jule-down application, consult shawwoontract.com for more information. This carpet is on exclusive design and may not be duplicated in any manner. Use of this design in the creation of another carpet design is also strictly prohibited. Specifications are subject to nominal manufacturing variances may necessitate specification changes without notice. Visit shawcontract.com fig for more information.

Heavy Commercial Luxury Vinyl Tile With Fiberglass