



Vitality

ShawContract®



Wellness From The Ground Up

Whether your space is an operating room, a laboratory or a patient room, Vitality **homogeneous sheet** can connect the purpose of your space with the solutions you need. With the *Vitality Collection*, color and performance can become the foundation of your design. Clean, semi-solid colors and the **restorative principles of biophilic design** inform this collection and help connect and direct your healing spaces with the hues found in nature. *Vitality* in its truest sense is about being strong and active—within ourselves and within the spaces that heal us.

Depend on the durability, stain resistance and easy maintenance procedures to keep your spaces operational and functional. *Vitality*, *Vitality Hues* and *Vitality Tones* feature a **wide range of 72 colors** to fit any environment whether it be for a renovation or new construction.



Vitality Tones - Terrazzo-style design with a unique palette of 12 core colors, available at an affordable price point. Aseptic environments meet their stylish match.



Vitality Hues - Choose from a vast range of 30+ colors in a design that gives spaces a clean, high-end look—especially for wayfinding and accents.

VITALITY HUES (4376V HOMOGENEOUS SHEET) IN EXCEL (00330), SPIRIT (00323), PIZAZZ (00327) + DREAM (00415)

Key Benefits



Durability in Demanding Environments

ExoGuard™ finish adds resistance to staining and abrasion.



15-year Warranty

Covers manufacturing defects, wear, and top down moisture.



Static + Rolling Loads

Vitality performs in environments with heavy static and heavy rolling loads per ASTM test methods.



Resistance to Medical Stains

Vitality provides improved resistance to common medical stains including betadine, iodine, blood and hand sanitizer.



Underbed Warranty

LokWorx+ Resilient, 4151, and S150 adhesives create a bond between the floor and the substrate that protects against potential movement issues allowing for use in extreme environments like heavy rolling and static loads.



Polish-Optional Reduces Cost

ExoGuard™ is a polish-optional finish that can reduce the cost of annual maintenance.

Cleanliness From The Inside Out

As a homogeneous sheet, the **throughbody construction** is ideal for high-impact areas like the operating room where nicks and cuts from fallen scalpels become undetectable. Easily spot critical instruments before and after procedures on the **clean, semi-solid visuals**.

Vitality is ideal for infection control. In aseptic environments, we know cleanliness is top of mind. The *Vitality* **homogeneous sheet collection** is ideal for these demanding environments from its construction to its installation methods.



Coordinating Weld Rods

Weld rods are available for all colors of *Vitality*, *Vitality Hues* and *Vitality Tones*. When heat welded properly they create superior seam integrity that prevents seam separation and prevents liquids from permeating to the floor below.



Resistant to Mold

Vinyl inherently does not support the growth of microbes, mold, bacteria or mildew.



Flash Cove

The non-directional visual allows for flash coving up the wall in acute care environments creating easy to clean edges and corners in the environments where clean really matters.



Color Creates Composition

Use the wide range of colors together to create dynamic installations and bright features that highlight the function of any space or opt for a more subtle approach when the environment calls for it.




Analogous Color

These colors are naturally complementary. Next to each other on the color wheel these like-minded colors can create simple, coordinated palettes with ease.



Color Gradients

Purposeful steps in color build depth into the color line, allowing you to separate spaces with subtlety while still creating wayfinding and zoning.

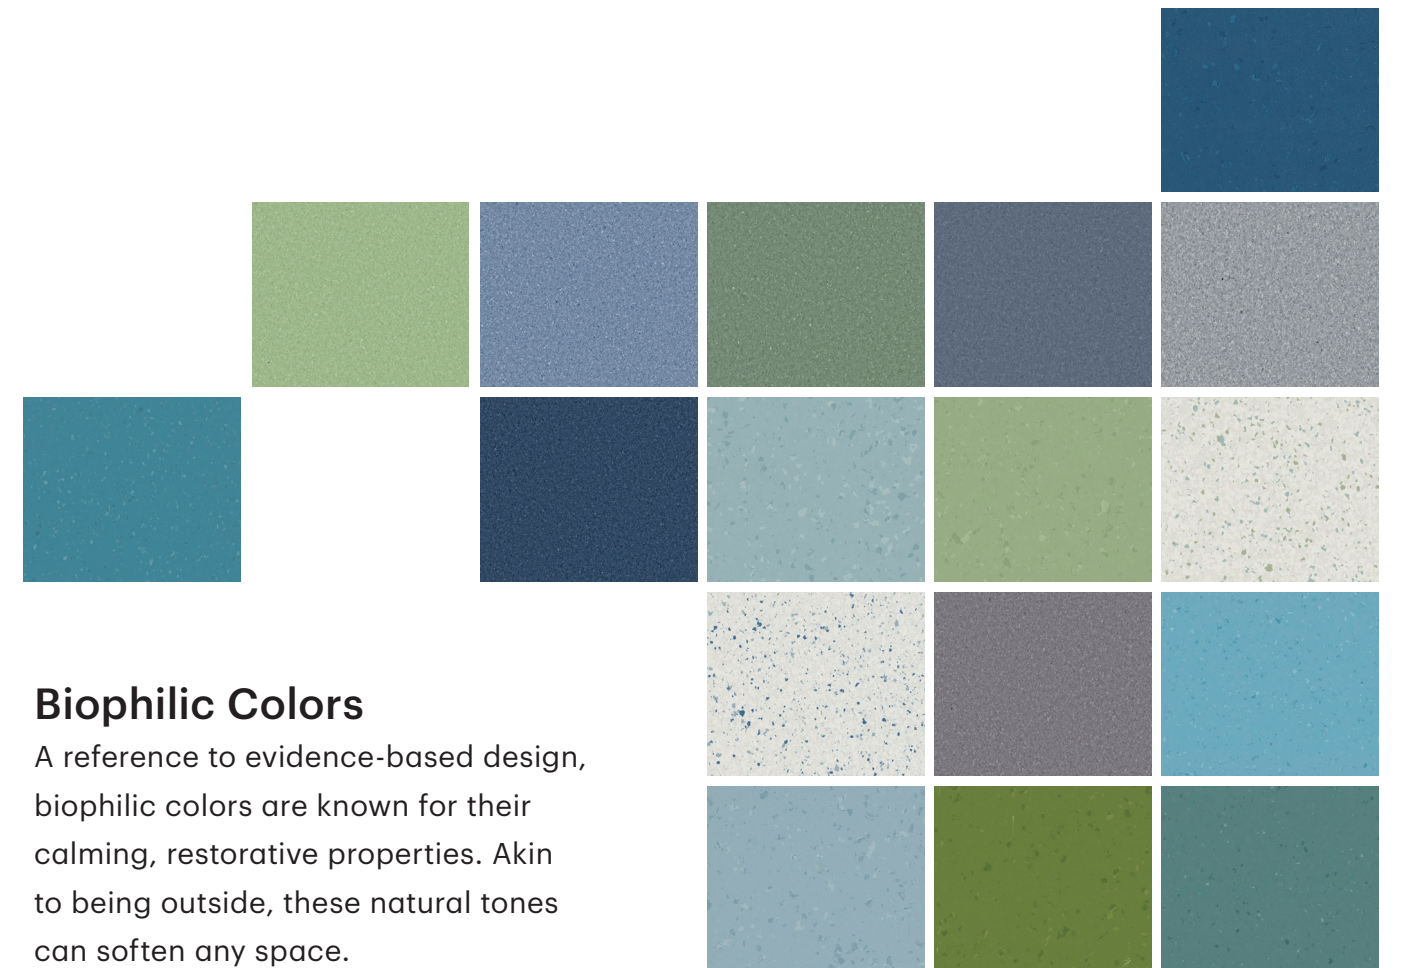

Biophilic Colors

A reference to evidence-based design, biophilic colors are known for their calming, restorative properties. Akin to being outside, these natural tones can soften any space.



VITALITY (0873V HOMOGENEOUS SHEET) IN UPLIFT (73120)

Adhesive Options

	Shaw's S150 (Quickest Adhesive for Occupancy)	Shaw's 4151	LokWorx+ Resilient	Competitor 2-Part Epoxy
Product Attributes	Quick-dry, one step spray adhesive	Full spread, one step adhesive	Full spread, one step adhesive	Two part, full spread adhesive
Flash Time Requirements	Porous Substrates - 10 minutes Non-Porous Substrates - 30 minutes	Porous Substrates - 10 minutes Non-Porous Substrates - 30 minutes	Porous Substrates - 10 minutes Non-Porous Substrates - 30 minutes	Porous Substrates - Not Applicable Non-Porous Substrates - 30 minutes
Roller Weight Requirement	100 lbs roller - Immediately roll after installation is complete	100 lbs roller - Immediately roll after installation is complete	100 lbs roller - Immediately roll after installation is complete	100 lbs roller - Immediately roll after installation is complete, wait 1-2 hours and roll again. Low grab of adhesive may require more than 2 passes to ensure full adhesion
Wait Time Before Heat Weld	1 hour	24 hours	12 hours	24 hours or until fully cured
Wait Time Before Light Traffic	12 hours	24 hours	12 hours	72 hours
Wait Time Before Rolling Loads	24 hours	72 hours	24 hours	72 hours

All substrates shall be dry, clean and structurally sound. All installations are subject to temperature and humidity. Flooring material and adhesive must be acclimated to the installation area for a minimum of 48 hours prior to installation. Visit shawcontract.com for installation instructions.



At the heart of Shaw Contract we create products and solutions that positively impact people and the planet. We are Design Optimists.

Sustainability is what unites us. It is our foundation and our purpose: our equal rights, our shared experience, our hopeful future. It is the air we breathe and the earth we stand upon.


Material Health

We design and manufacture products to optimize human environments.



Vitality LEEDv4 Contribution

IEQ—FloorScore® IAQ Certification.
Low VOC emissions.



Ortho Phthalates-Free

Free of ortho phthalates.



FloorScore® IAQ Certified

This product is third party certified for low VOC emissions, contributing to valuable IEQ points for LEEDv4 credits.

Carbon Impact

We are a positive force in the global effort to collectively fight climate change.



Measurable Product Impact

Vitality Tones and Vitality Hues have an Industry-Averaged 3rd party certified EPD.



50% Reduced Carbon Footprint

As a result of Shaw Industries' investments to help reduce our energy and greenhouse gas impact, we have cut our Scope 1 & 2 emissions by more than half since our 2010 baseline.

Circular Economy

We practice a regenerative, closed-loop approach to sustainability.



Recyclable

On average, Vitality Tones, and Vitality Hues contain up to 20% pre-consumer recycled content.

Diversity, Equity & Inclusion

We nurture an environment where every voice and perspective can be heard, with equal value placed on seen and unseen experiences.



Supplier Diversity Program

More than 42% of Shaw Industries' spend* is with small and diverse suppliers. We want to promote supplier participation that is reflective of Shaw's diverse customer base and local communities, bringing more innovation and opening new markets for growth.

*Based on spend categories where we have domestic (US) small or diverse suppliers who are capable of meeting our needs.

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.


ShawContract®

Vitality




ShawContract®

Style Vitality Tones 4375V

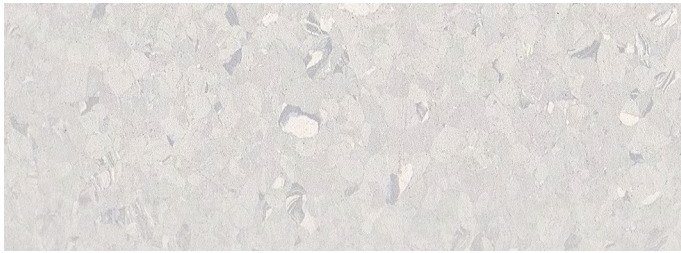

WEL120 T

Sing 00120

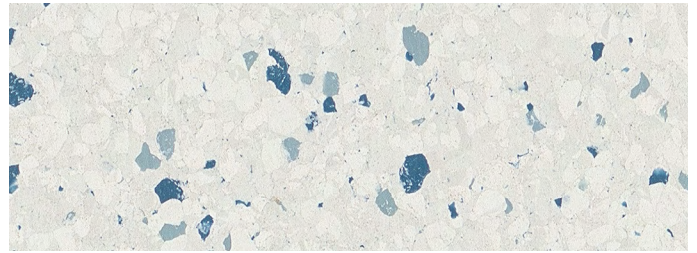


WEL485

Amp Up 00485



WEL100 T

Root 00100

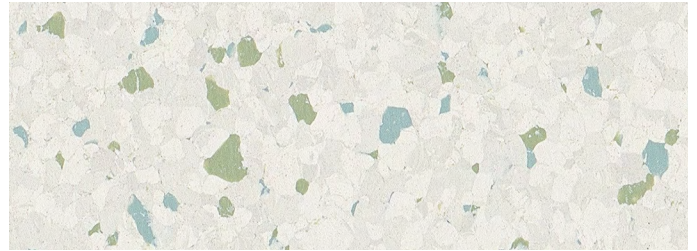

WEL515 T

Jazz Up 00515



WEL105 T

Cheer 00105



WEL111 T

Pep Up 00111



WEL130 T

Humor 00130




WEL163

Play 00163



WEL144 T

Ginger 00144

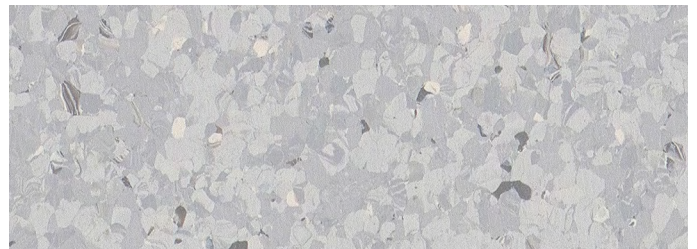

WEL104 T

Brawn 00104



WEL240


Mettle 00240



WEL520 T

Might 00520

Style Vitality Hues 4376V

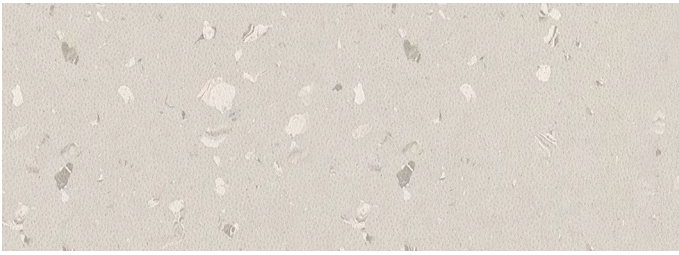

WEL114

Dash 00114



WEL111 H

Uphold 00111



WEL120 H

Drive 00120



WEL105 H

Produce 00105



WEL144

Spright 00144



WEL121

Excite 00121




WEL110

Animate 00110




WEL130 H

Nurture 00130

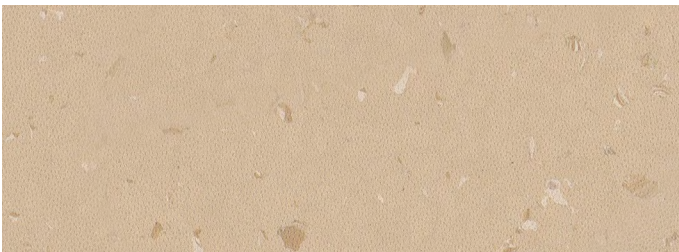

WEL700

Sparkle 00700

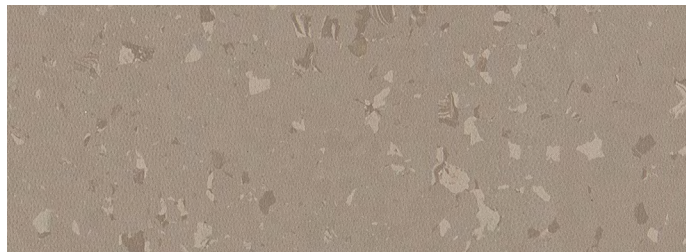


WEL155

Prevail 00155



WEL750

Vim 00750

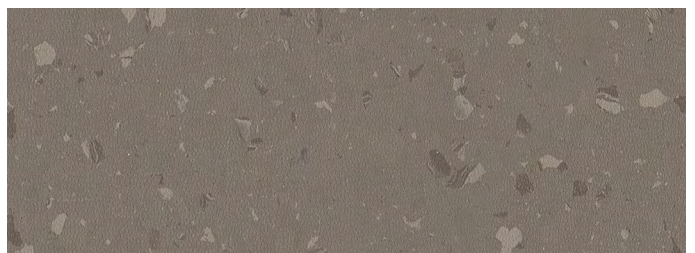

WEL761

Goodness 00761

Style Vitality Hues 4376V




WEL330

Excel 00330




WEL100 H

Replenish 00100

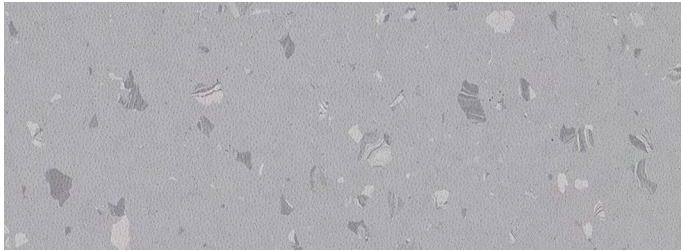


WEL515 H

Sustain 00515

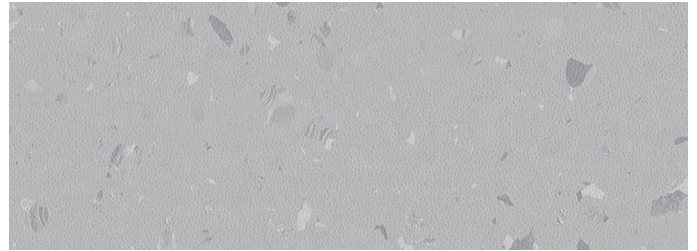


WEL104 H

Share 00104

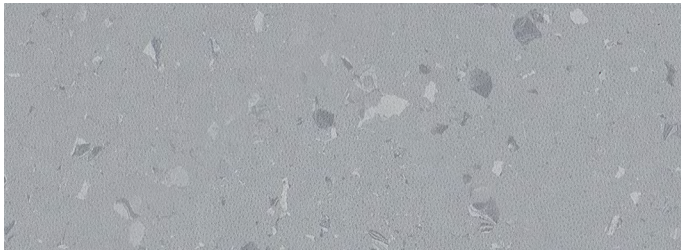

WEL520 H

Foster 00520

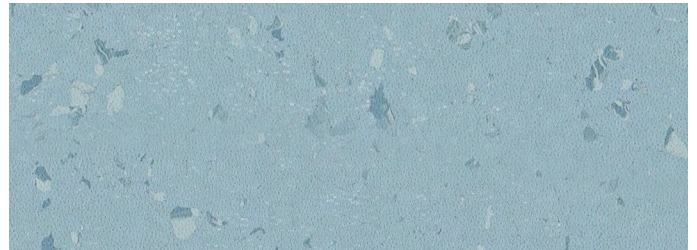


WEL405

Gusto 00405




WEL535

Encourage 00535

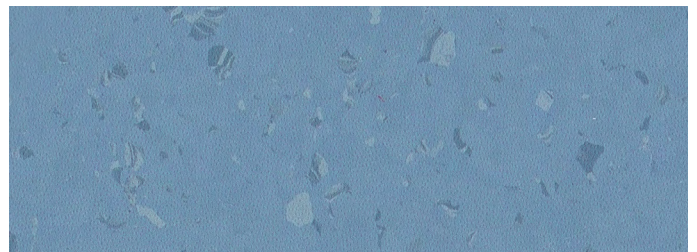


WEL411

Moxie 00411

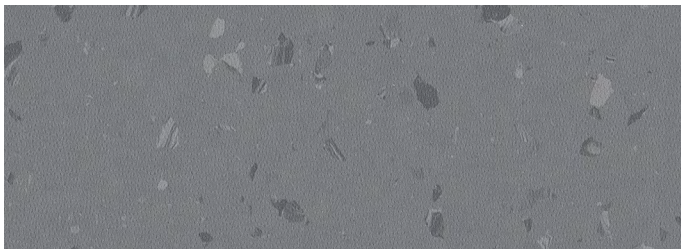


WEL518

Prosper 00518

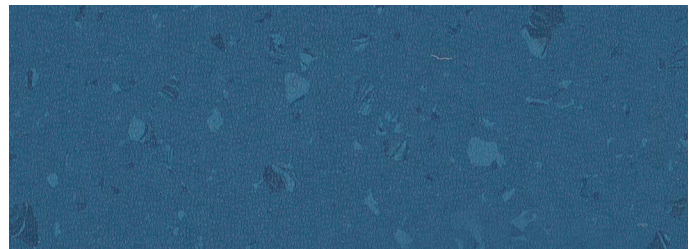

WEL490

Exuberance 00490

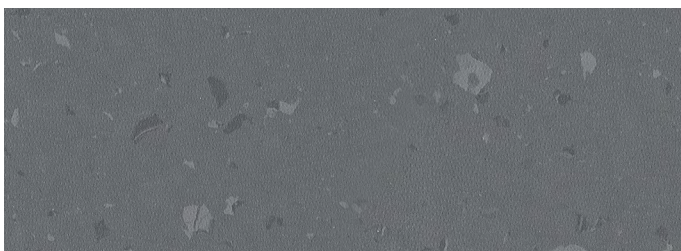

WEL560


Champion 00560



WEL496

Assist 00496

Style Vitality Hues 4376V

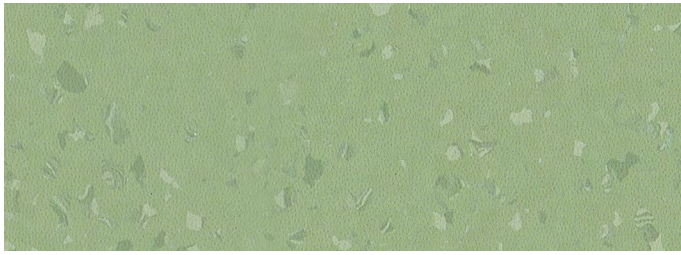


WEL325

Vigor 00325




WEL211

Zing 00211

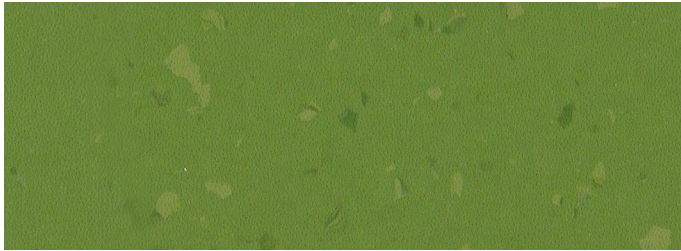


WEL326

Verve 00326

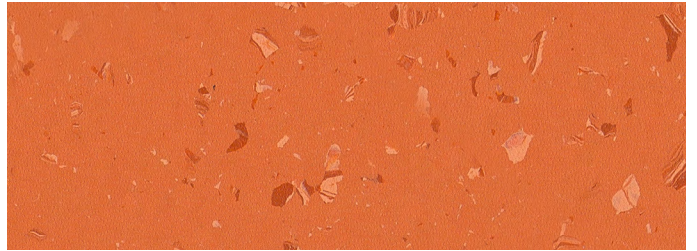


WEL675

Fervor 00675

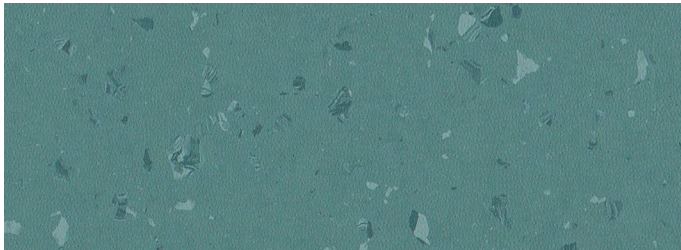

WEL350

Ease 00350

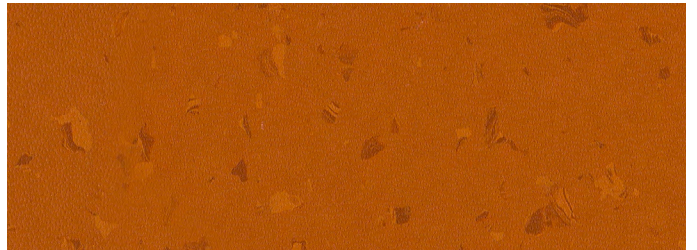


WEL668

Fire 00668




WEL415

Dream 00415

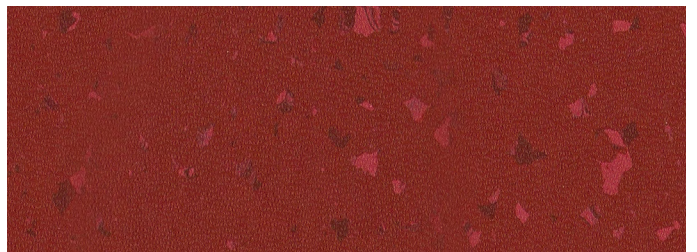

WEL865

Power 00865

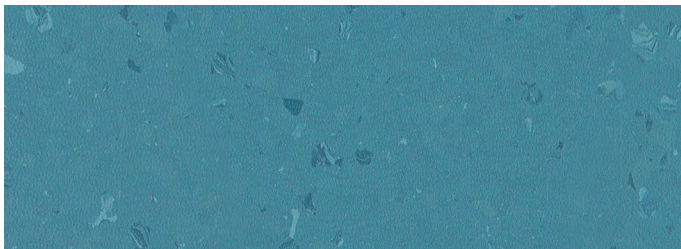


WEL323

Spirit 00323



WEL991

Passion 00991

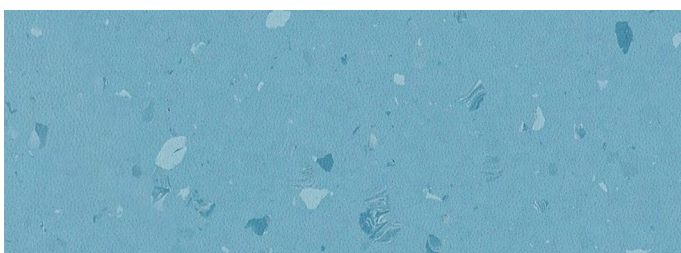

WEL327

Pizazz 00327



WEL860

Pride 00860

Style Vitality 0873V



WEL5206

Delight 73110




WEL5201

Rejuvenate 73100



WEL5226

Uplift 73120

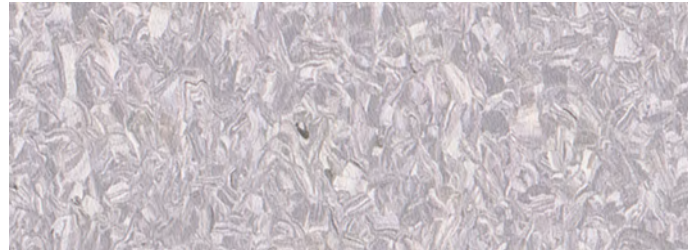

WEL5203

Excite 73515



WEL5228

Comfort 73755




WEL5238

Invigorate 73535



WEL5244

Balance 73761

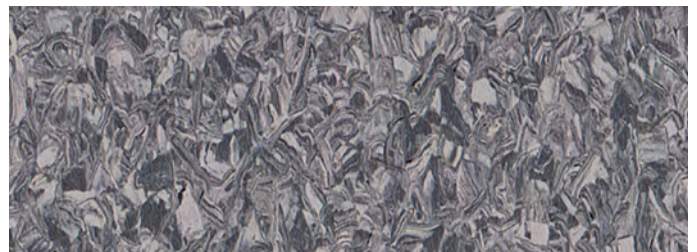


WEL5225

Strength 73530




WEL5243

Thrive 73700

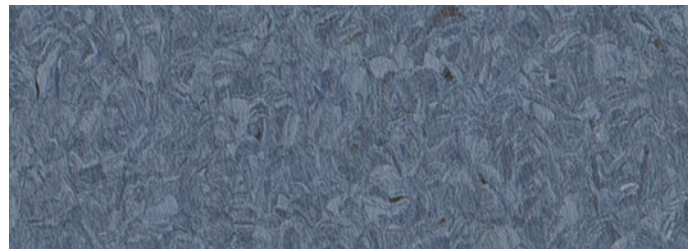


WEL5239

Soothe 73447

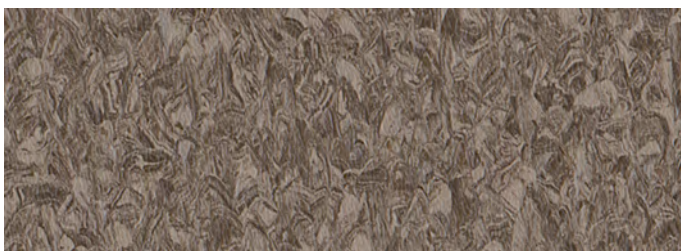

WEL5230


Abundance 73740

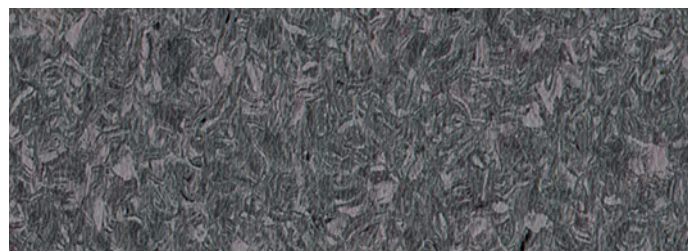

WEL5205

Elevate 73505

Style Vitality 0873V

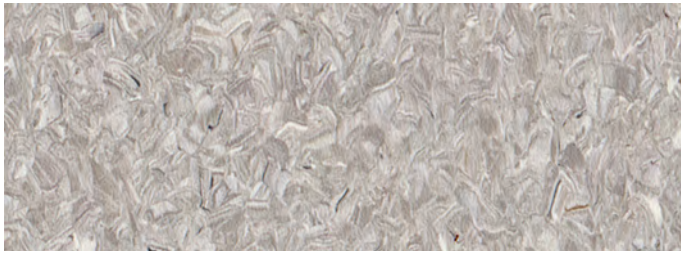


WEL5202

Inspire 73104



WEL5237

Heal 73144

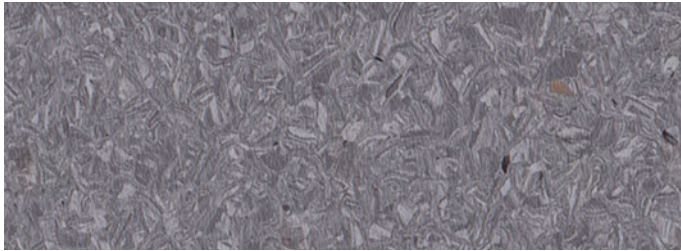

WEL5204

Restore 73518



WEL5207

Radiate 73112




WEL5242

Flourish 73325



WEL5209

Warmth 73155

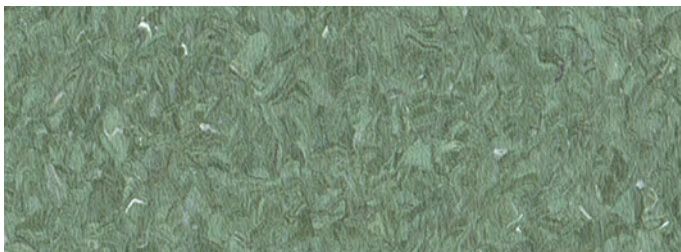

WEL5245

Nourish 73370



WEL5241

Zest 73201




WEL5232

Benefit 73415




WEL5219

Energy 73675

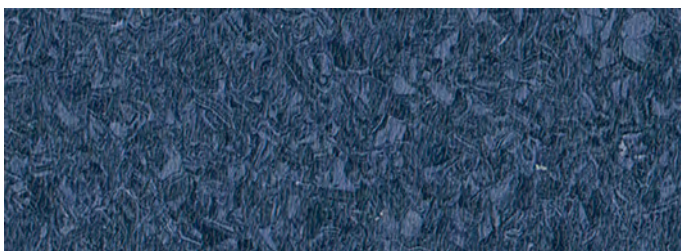

WEL5240

Exhilarate 73485

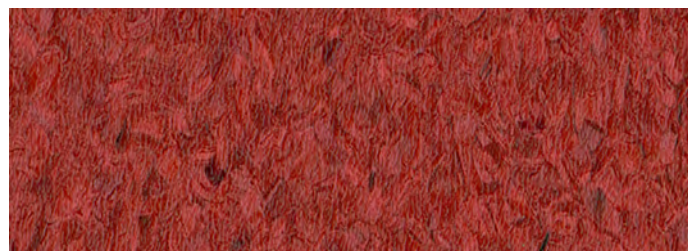

WEL5220

Robust 73855



Vitality



Vitality Hues



Vitality Tones

Vitality

Specifications

Style Name	Vitality
Style Number	0873V
Welding Rod Style Number	236VS
Construction	Commercial Homogeneous Sheet
Finish	ExoGuard™
Class	Tested to ASTM F1913
Installation	Direct Glue
Recommended Adhesive	4151, S150, LokWorx+ Resilient and LokWorx Resilient

Vitality Hues
4376V
184CA
Commercial Homogeneous Sheet
ExoGuard™
Tested to ASTM F1913
Direct Glue
4151, S150, LokWorx+ Resilient and LokWorx Resilient

Vitality Tones
4375V
184CA
Commercial Homogeneous Sheet
ExoGuard™
Tested to ASTM F1913
Direct Glue
4151, S150, LokWorx+ Resilient and LokWorx Resilient

	US Units	Metric Units
Nominal Dimensions	6.5 ft x 65.5 ft	2 m x 20 m
Overall Thickness	0.079 in	2.0 mm
Actual Width	6.58 ft	2.01 m
Actual Length	65.94 ft	20.10 m
Static Load	(ASTM F970) Passes, Modified 2000 PSI	
Residual Indentation	(ASTM F1914) Passes	
Flexibility	(ASTM F137) Passes	
Resistance to Heat	(ASTM F1514) Passes	
Resistance to Light	(ASTM F1515) Passes	
Resistance to Chemicals	(ASTM F925) Passes	
Radiant Panel	(ASTM 648) Class 1	
NBS Smoke	(ASTM E662) < 450	
Warranty*	15 Year Commercial Limited Commercial Limited Underbed	

US Units	Metric Units
6.5 ft x 65.5 ft	2 m x 20 m
0.079 in	2.0 mm
6.56 ft	2.0 m
65.62 ft	20.0 m
(ASTM F970) Passes, Modified 2000 PSI	
(ASTM F1914) Passes	
(ASTM F137) Passes	
(ASTM F1514) Passes	
(ASTM F1515) Passes	
(ASTM F925) Passes	
(ASTM 648) Class 1	
(ASTM E662) < 450	
15 Year Commercial Limited Commercial Limited Underbed	

US Units	Metric Units
6.5 ft x 65.5 ft	2 m x 20 m
0.079 in	2.0 mm
6.56 ft	2.0 m
65.62 ft	20.0 m
(ASTM F970) Passes, Modified 2000 PSI	
(ASTM F1914) Passes	
(ASTM F137) Passes	
(ASTM F1514) Passes	
(ASTM F1515) Passes	
(ASTM F925) Passes	
(ASTM 648) Class 1	
(ASTM E662) < 450	
15 Year Commercial Limited Commercial Limited Underbed	

*For detailed warranty information visit shawcontract.com.

Recommended Installation Methods



Reverse

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.