



StaticSmart®

## Office Smart™ Static Control

Designed for high traffic/high use networked environments to minimize nuisance static and to provide additional protection against static damage.

### Antistatic – General Office Use

- kV rating < 2.0kV | not grounded | conductive, 15% coverage
- Waiting rooms, conference rooms, offices, lobbies, common areas
- Uses Continuous Conductive StaticSmart™ Monofilaments
- No grounding installation accessories or procedures are required
- Shaw 5000 Carpet Tile Adhesive is recommended

### Additional Benefits

- Cradle to Cradle Certified® Silver
- Low Embodied Carbon | Carbon Neutral
- 58% Recycled Content
- Qualifies for re[TURN]®

## Daily Planner | Office Smart™

Tile Size | 24x24



### Product Specifications

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	16 oz   542.49 g/m <sup>2</sup>
<b>Gauge</b>	1/12   47.2/10 cm
<b>Average Density</b>	5035 oz/yd <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   61 cm x 61 cm
<b>Secondary Backing</b>	EcoWorx®
<b>Recommended installation</b>	Monolithic, Quarter Turn, Random, Ashlar, Brick

Morning Meeting




Morning Meeting




Closing Time




Rise & Shine



Month End



End of Day



Coffee Break

**Matching Carpet Tile**  
Tangle Tile\*

\*Product does not contain Fibersmart™ Technology.




Brainstorm

**Matching Carpet Tile**  
Tempt Tile\*

\*Product does not contain Fibersmart™ Technology.

**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	16 oz   542.5 g/m <sup>2</sup>
<b>Gauge</b>	1/12   47.2/10 cm
<b>Average Density</b>	4923 oz/yd <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   61 cm x 61 cm
<b>Secondary Backing</b>	EcoWorx®
<b>Recommended installation</b>	Monolithic, Quarter Turn, Random, Ashlar, Brick

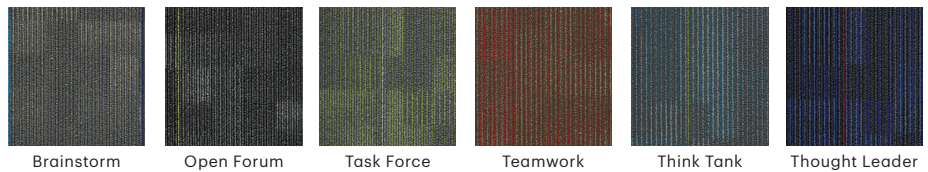

Brainstorm    Open Forum    Task Force    Teamwork    Think Tank    Thought Leader




On the Road

**Matching Carpet Tile**  
Embark Tile\*

\*Product does not contain Fibersmart™ Technology.

**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	98% Solution Dyed / 2% Yarn Dyed
<b>Tufted Weight</b>	17 oz   576.4 g/m <sup>2</sup>
<b>Gauge</b>	1/12   47.2/10 cm
<b>Average Density</b>	5829 oz/yd <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   61 cm x 61 cm
<b>Secondary Backing</b>	EcoWorx®
<b>Recommended installation</b>	Monolithic, Quarter Turn, Ashlar, Brick

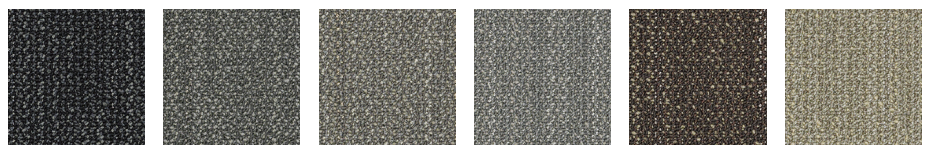

High Rise    Home Office    Corner Office    On The Road    Coffee Shop    Downtown

## StaticSmart® SD Carpet Tile

Designed with maximum static protection for electronics manufacturing environments and anywhere where 24/7 operational readiness, public safety, and security are at stake.

### Mission Critical Environments

- kV rating < 0.4kV | grounded | conductive, 100% coverage
- Electrical Resistance 1.0 x 10<sup>6</sup> to 10<sup>9</sup> ohms
- Public safety / e-9-1-1 / emergency operations, air traffic control, and electronics manufacturing / R&D
- Contains continuous conductive StaticSmart Fibrelink™ Monofilament in every tuft
- These products may be installed over concrete or raised access flooring systems
- Grounding accessories and StaticSmart ESDvantage adhesive is required

### Additional Benefits

- Cradle to Cradle Certified® Silver
- TARR Heavy Duty 3.0+
- Low Embodied Carbon | Carbon Neutral
- 59–61% Recycled Content
- Qualifies for re[TURN]®

## Presidential | SD Carpet Tile

Tile Size | 24x24



### Product Specifications

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Conductive Fibre Technology</b>	Continuous Conductive StaticSmart Fibrelink™ Monofilament in Every Tuft
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	22 oz   746 g/m <sup>2</sup>
<b>Gauge</b>	1/10   39.4/10 cm
<b>Average Density</b>	6754 oz/yd <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   61 cm x 61 cm
<b>Secondary Backing</b>	Conductive EcoWorx® Tile
<b>Recommended installation</b>	Quarter Turn, Ashlar



Roosevelt


Adams

Roosevelt

Washington


**Coordinating Tile**  
Reparte Tile\*

\*Product does not contain conductive properties.

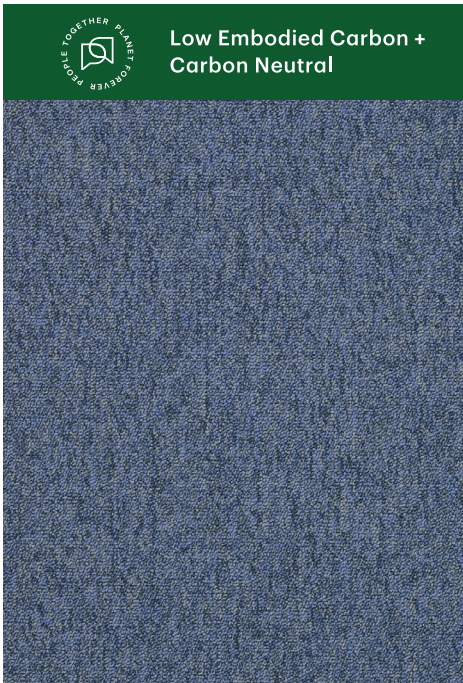

**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Conductive Fibre Technology</b>	Continuous Conductive StaticSmart Fibrelink™
<b>Dye Method</b>	Monofilament in Every Tuft
<b>Tufted Weight</b>	100% Solution Dyed
<b>Gauge</b>	24 oz   813.7 g/m <sup>2</sup>
<b>Average Density</b>	1/10   39.4/10 cm
<b>Product Size</b>	7642 oz/yd <sup>3</sup>
<b>Secondary Backing</b>	24 in x 24 in   61 cm x 61 cm
<b>Recommended installation</b>	Conductive EcoWorx® Tile
	Monolithic

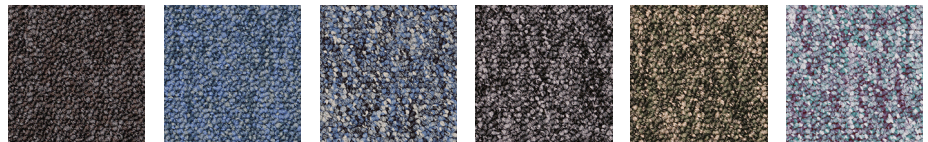

Columbus Blue

Crockett

Columbus Blue

Livingstone

Shackleton Grey

Galileo

Magellan

**Coordinating Products**


Peto II 26 Tile\*

\*Product does not contain conductive properties.



**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	15 oz/yd <sup>2</sup>   508.6 g/m <sup>2</sup>
<b>Gauge</b>	1/12 in   47.2/10 cm
<b>Average Density</b>	4500 oz/yd <sup>3</sup>   0.167 g/cm <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   61 cm x 61 cm
<b>Secondary Backing</b>	Conductive EcoWorx® Tile
<b>Recommended installation</b>	Monolithic, Quarter Turn, Brick, Ashlar

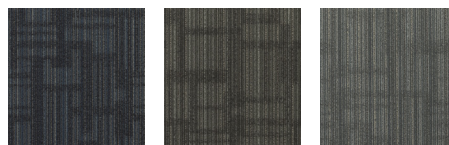

Wigglesworth

Wigglesworth

Wheatley

Penn




Milton

**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	18 oz/yd <sup>2</sup>   610.3 g/m <sup>2</sup>
<b>Gauge</b>	1/10 in   39.37/10 cm
<b>Average Density</b>	5586 oz/yd <sup>3</sup>   0.21 g/cm <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   60.96 cm x 60.96 cm
<b>Secondary Backing</b>	Conductive EcoWorx® Tile
<b>Recommended installation</b>	Monolithic, Quarter Turn, Brick, Ashlar, Random



Milton

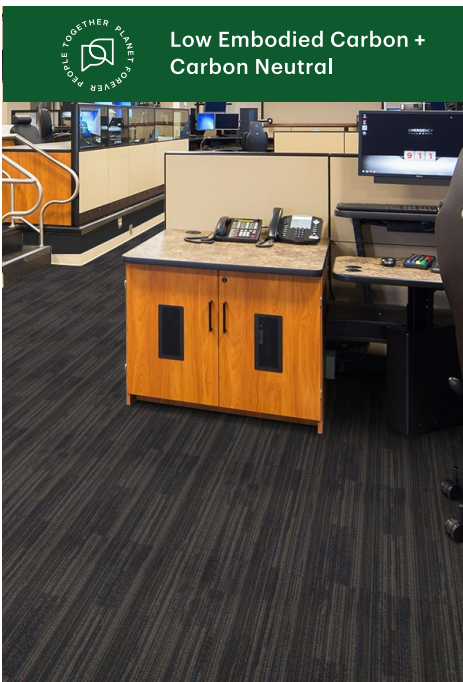


Salt Lake

**Product Specifications**

<b>Fibre</b>	EcoSolution Q100™ Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Weight</b>	17 oz/yd <sup>2</sup>   576.4 g/m <sup>2</sup>
<b>Gauge</b>	1/12 in   47.2/10 cm
<b>Average Density</b>	5058 oz/yd <sup>3</sup>   0.19 g/cm <sup>3</sup>
<b>Product Size</b>	24 in x 24 in   60.96 cm x 60.96 cm
<b>Secondary Backing</b>	Conductive EcoWorx® Tile
<b>Recommended installation</b>	Monolithic, Quarter Turn, Brick, Ashlar



Salt Lake



Niagara

