


ULTRALOC MB®

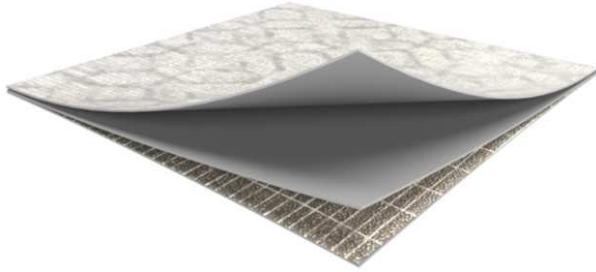

Direct application of high-strength enriched polymer to back of carpet face.

Light coat of high-strength enriched polymer to woven secondary backing.

Layers are joined at compression roller.

features / benefits	High strength enriched polymer precoat and secondary coat laminated to a woven polypropylene secondary backing. Superior Tuftbind and Delamination Breathable Backing Passes British Spill Test
primary	Synthetic
backing thickness	.146 " - .208 "
width	12 feet (standard); optional widths available
testing	Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) When paired with the appropriate ULTRALOC MB products, results typically range from 53 -91, depending on subfloor assembly and ULTRALOC MB products. For specific results, please contact your account manager. See specific product specifications for available testing.
environmental	See specific product specifications for environmental information / certifications.
installation	Direct Glue, Stretch-In (not to exceed 30' x 30'), Double Glue Shaw 1000,*1036, 1200, 3800 *AATCC174 Seam Sealer 4000, 8300.
warranty	Broadloom Lifetime Commercial Limited Warranty with Moisture Broadloom Lifetime Commercial Limited Warranty with Moisture with Stain and Color