



[totalworx]

CATALOGUE

ShawContract®

[totalworx]™



[totalworx]™

A complete line of accessories designed to make installation and care easy.

OUR MISSION

simplicity | service | satisfaction

prepworx™

Floor Prep Products

groundworx™

Cushion + Underlayment

lokworx®


Seam Tape + Adhesives + Tack Strips

finishworx™

Trims + Wall Base + Stair Treads

careworx™

Cleaners + Disinfectants

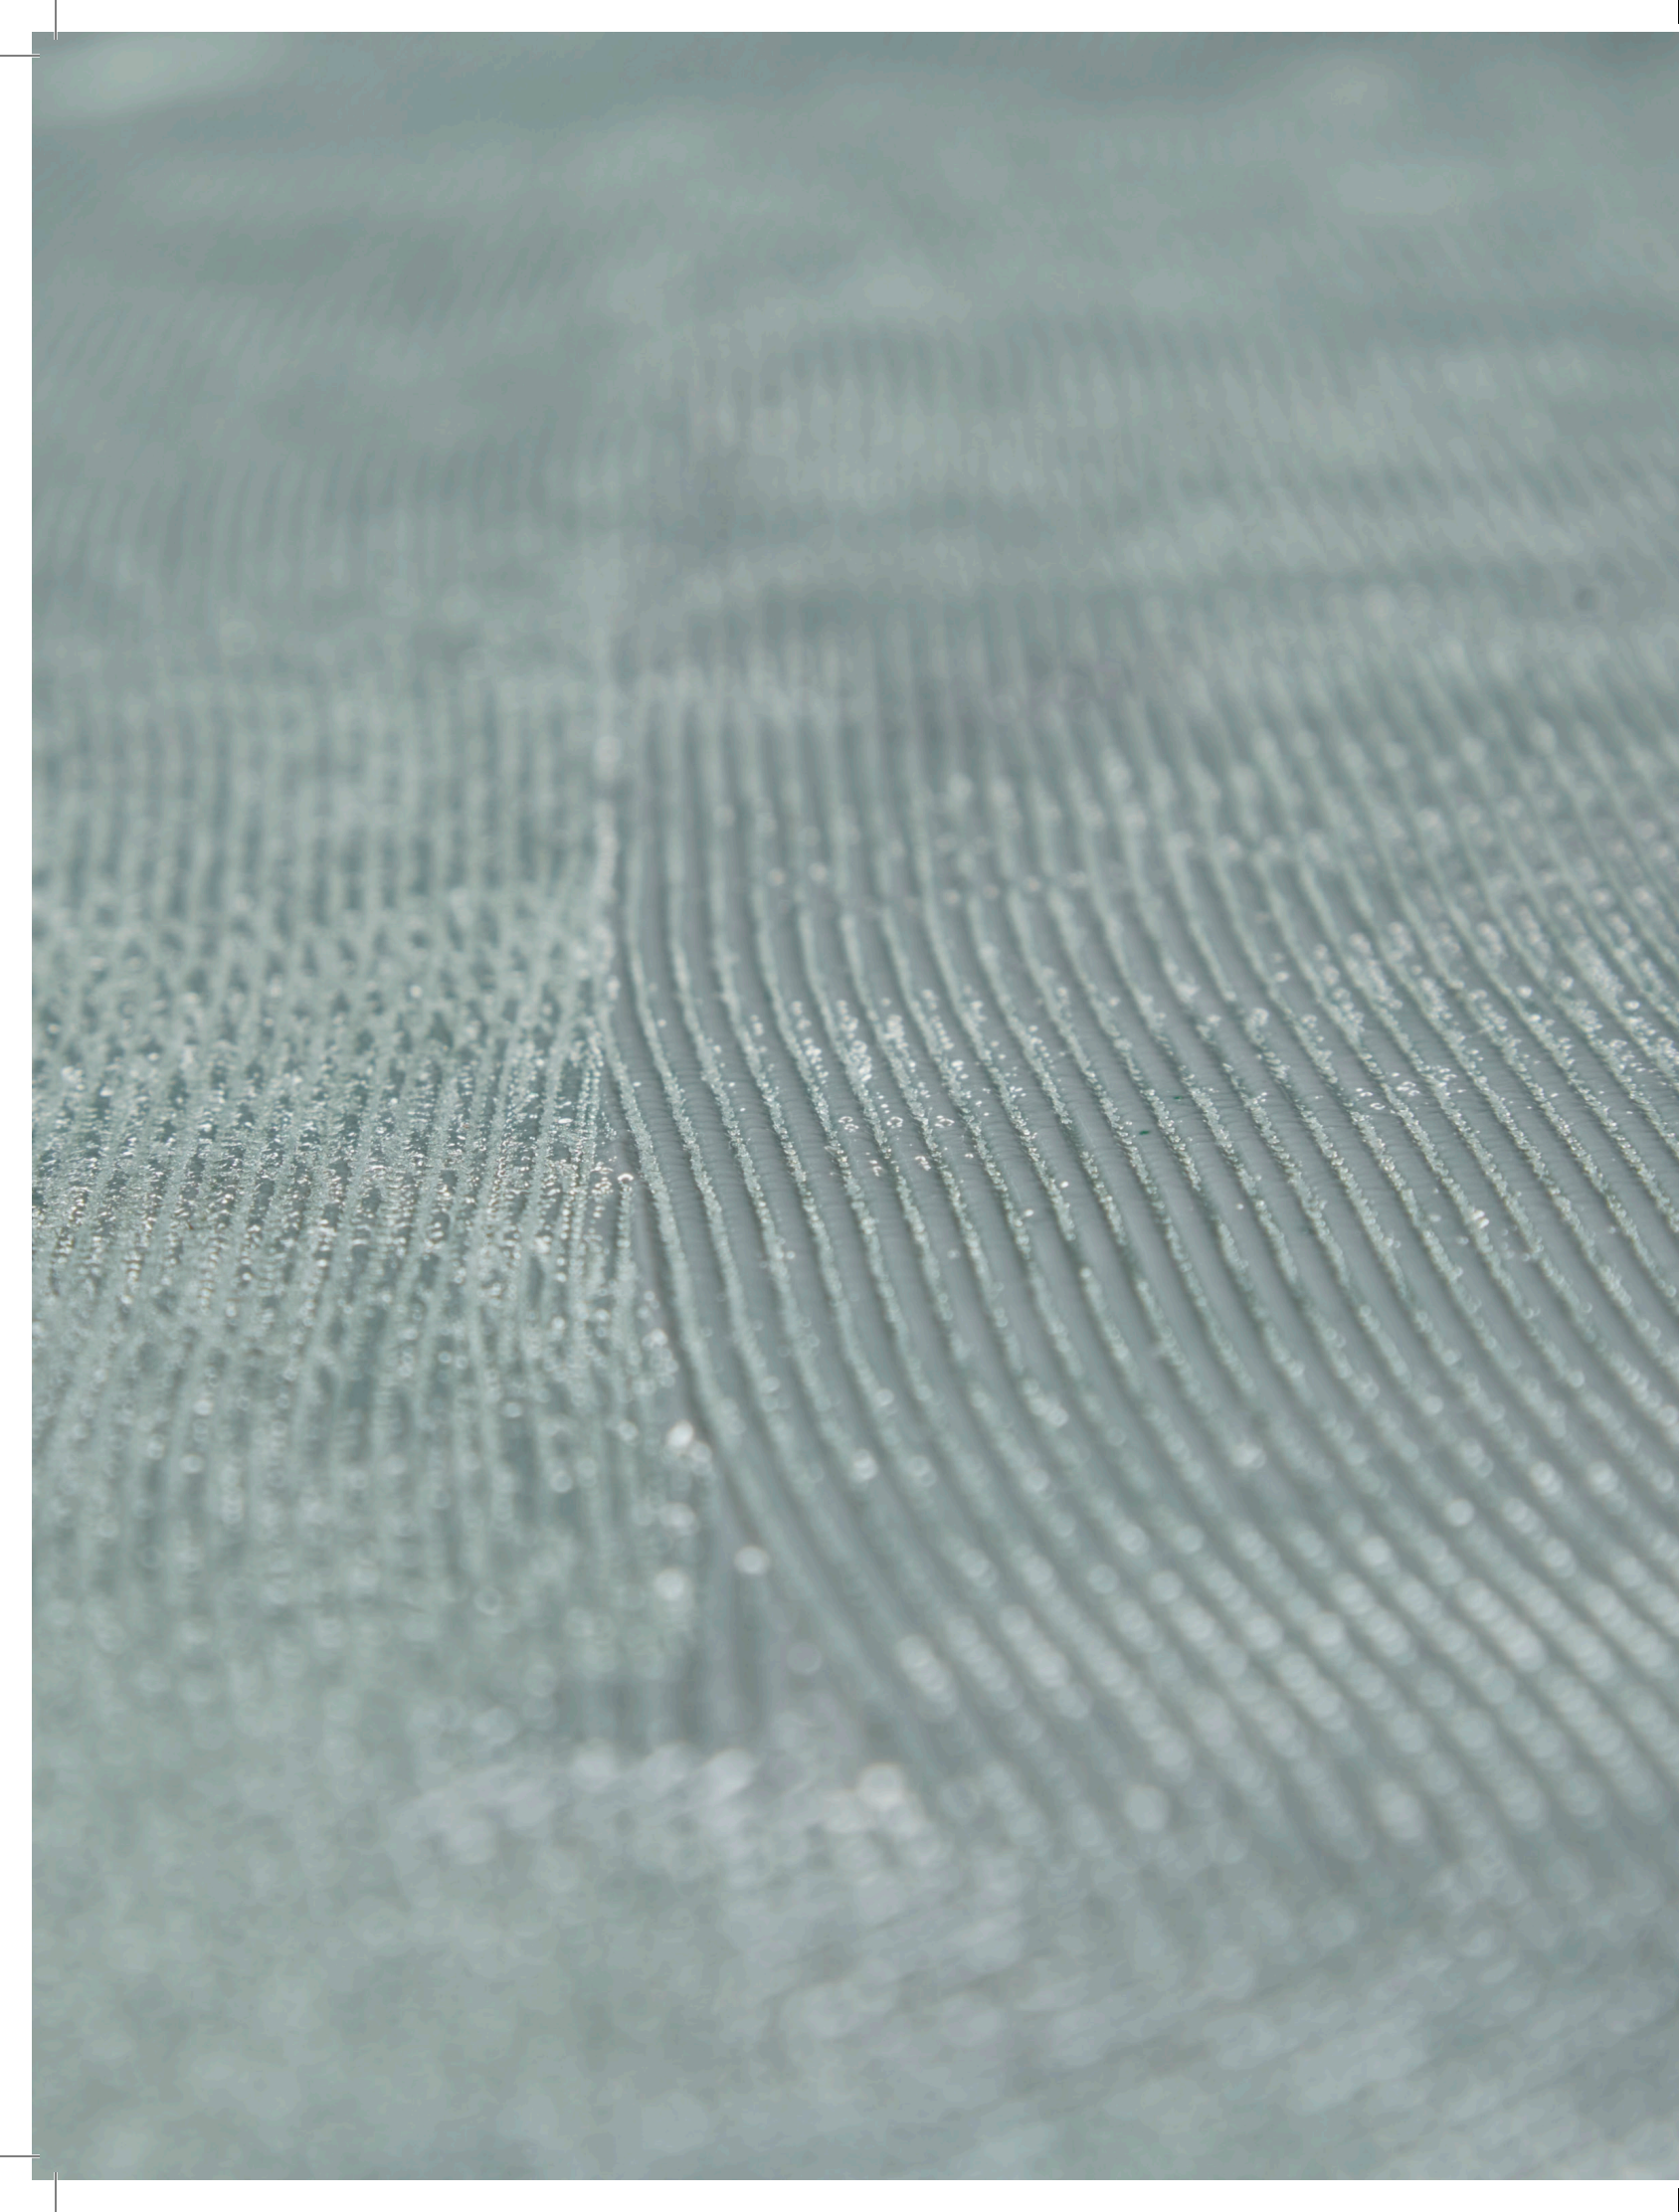

Contents

PrepWorx™	02
GroundWorx™	05
LokWorx™	10
FinishWorx™	16
CareWorx™	25

Fine Finish Patch | Floor Prep

201CA *Advanced Skim Coat Plus*
High moisture premium skim coat and patch

GOOD BETTER BEST



- Designed for high moisture applications
- Provides a smooth finish over concrete subfloors
- Fast drying—install floor covering in as little as 15 minutes
- Install from feather edge to 1/2 in (13 mm)
- Easy to mix, may be retempered multiple times without the addition of water to extend working time
- No priming necessary for most applications
- 10 lb bag
- Approx. coverage: 1/8"–36 ft
- 108 bags per pallet

Self-Leveling Patch | Floor Prep

178CA *ProPatch*
Unique patching compound

GOOD BETTER BEST



- Fast drying—install floor covering in as soon as 15 minutes
- Fortified mix with no additives required
- For skim coating, leveling and patching
- Interior and exterior applications
- 25 lb bag coverage: 35 ft² (1/8" thick)
- 96 bags per pallet

SLU | Floor Prep

244CA *Underlay SLU*
Self-leveling underlayment

GOOD BETTER BEST



- Fast setting
- Installer friendly
- Feather edge to 3/4" thickness
- 4,100 psi hardness, perfect for retail and light commercial
- 50 lb bag
- Approx. coverage per bag: 1/4"–25 ft², 1/8"–50 ft²
- 48 bags per pallet

Multi-Purpose Primer | Floor Prep

032VS *Shaw 9050*
Multi-function floor primer

GOOD BETTER BEST



- Easy roll-on application
- 300–350 ft²/gal spread rate
- Ideal for lightweight concrete, plywood, floor patch and other porous surfaces
- pH blocker neutralizes excess alkali to safe 5–9 range
- 4 gal pail, 48 pails per pallet

Fine Finish Primer | Floor Prep

246CA
Primer for Fine Finish Patch

GOOD BETTER BEST



- For use with Fine Finish Patch over non-porous surfaces
- Enhances bond strength of prep materials
- Required for patching over MoistureTek moisture mitigation system

SLU Primer | Floor Prep

CT561
Primer for SLU



- Prepares uneven concrete or exterior grade plywood floors for leveling
- Ready substrates for smoothing rough and spalled concrete
- Improves self-leveling for large format tile installations
- Increases bond strength
- Inhibits rapid water loss
- 1 gallon jug
- Approximate coverage: 600 ft² (concrete) 250–300 ft² (plywood or existing tile)

MRP™ | Floor Prep

235DE
Barrier primer that isolates contaminants

GOOD BETTER BEST



- Barrier primer for contaminants resulting from chemically or mechanically abated subfloors
- Protects up to 99% RH, 14 MVER, 14pH
- 2-part water-based epoxy
- Cures in 6 hours
- Covers 600 sf/4 gallon kit
- Provides moisture protection
- Can be used over a variety of challenging surfaces

MoistureShield™ | Floor Prep

256VS
Applied moisture barrier



- Controls moisture in most flooring conditions
- Spray on product
- Penetrates concrete 2 to 4 mm
- Applies and dries in as little as 3 hours
- Approximate coverage: 150–175 ft² per gal (new concrete after pour) 225 ft² per gal (existing porous concrete)
- 4 gallon pail, 36 pails per pallet

prepworx™

MoistureTek™ | Floor Prep

9125N Carpet Tile | 9125H Broadloom | 231DE Resilient
Applied moisture barrier



- Two-part epoxy
- 100% RH, >25 MVER, >12 pH
- 40-minute open time
- Install flooring 24 hours after concrete is poured
- Covers 400 ft²/4 gallon kit
- Cures in 6–8 hours depending on ambient temperature and humidity

Surface Prep EXT™ | Floor Prep

Concrete prep that creates a pristine concrete surface



- Concrete cleaner & heavy duty etching agent
- Use as alternative for mechanical methods of grinding and/or shot blasting
- When used properly (once applied and removed): Surface level contaminants will be removed & surface pH will be reduced
- 225 ft² coverage per gallon
- 4 gallon pail, 36 pails per pallet

Quik-Fill | Floor Prep

240DE
Concrete floor crack repair



- No substrate testing required
- No pre-mixing needed
- 10 year limited warranty
- 40 minute wait time after application before traffic to space (must keep space at 70° F temperature)
- Quick and easy installation prep and process
- Two cartridges per case

groundworx™

GroundWorks | Underlayment

087VS 100 sf roll | 351VS 450 sf roll
Acoustical underlayment



- Loose-lay GroundWorks and float LVT/LVP or glue GroundWorks and glue LVT/LVP
- Excellent sound suppression over concrete or wood truss system
- Greenguard® Indoor Air Quality Certified suitable for use with radiant heat flooring
- 3' x 33' 4" / 100 ft² per roll; also available in jumbo rolls – 6' x 75' / 450 ft²; 1.4 mm thick
- Approved Adhesives:
All Shaw Contract Resilient Adhesives

Hush III | Underlayment


214DE
Impact sound control



- Double glue installation or glue Hush III and float LVT/LVP
- 100% natural and sustainable cork
- Non-toxic and hypoallergenic
- Naturally resistant to mold and mildew
- Inhibits rapid water loss
- 1 gallon jug
- 3 mm (approx. 1/8") – 200 ft²/roll / 42" x 80'

Kovara MBX | Underlayment

095VS
Rolled moisture barrier for concrete floors

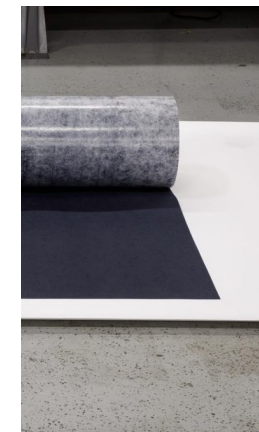

- Extreme moisture protection
- 10-year limited warranty
- Up to 100% RH
- 5' x 144' | 720 ft²
- Sold by the roll

Kovara 95 | Underlayment


094VS
Rolled moisture barrier for concrete floors



- Extreme moisture protection
- 10-year limited warranty
- Up to 95% RH
- 5' x 144' | 720 ft²
- Sold by the roll

Kovara MBX Tape | Underlayment

097VS
Seam tape for Kovara MBX



- 2.5" wide x 180' long
- Sold by the roll
- Blue color
- Covers the seams between cuts of Kovara MBX moisture barriers
- 12 rolls per box / 100 boxes per pallet

Kovara 95 Seam Tape | Underlayment

096VS
Seam tape for Kovara 95



- 2" wide x 180' long
- Sold by the roll
- Grey color
- Covers the seams between cuts of Kovara 95 moisture barriers
- 12 rolls per box / 112 boxes per pallet

Kovara Double-Sided Tape | Underlayment

098VS
Tape used with both Kovara MBX and Kovara 95



- 4" wide x 100' long
- Sold by the roll
- White color
- Seals the seams of regular Kovara MBX product installations to create a monolithic barrier against moisture and alkalinity
- Adheres Kovara 95 membrane to the concrete substance
- 12 rolls per box / 80 boxes per pallet

Duraworx | Cushion

DW205 Carpet Tile | DW204 Broadloom
Commercial urethane carpet cushion

GOOD BETTER BEST



- Go-to cushion for virtually any commercial installation (stretch-in, double glue broadloom, double glue under EcoWorx® Tile)
- Class III extra heavy traffic rating for stairs and roller traffic
- Breathable moisture barrier and antimicrobial content
- When adhering Duraworx to substrate: use 1000 Broadloom Adhesive + Indoor-Outdoor 3800 Adhesive
- When adhering Broadloom to Duraworx: use 1000 Broadloom Adhesive or Indoor-Outdoor 3800 Adhesive
- When adhering EcoWorx Carpet Tile to Duraworx: use 5000 Carpet Tile or 4151

Weight	47 oz
Thickness	0.2"
Density	19 lbs
Roll Size	6'x45'
yd²/Roll	30
Traffic Class	Class III – Extra Heavy
Warranty	Life of Carpet

DS-34 Doublestick Fiber | Cushion

034FS

GOOD BETTER BEST




- Synthetic fiber cushion for double glue applications
- Offers comfort underfoot and exceptional stability
- When adhering cushion to substrate, use 1000 Broadloom or Indoor-Outdoor 3800
- When adhering broadloom carpet to cushion, use 1000 Broadloom or Indoor-Outdoor 3800

Weight	34 oz
Thickness	0.3125 inches
Density	8.5 lbs/ft ³
Roll Size	6'x60'
yd²/Roll	40
Traffic Class	Class II – Heavy
Warranty	Commercial Limited Warranty
Green Label Plus Certified	GLP012
Cradle to Cradle Certification	Bronze

Rug Pad | Cushion

426PD 12' Rug Pad | 430PD 6' Rug Pad

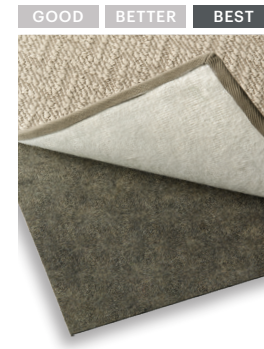

- High-quality rug pad will make your rug last longer, keep it beautiful longer and keep it in place better
- Made with 100% recycled face fiber that offers extra cushion and support
- Can be cut to length to fit all rug sizes
- Surface finish secures the back of the area rug to the padding
- Basket weave design on backing grips the floor, keeping the rug in place
- 10-year warranty

Density	7.5 lbs
Thickness	0.20"
Roll Size	6'x60' / 40 yd ² 12'x60' / 80 yd ²

Fiber Select | Cushion

Value fiber blend using a variety of fiber types to create a dense, long-lasting fiber cushion
Similar durability to Fiber Touch, without the premium fiber blend that gives Fiber Touch a consistent appearance



GOOD	BETTER	BEST	Style	020FS	024FS	028FS	032FS	040FS
			Weight	20 oz	24 oz	28 oz	32 oz	40 oz
			Thickness	0.235"	0.25"	0.30"	0.3125"	0.35"
			Density	7 lb/ft ³	8 lb/ft ³	8 lb/ft ³	8.5 lb/ft ³	9.5 lb/ft ³
			Roll Size	6'x60'	6'x60'	6'x60'	6'x60'	6'x60'
			Square Yards Per Roll	40	40	40	40	40
			Traffic Class	Class I	Class I	Class II	Class II	Class III
			Warranty	10 Year	10 Year	10 Year	10 Year	10 Year
			Radiant Panel	Class I	Class I	Class I	Class I	Class I
			Green Label Plus Certified	GLP012	GLP012	GLP012	GLP012	GLP012
			Cradle to Cradle Certification	Bronze	Bronze	Bronze	Bronze	Bronze

Fiber Touch | Cushion


Premium recycled synthetic fiber cushion
Premium blend of synthetic fiber provides long-lasting support in high-traffic areas



GOOD	BETTER	BEST	Style	206FT 6' width 207FT 12' width	246FT 6' width	286FT 6' width 287FT 12' width	326FT 6' width 327FT 12' width	410FT 6' width 409FT 12' width
			Weight	20 oz	24 oz	28 oz	32 oz	40 oz
			Thickness	0.235"	0.25"	0.30"	0.3125"	0.35"
			Density	7 lb/ft ³	8 lb/ft ³	8 lb/ft ³	8.5 lb/ft ³	9.5 lb/ft ³
			Roll Size	6'x60' 12'x60'	6'x60'	6'x60' 12'x60'	6'x60' 12'x60'	6'x60' 12'x60'
			Square Yards Per Roll	40	40	40	40	40
			Traffic Class	Class I	Class I	Class II	Class II	Class III
			Warranty	10 Year	10 Year	10 Year	10 Year	10 Year
			Radiant Panel	Class I	Class I	Class I	Class I	Class I
			Green Label Plus Certified	GLP012	GLP012	GLP012	GLP012	GLP012
			Cradle to Cradle Certification	Bronze	Bronze	Bronze	Bronze	Bronze

CushionWorx® | Cushion


CU034 Carpet Tile
Commercial polyethylene foam cushion



GOOD	BETTER	BEST	Style
			• Premium polyethylene foam cushion for EcoWorx® Tile
			• Double Glue Installation
			Weight 40 lbs/roll
			Thickness 0.125" 3.18 mm
			Density 4.0 lbs/ft ³
			Roll Size 76" x 150' 1.93 m x 45.72 m
			yd²/Roll 105.6 yd ²
			Traffic Class Class II - Heavy
			Warranty Limited Warranty

CushionWorx™ Lite | Cushion

CU024 Carpet Tile
Commercial polyethylene foam cushion

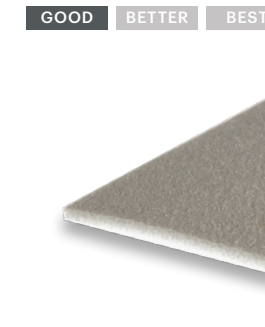

GOOD	BETTER	BEST	Style
			• Premium polyethylene foam cushion for EcoWorx® Tile
			• Double Glue Installation
			Weight 20 lbs/roll
			Thickness 0.08" 2.032 mm
			Density 4.0 lbs/ft ³
			Roll Size 76" x 120' 1.93 m x 36.58 m
			yd²/Roll 84.4 yd ²
			Traffic Class Class I - Moderate
			Warranty Limited Warranty

35 MC | Adhesives + Epoxy

CA884
Premium urethane based

GOOD BETTER BEST



- Hardwood Adhesive
- No subfloor moisture testing required
- Ultimate moisture and sound control
- Ideal for high moisture content slabs
- Crack suppressant
- Low odor — VOC compliant
- Pail includes trowel for moisture control installation
- Excellent green strength
- 35 ft²/gal with enclosed trowel blade — 60 ft²/gal as adhesive only
- 4-gal. pail, 36 pails per pallet

3-in-1 Ultra | Adhesives + Epoxy

185CM *Hardwood* | 181CA *Rigid Mineral Core*
Premium modified silane

GOOD BETTER BEST



- No subfloor moisture testing required when troweled as a moisture barrier
- Crack suppressant
- Ultimate moisture and sound control
- Low odor, low VOC
- Greenguard® certified for indoor air quality
- Clip-on trowel blade provided with each pail
- 60-70 ft²/gal for Mineral Core products using a 1/8" x 1/8" x 1/8" U-notch trowel
- Easy cleanup with soap and water
- 4-gal. pail, 48 pails per pallet

UnGlu'd | Adhesives + Epoxy

321CA 4 gal
Adhesive and mastic remover

GOOD BETTER BEST



- Eliminates the need for time-consuming mechanical or abrasive removal, as well as the use of toxic chemicals
- Non-toxic and fully biodegradable
- Single component adhesive remover
- Minimum of 2 hour dwell time, and up to 24 hours (overnight)
- Will not affect the bond of new adhesive applications when used properly
- Apply at a rate of 100 sf/gallon

LokSeam | Adhesives + Epoxy

LOKSE | LKSEA *Replacement Applicator* | LKSER *Replacement Kit*
Used to join carpet and resilient products

GOOD BETTER BEST



- LokSeam Replacement Applicator
- LokSeam Replacement Kit: 3 50-mil cartridges and 5 mixers
- LokSeam Starter Kit: applicator, 2 50-mil cartridges (2-part), 5 mixers

1000 Broadloom Adhesive | Adhesives + Epoxy

H1000 4 gal
Premium multi-purpose

GOOD BETTER BEST



- Early leg development
- Aggressive tack, fast grab
- Up to 2 hours working time
- LEED v4 contributing
- Commercial Broadloom: 8 – 10 yd²/gallon with 1/8" x 1/8" x 1/8" U-notch
- Double Stick (pad to floor): 10 – 12 yd²/gallon with 3/32" x 3/32" x 3/32" V-notch
- Double Stick (carpet to pad): 4–8 yd²/gallon with 1/8" x 1/8" x 1/6" U-notch

3800 Indoor-Outdoor | Adhesives + Epoxy

H3800 *Broadloom* | N3800 *Carpet Tile*
For interior and exterior use

GOOD BETTER BEST



- Universal indoor/outdoor adhesive
- Suitable for indoor/outdoor products in light commercial traffic, walk off and entryways
- Light commercial traffic, residential, walk off and entry way BL: 8–10 yd²/gal with 1/8" x 1/8" x 1/8" U-notch trowel
- 45 lbs (48/pallet)
- 12 lbs / 99% RH / pH 7–12
- 1 year warranty
- 4-gal pail

Broadloom Seam Sealer | Adhesives + Epoxy

H4000
Latex broadloom seam sealer

GOOD BETTER BEST



- Application: 1/8" bead
- Broadloom seam sealer
- Coverage: 550–600 linear feet/qt
- 1 qt, 2 lbs (12 qts/case)
- Previously 4000 (H4000)
- CRI Green Label Plus Certified and SCAQMD compliant

8300 Seam Sealer | Adhesives + Epoxy

H8300
Moisture impervious carpet seam sealer

GOOD BETTER BEST



- Moisture impervious seam sealer
- 138–150 linear feet
- 8 oz bottle

5000 Carpet Tile Adhesive | Adhesives + Epoxy

N5000 4 gal | H5001 1 gal
Premium releasable PSA

GOOD BETTER BEST



- Immediate access for light traffic
- Outstanding for high traffic areas
- Aggressive tack, fast grab
- LEED v4 contributing
- Available in 1 and 4 gal. pails
- 28 – 33 yd²/gal. spread rate with 1/16" x 1/32" x 5/64" U-notch trowel
- 35 – 40 yd²/gal. spread rate with 3/8" foam or medium nap roller
- 15 lbs / 97% RH / pH 5-11

3000 Carpet Tile Adhesive | Adhesives + Epoxy

182CA 4 gal | 183CA 1 gal
Releasable PSA

GOOD BETTER BEST



- Immediate access for light traffic
- Great for moderate traffic areas
- LEED v4 contributing
- Available in 1 and 4 gal. pails
- 28 – 33 yd²/gal. spread rate with 1/16" x 1/32" x 5/64" U-notch trowel
- 35 – 40 yd²/gal. spread rate with 3/8" foam or medium nap roller
- 10 lbs / 95% RH / pH 5-11

4151 | Adhesives + Epoxy

9150N Carpet Tile
Premium universal commercial adhesive

GOOD BETTER BEST



- Pressure sensitive adhesive for carpet tile products
- 35 – 40 yd²/gal spread rate with paint roller
- 28 – 33 yd²/gal spread rate with 1/16" x 1/32" x 5/64" U-notch trowel
- 4 gallon pail
- 40 lbs (36 pails per pallet)
- 12 lbs / 99% RH / pH 12

LokDots Adhesive | Adhesives + Epoxy

OOLDR | OOLDA Applicator | LOK4S 4 Roll Sleeve
Carpet tile adhesive system

GOOD BETTER BEST



- LokDots™ adhesive dot applicator, sleeve, and half-sleeve
- No moisture or pH testing required in non-hydrostatic situations (full and half sleeves)
- 1,500 dots per roll
- 250 yd²/sleeve; 125 yd²/half-sleeve
- OOLDR 8 rolls / sleeve (3 lbs)
- LOK4S 4 rolls / half-sleeve (2 lbs)

LokWorx Tabs | Adhesives + Epoxy

LWRX0
Carpet tile adhesive system

GOOD BETTER BEST



- Applicator – 1 applicator
- Box – 500 adhesive squares/roll
- Case – 10 boxes of 500 squares/roll
- 5 lbs / 85% RH / 12 pH

4200 Semi-Wet Resilient Adhesive | Adhesives + Epoxy

163CA 1 gal. 164CA 4 gal. | Resilient Tile
165CA 1 gal. 166CA 4 gal. | Resilient Sheet
Premium resilient commercial adhesive

GOOD BETTER BEST



- Contains recycled polymer content
- Semi-wet adhesive
- One-part system increases ease of install
- Commercial underbed bond warranty
- LEED v4 contributing
- 175 – 225 ft²/gal spread rate using 1/16" x 1/32" x 1/32" U-notch trowel
- 4-gal pails, 48 pails per pallet
- 1-gal pails, 180 pails per pallet
- 12 lbs / 99% RH / pH 5-12

2200 Semi-Wet Resilient Adhesive | Adhesives + Epoxy

180CA 1 gal. 179CA 4 gal. | Resilient Tile
230CA 4 gal. | Resilient Sheet
Commercial resilient adhesive

GOOD BETTER BEST



- Semi-wet adhesive
- 175 – 225 ft²/gal spread rate using 1/16" x 1/32" x 1/32" U-notch trowel
- 4-gal pails, 48 pails per pallet
- 1-gal pails, 180 pails per pallet
- 10 lbs / 95% RH / pH 5-12

4151 | Adhesives + Epoxy

340VS Resilient
Premium universal commercial adhesive

GOOD BETTER BEST



- Semi-wet adhesive for resilient products
- 175 – 200 ft²/gal spread rate with 1/16" x 1/32" x 1/32" U-notch trowel
- 4 gallon pail
- 40 lbs (36 pails per pallet)
- 12 lbs / 99% RH / pH 12

S150 Spray | Adhesives + Epoxy

066VS Resilient Tile | 067VS Resilient Sheet
Spray commercial adhesive

GOOD BETTER BEST

- LVP / LVT and fiberglass-backed sheet goods adhesive
- Commercial-grade with underbed warranty
- Fast, easy spray application
- Low VOC
- Up to 150 ft² per can
- Up to 95% RH
- 22 oz spray can



MS Resilient | Adhesives + Epoxy

304VS
Premium resilient commercial adhesive

GOOD BETTER BEST

- No subfloor moisture testing required
- No pH testing required
- Sound control
- High-strength, waterproof bond
- Great for kitchens and baths, where continuous moisture is present
- One part — no mixing
- 175 – 225 ft²/gal spread rate with 1/16" x 1/32" x 1/32" U-notch trowel
- 2-gal. pails, 60 pails per pallet



Rubber Tread Nose Caulk | Adhesives + Epoxy

118CA
Rubber stair tread nose caulk epoxy

GOOD BETTER BEST

- Two-component, solvent-free epoxy nose caulking adhesive
- Must be used to qualify for warranty
- 13.5 oz tube
- 30 linear feet x 1/4" bead per cartridge



Transition Tape | Adhesives + Epoxy

191CA
Double-sided adhesive tape

GOOD BETTER BEST

- 1" x 25' Roll
- Immediate shear strength
- Long-lasting permanent bond
- Allows for natural expansion and contraction of materials
- Eliminates the need for wet adhesives, slow drying contact adhesives, staples, screws or nails
- Can be used with rubber transitions and metal pinless tracks



Wall Base Adhesive | Adhesives + Epoxy

141VS 30oz Tube | 166VS 1 gal
Premium wall base adhesive

GOOD BETTER BEST

- Use with rubber and vinyl wall base
- Exceptional wet grab
- Easy clean-up
- Low odor, low VOC
- Available in 1 gal and 4 gal pail (220–240 linear feet/gal for 4" wall base)
- Also available in 30-oz. tube* (50–60 linear feet/per tube for 4" wall base)
- **only available by the carton (12 tubes)*



Rubber Tread Glue | Adhesives + Epoxy

117CA
Premium rubber stair tread adhesive

GOOD BETTER BEST

- Solvent-free acrylic adhesive
- Available in 1 gal pail
- 125–150 square feet per gallon using 1/16" x 1/16" x 1/16" square notch trowel
- 225–250 square feet per gallon using 1/32" x 1/16" x 1/32" U-notch trowel



TTT Adhesive Tread-Trim-Tack Strip | Adhesives + Epoxy

192CA 10.5oz | 193CA 28oz
Elastomeric tubed adhesive

GOOD BETTER BEST

- Modified-silane adhesive
- Two-hour curing time
- High bond strength
- Excellent elongation properties
- Spread rate will vary based on application
- Sold by box only
- 10.5 oz tube / 12 tubes per box / 50 boxes per pallet
- 28 oz tube / 4 tubes per box / 126 boxes per pallet



Hardwood Coordinating Trim | Transitions & Trims




	Flush Reducer	Flush Stairnose	Overlap Reducer	Overlap Stairnose	Quarter Round	T-Mold	Threshold
Authenticity CA326	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12
Bespoke CA350	CRH12	CSH12	n/a	n/a	CAQTR	CATMH	CCH12
Camaret 203UV	O3W38	n/a	n/a	O3W73	O3W07	O4W19	O2W74
Handcrafted CA364	CRD58	CSD58	CORD5	COSD5	CAQTR	CTM58	CTDH5
Refined CA308	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12
Resurgence CA286	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12

Resilient Coordinating Trim | Transitions & Trims



	Quarter Round	OmniTrim™	Overlap Stairnose	Baby Threshold	Reducer	Flush Stairnose	T-mold
Composed	O1X46	n/a	O1X95	O1X20	O1X70	O2W17	O2X62
Concrete	O1X46	n/a	O1X95	O1X20	O1X70	O2W17	O2X62
Defined	O1V45	n/a	O1V94	O1V18	O1V69	O2W16	O2W61
Stratum 500	O1W27	n/a	O1W78	O1W02	O1W54	O2W01	O2W24
Stratum 700	O1W31	n/a	O1W80	O1W06	O1W56	O2W06	O2W28
Stratum Eiris	O1W40	n/a	O1W90	O1W14	O1W65	O2W13	O2W57
Stratum Linear	O1V39	n/a	O1V89	O1V13	O1V64	O2W12	O2V56
Reside	SCQT1	SCUN1	SCSN1	n/a	n/a	n/a	n/a
Terrain	SCQT1	SCUN1	SCSN1	n/a	n/a	n/a	n/a
Terrain II*	SCQT2	SCUN2	SCSN2	n/a	n/a	n/a	n/a
Stratum XL	O1W29	n/a	O1X78	O1W04	O1X54	O2W04	O2W26
Repose	225DE	n/a	229DE	227DE	228DE	230DE	226DE
Respite	257VS	n/a	262VS	260VS	261VS	263VS	258VS

*Only available in select colors of Terrain II.




	Quarter Round	T-Molding	Multi-Reducer	Flush Stairnose	Baby Threshold	Overlap Stairnose
Quiet Cover	350VS	349VS	348VS	n/a	n/a	347VS
Solitude	350VS	349VS	348VS	n/a	380VS	347VS
Branching Out	375VS	376VS	378VS	379VS	377VS	n/a

Rubber Transitions | Universal Transitions & Trims

Add a functional finishing touch to your coordinated color scheme with FinishWorx™ Transition Strip products. Available in five profiles, transition pieces are available in 10 colors that coordinate with the FinishWorx™ Wall Base color line.

Pinless Metal Track


142VS



- Aluminum finish, no colour
- 6' sticks sold by carton
- Each carton contains 6 sticks or 36'
- Used with Snap-Down T-Molding 1.125" 145VS and Snap-Down T-Molding 2" 147VS

Snap-Down T-Molding 1.125"

145VS



- Used with Pinless Metal Track
- 12' sticks sold by carton
- Each carton contains 3 sticks or 36'

1" Reducer


143VS



- 12' sticks sold by carton
- Each carton contains 3 sticks or 36'

1.625" Reducer


146VS



- 12' sticks sold by carton
- Each carton contains 3 sticks or 36'

1.31" Reducer


144VS



- 12' sticks sold by carton
- Each carton contains 3 sticks or 36'

Snap-Down T-Molding 2"


147VS



- Used with Pinless Metal Track
- 12' sticks sold by carton
- Each carton contains 3 sticks or 36'


The Wedge

266VS

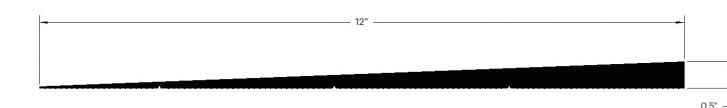

- Subfloor Leveling Transition
- 1' width x 4' length
- 4 pieces per carton, or 16 linear feet

Colors

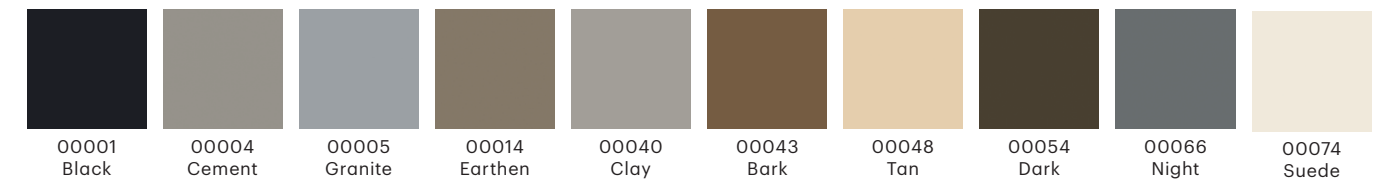




Metal transitions come in an 84" L piece. They are sold by the box, containing 5 pieces per box. See below for patent-pending tap down feature that eliminates space between trim and flooring.

LVT Trim Profiles


SQUARE CAP

Transitions to carpet or similar height surfaces.

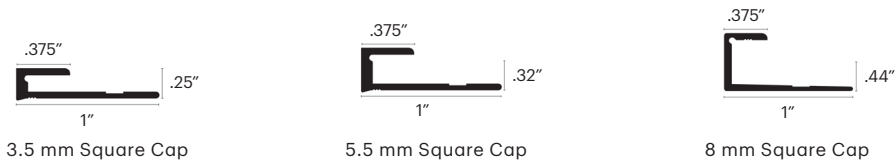


T-MOLD

Transitions to carpet or similar height surfaces. Both sides tap down independently.

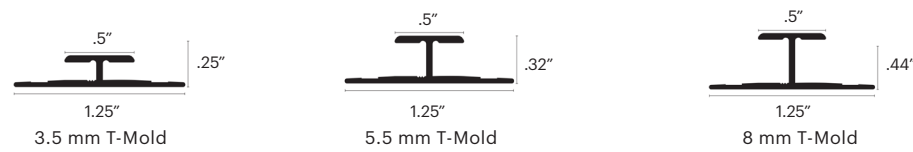

REDUCER



ADA compliant — transitions to lower surface flooring.



TAP DOWN


Exclusive patent-pending tap down feature to accommodate multiple heights eliminates space between trim and flooring.

- Proprietary Tap Down Design makes it easy to tap down to accommodate smaller floor height
- Tap down with a white rubber mallet to secure fit

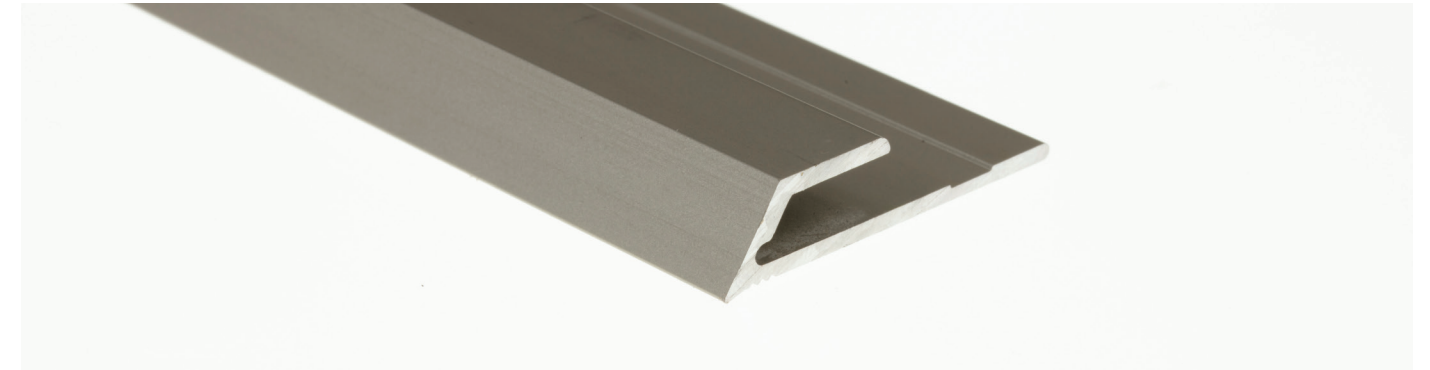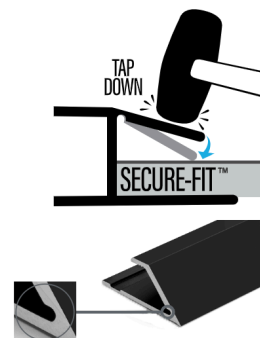

Style Name	Thickness	Style Number	Color Name
LVT Square	8 mm	119CA	Satin Silver
LVT Square	8 mm	120CA	Satin Nickel
LVT T-Mold	8 mm	125CA	Satin Silver
LVT T-Mold	8 mm	126CA	Satin Nickel
LVT Square	5.5 mm	128CA	Satin Silver
LVT Square	5.5 mm	129CA	Satin Nickel
LVT T-Mold	5.5 mm	134CA	Satin Silver
LVT T-Mold	5.5 mm	135CA	Satin Nickel
LVT Square	3.5 mm	137CA	Satin Silver
LVT Square	3.5 mm	138CA	Satin Nickel
LVT Reducer	3.5 mm	140CA	Satin Silver
LVT Reducer	3.5 mm	141CA	Satin Nickel
LVT T-Mold	3.5 mm	143CA	Satin Silver
LVT T-Mold	3.5 mm	144CA	Satin Nickel

Colors*

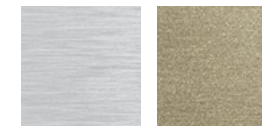

Satin Silver Satin Nickel


**Long-lasting anodized aluminum finishes in 3 profiles and 3 colors*

Rubber Stair Tread | Stair Treads

Shaw Contract offers two types of stair treads; Standard and Luminous. These are both made of rubber and used as a slip resistant floor covering. Both types come in two sizes - 4 foot and 6 foot. These are a Raised Round pattern tread.

- Slip resistance for increased safety
- Mask substrate irregularities
- Available on GSA Contract
- FloorScore Certified
- 5 Year Warranty
- Recommended adhesive: 117CA Rubber Tread Glue
- Recommended caulk: 118CA Rubber Tread Nose Caulk

Integrated Stair Tread | Stair Treads



	Standard Stair Tread 4' 246VS	Standard Stair Tread 6' 247VS
Construction	TP Rubber	TP Rubber
Overall Thickness	1/8" (3.175 mm)	1/8" (3.175 mm)
Nominal Dimensions	2" H (nose) x 48" L x 20" D	2" H (nose) x 72" L x 20" D
Packaging	6 pieces per box - 24 linear feet	4 pieces per box - 24 linear feet

Luminous Integrated Stair Tread | Stair Treads




Luminous Stair Tread 4' | 252VS

Luminous Stair Tread 6' | 253VS

	Luminous Stair Tread 4' 252VS	Luminous Stair Tread 6' 253VS
Construction	TP Rubber	TP Rubber
Overall Thickness	1/8" (3.175 mm)	1/8" (3.175 mm)
Nominal Dimensions	2" H (nose) x 48" L x 20" D	2" H (nose) x 72" L x 20" D
Packaging	6 pc per box - 24 lin ft	4 pc per box - 24 lin ft




Colors

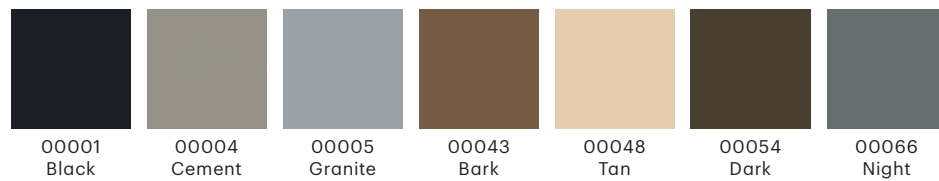


Micro Transitions

Specifications

Style	Dimensions	Pieces per Carton	Linear Feet per Carton	Weight per Carton
Micro Transition 0.2 in 269VS	2"W x 0.27"H x 94"L	10	78	8 lb.
Micro Transition 0.25 in 268VS	2"W x 0.30"H x 94"L	10	78	10 lb.
Micro Transition 0.28 in 267VS	2"W x 0.33"H x 94"L	10	78	14 lb.

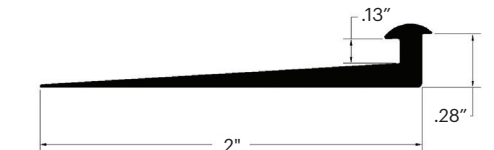

Colors

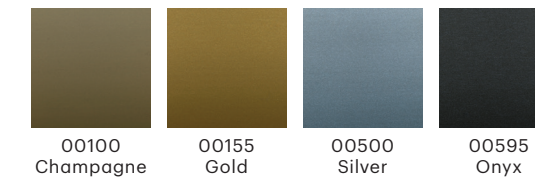

Weld Rods

Style Name	Style Number	Construction	Length	Products to be Used with
Weld Rod	353VS	PVC	164'	Basstones™ 0301V Inhabit 4106V Naturelife™ Wood 0002V Reed 0797V Roji 0798V Tatami 0796V Vitality 0873V
Bio-Based Weld Rod	270VS	PVC-free	197'	In Tandem 0896V Innate Linen Sheet 4366V Innate Sheet 4219V Innate Stria Tile 4367V
Rexcourt Weld Rod	021VS	PVC	330'	Rexcourt™ 0004V
Weld Rod	184CA	PVC	320'	Vitality Hues 4376V Vitality Tones 4375V

Vinyl & Rubber Wall Base | Wall Base

Through color construction, zero stress whitening on the corners, softer feel for ease of installation, and regional availability.

4" x 1/8" Rubber Cove Base



167CA | Length Cartons:

- 4' Length
- 30 pieces per box
- 120' per box
- 72 boxes per pallet

168CA | Roll Cartons:

- 120' roll per box
- 32 boxes per pallet

4" x 1/8" Rubber Straight Base



169CA | Length Cartons:

- 4' Length
- 30 pieces per box
- 120' per box
- 72 boxes per pallet

170CA | Roll Cartons:

- 120' roll per box
- 32 boxes per pallet

4" x .080" Vinyl Cove Base



171CA | Length Cartons:

- 4' Length
- 30 pieces per box
- 120' per box
- 72 boxes per pallet

172CA | Roll Cartons:

- 160' roll per box
- 32 boxes per pallet

6" x 1/8" Rubber Cove Base



173CA | Length Cartons:

- 4' Length
- 24 pieces per box
- 96' per box
- 48 boxes per pallet

174CA | Roll Cartons:

- 96' roll per box
- 20 boxes per pallet

4.5" x 1/8" Rubber Cove Base



175CA | Roll Cartons:

- 4" Lengths
- 30 pieces per box
- 120' roll per box
- 64 boxes per pallet

185CA | Roll Cartons:

- 120' roll per box
- 20 boxes per pallet

4" x 1/8" EcoWall Base*



176CA | Length Cartons:

- 4' Length
- 30 pieces per box
- 120' per box
- 72 boxes per pallet

177CA | Roll Cartons:

- 120' roll per box
- 32 boxes per pallet

*EcoWall Base rubber made from up to 90% recycled material. Available in three colors.


Recommended Adhesive:

141VS Resilient Tile (12-30 oz tubes)


166VS Wall Base Resilient Adhesive (1 gal)

Vinyl & Rubber Wall Base Colors | Wall Base


InStock colors | ship in two business days

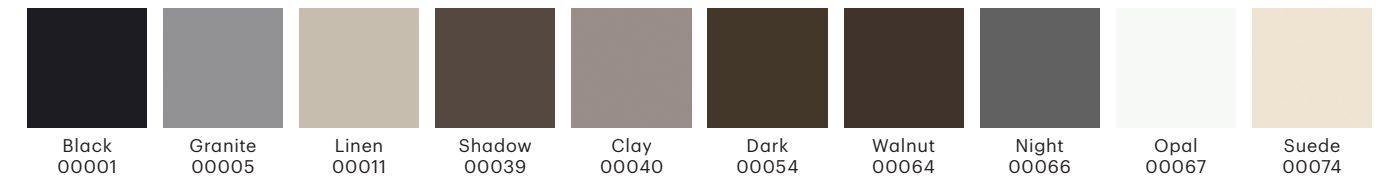


Quick Ship colors | ship in 10 business days

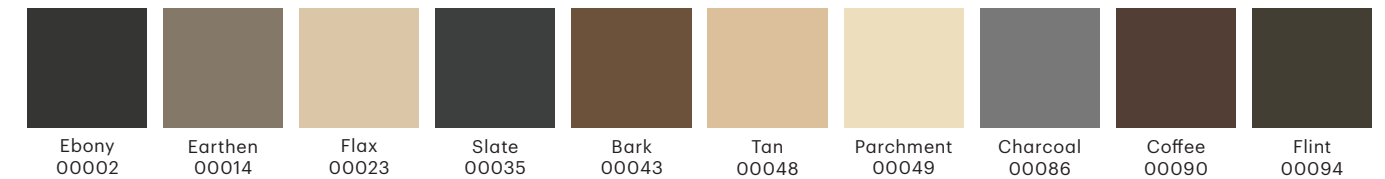

Made to Order colors

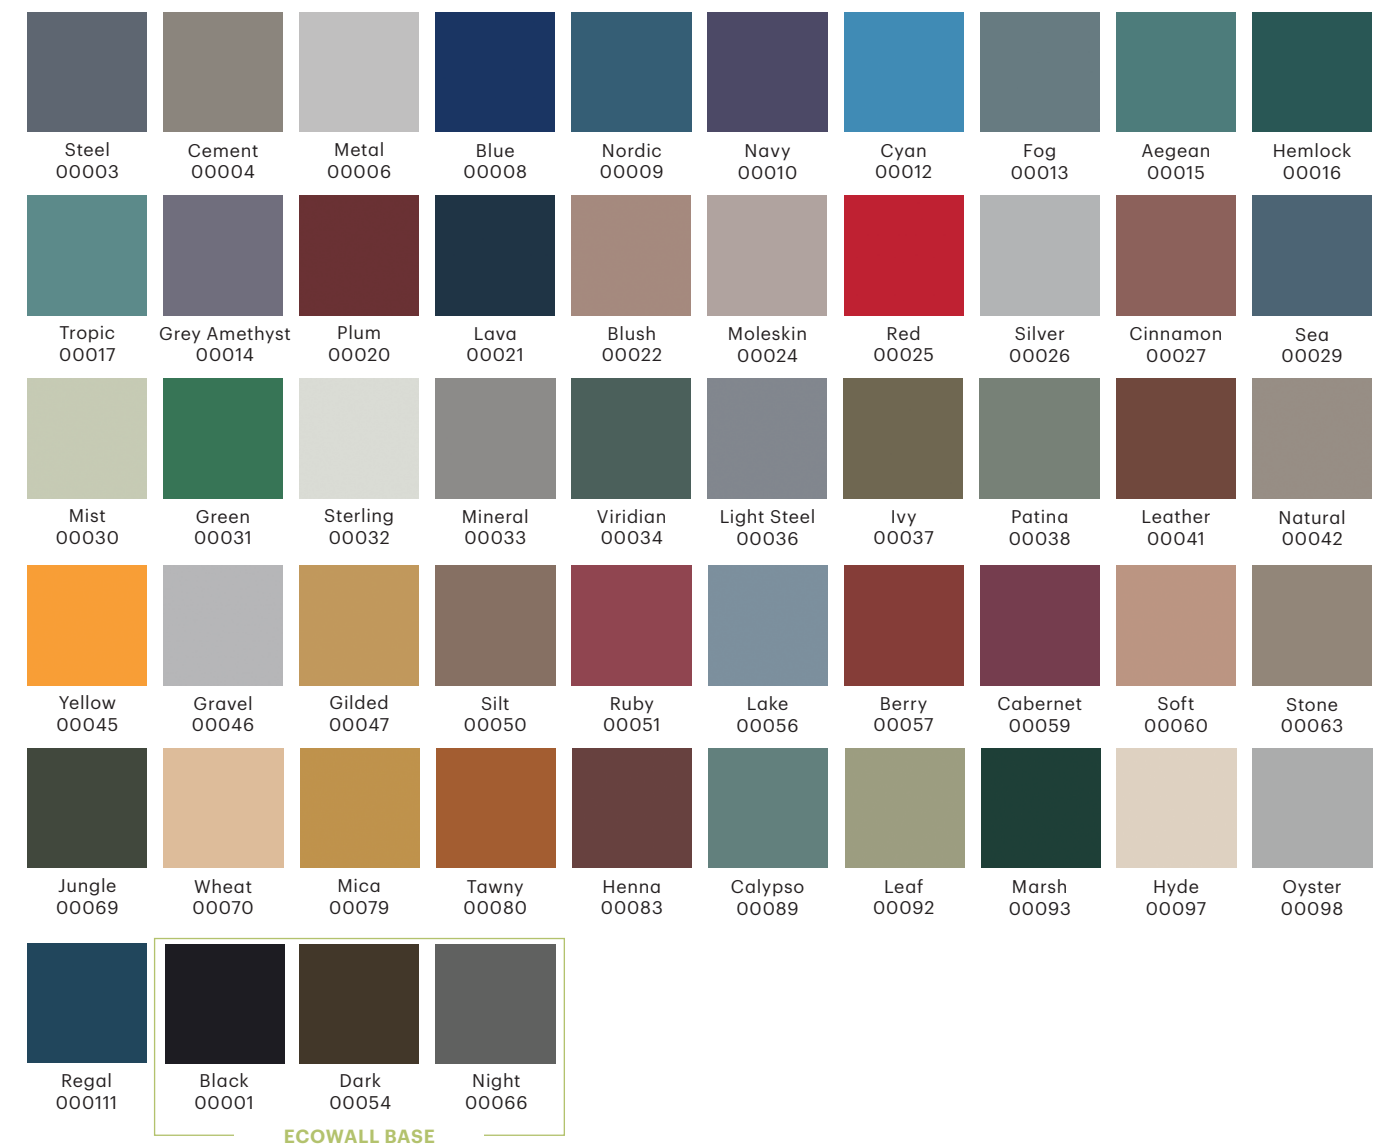


6" Detail Profile | Sculpted Base




Style Number 303VS
Construction Thermoplastic Rubber
Gauge 1/4 in
Size 6 in x 96 in
Adhesive Wall Base Adhesive
 141VS | Tube
 166VS | 1 Gallon
Packaging 96" Length
 6 pieces per box
 48 linear ft per box

4.5" Detail Profile | Sculpted Base




Style Number 150VS
Construction Thermoplastic Rubber
Gauge 1/4 in
Size 4.5 in x 96 in
Adhesive Wall Base Adhesive
 141VS | Tube
 166VS | 1 Gallon
Packaging 96" Length
 6 pieces per box
 48 linear ft per box

4.5" Angle Profile | Sculpted Base




Style Number 149VS
Construction Thermoplastic Rubber
Gauge 1/4 in
Size 4.5 in x 96 in
Adhesive Wall Base Adhesive
 141VS | Tube
 166VS | 1 Gallon
Packaging 96" Length
 6 pieces per box
 48 linear ft per box

Quarter Round Profile | Sculpted Base



Style Number 151VS
Construction Thermoplastic Rubber
Gauge 3/4 in
Size 0.75 in x 96 in
Adhesive Wall Base Adhesive
 141VS | Tube
 166VS | 1 Gallon
Packaging 96" Length
 12 pieces per box
 96 linear ft per box

Colors

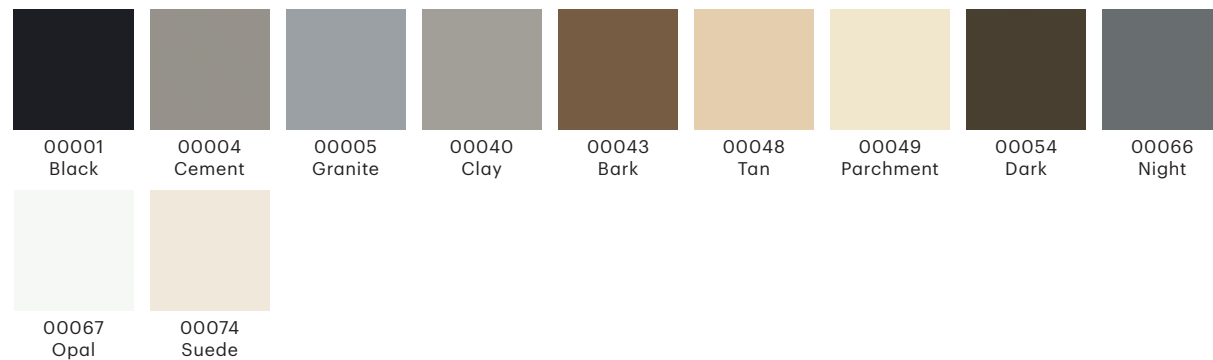

Hard Surface Cleaner | St. Jude Program

107CA 32oz Spray
 196CA 1 gal. Refill



- Multi-purpose cleaner
- Removes tough dirt, grease and scuffs
- No need to rinse
- Safe for all ceramic, pre-finished hardwood, laminate and resilient (LVT and sheet goods)
- 107CA: 32 oz. sold by box only (12 per box)
- 196CA: 1 gal. sold by box only (4 per box)

Hard Surface Cleaner Concentrate | St. Jude Program

197CA 32oz



- Removes dirt, grease and scuffs
- Leaves floors sparkling clean
- No need to rinse
- Makes up to 64 ready-to-use bottles based on strength needed
- Sold by case only (6 bottles per carton)

Carpet Stain & Soil Remover | St. Jude Program

111CA 32oz Spray



- Anti re-soiling treatment
- Approved by the Wool Safe Institute and The Carpet and Rug Institute Inc.
- No rinse/ no residue formulation
- 32 oz. sold by box only (6 per box)

Scratch Patch | Resilient Maintenance

243CA 1 Quart
 Durable finish applied to luxury vinyl flooring



- Covers approximately 800-1,000 sq ft per quart
- Apply in light amounts (0.5 mils), *do not* over apply or allow to build on surface
- Dry time is approximately 30 minutes. Wait at least one hour if applying a 2nd coat (optional)
- 1 quart bottle



By purchasing a Shaw Floors cleaning product, you support the life-saving mission of St. Jude Children's Research Hospital®.

Clean never felt so good.



