Quick Ship
Product Catalogue

ShawContract®

2022

QUICK SHIP

contents

carpet tile 02
broadloom 44
resilient 68
accessories + resources 73

Mix, match and make hast. Get hundreds of products in two week or less.
Soft Surface Quick Ship available up to 2,500 square yards.
Hard Surface Quick Ship available up to 25,000 square feet.

CARPET TILE

Allure Tile | Bright Work quick ship

Tile Size | 24x24

27585 Gleam

Coordinating Products
Amplify, Flare, Flicker, Glimmer Tile, Illuminate, Shine Tile

Product Specifications

Style Number	59327	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.40 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5276 ozs./yd³	9.50 kilotex
Product Size	24 in x 24 In	61 cm x 61 cm
Secondary Backing	Ecoworx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

Golden 27150


Flashpoint 27485

Spark 27500

Starlight 27504

Moonlit 27505


Gleam 27585


Bronzed 27750

Afterglow 27755

Gloss 27761

Arrange Tile | Simply By Nature quick ship

Tile Size | 24x24

94535 Mirror Grey

Coordinating Products
Accord, Amend, Array Tile, Offset Tile, Structure Tile

Product Specifications

Style Number	5T294	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4760 ozs./yd³	8.75 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	


Reflection 94323

Mountain View 94326

Glassy Green 94335


Shimmery Blue 94485


Blue Belle 94486

Glossy Charcoal 94505

Sterling Sliver 94515

Steel Grey 94530


Mirror Grey 94535


Polished Stone 94557


Golden Gate 94668


Metallic Beige 94760


Shiny Pebble 94761


Chrome Black 94500

Array Tile | Simply By Nature quick ship

Tile Size | 24x24

94535 Mirror Grey

Product Specifications

Style Number	5T295	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4431 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

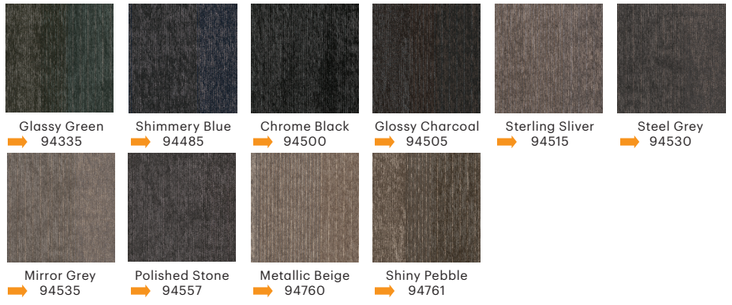

Glassy Green 94335 | Shimmery Blue 94485 | Chrome Black 94500 | Glossy Charcoal 94505 | Sterling Sliver 94515 | Steel Grey 94530

Mirror Grey 94535 | Polished Stone 94557 | Metallic Beige 94760 | Shiny Pebble 94761

Coordinating Products
Arrange Tile, Offset Tile, Structure Tile

Balcony Tile | Canopy quick ship

Tile Size | 24x24

88760 Branch

Product Specifications

Style Number	5T389	
Fibre	EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5942 ozs./yd³	9.69 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

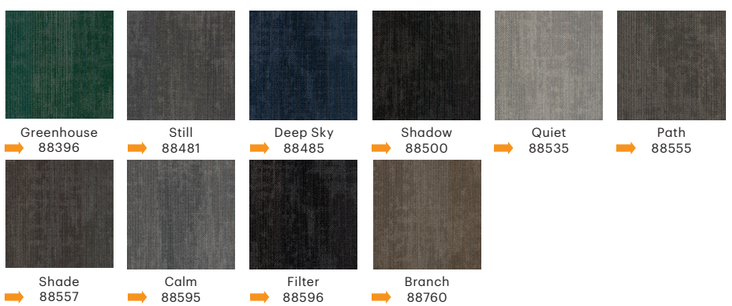

Greenhouse 88396 | Still 88481 | Deep Sky 88485 | Shadow 88500 | Quiet 88535 | Path 88555

Shade 88557 | Calm 88595 | Filter 88596 | Branch 88760

Coordinating Products
Ground, Below, Elevate Tile, Habitat Tile, Suspend Tile, Above Tile, Preserve Tile, Weathered Tile, Wildwood Tile, Weathered Color Tile

Basic Tile | Space Worx quick ship

Tile Size | 24x24

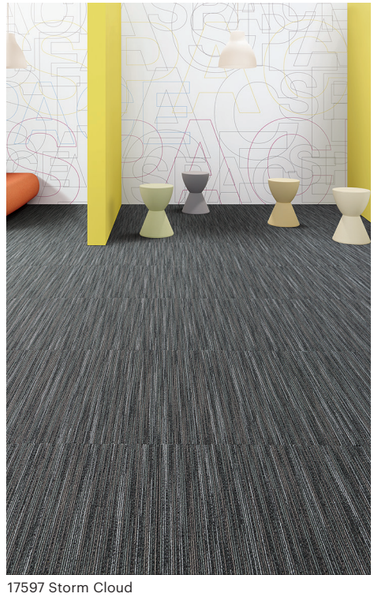

17597 Storm Cloud

Product Specifications

Style Number	5T121	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	13 oz.	440.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4457 ozs./yd³	7.57 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

Blue Herring 17481 | Denim 17496 | Brown Bark 17500 | Raven 17505 | Limestone 17530 | Dove Grey 17557

Storm Cloud 17597 | Slate 17760 | Khaki 17761

Coordinating Products
Centric Tile, Primary Tile, Surround Tile

Belong Tile | Kindred quick ship

Tile Size | 24x24

48515 Hearten + 48486 Serene

Product Specifications

Style Number	5T261	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	18 oz.	610.2 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8640 ozs./yd³	10.94 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

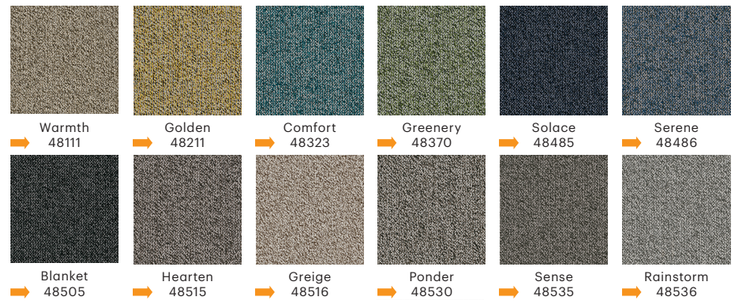

Warmth 48111 | Golden 48211 | Comfort 48323 | Greenery 48370 | Solace 48485 | Serene 48486

Blanket 48505 | Hearten 48515 | Greige 48516 | Ponder 48530 | Sense 48535 | Rainstorm 48536

Slate 48557 | Nestle 48760 | Fire 48856 | Insight 48979

Bisect Tile | Floor Architecture quick ship

Tile Size | 9x36

06518 Silt

Coordinating Products
Landform Tile, Ridge Tile, Steppe Tile, Poured Tile, Stacked Tile

Product Specifications

Style Number	5T448	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	8597 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	



Mortar 06530 | River Rock 06481 | Aggregate 06501 | Granite 06500

Boundless Tile | Living Systems quick ship

Tile Size | 9x36

05105 Optimistic + 05761 Mountain

Coordinating Products
Endless Tile, Observe Tile, Observe Color Tile, Respond Tile, Respond Color Tile, Source Tile, Transform Color Tile, Transform Tile

Product Specifications

Style Number	5T314	
Fibre	EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	567.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	7373 ozs./yd³	8.47 kilotex
Product Size	9 in x 36 in	22.86 cm x 91.44 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Brick, Herringbone, Ashlar, Stagger	

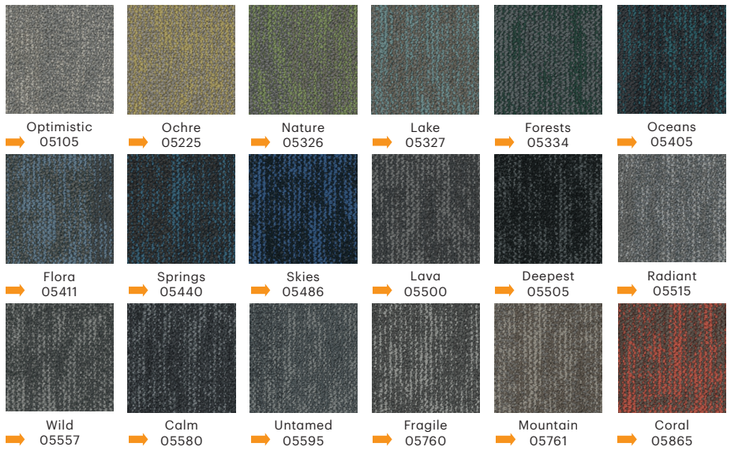

Optimistic 05105 | Ochre 05225 | Nature 05326 | Lake 05327 | Forests 05334 | Oceans 05405

Flora 05411 | Springs 05440 | Skies 05486 | Lava 05500 | Deepest 05505 | Radiant 05515

Wild 05557 | Calm 05580 | Untamed 05595 | Fragile 05760 | Mountain 05761 | Coral 05865

Byline Tile | No Rules quick ship

Tile Size | 24x24

05761 Fuse

Coordinating Products
Linage Tile

Product Specifications

Style Number	59113	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5615 Ozs/yd³	9.32 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	



Crossroads 05309 | Maze 05335 | Timeless 05400 | Labyrinth 05485 | Versatile 05500 | Boundaries 05505

Symbolic 05512 | Element 05601 | Knot 05715 | Wired 05730 | Bridge 05750 | Fuse 05761

Catalyst Tile | Mix quick ship

Tile Size | 24x24

64755 Marble

Coordinating Products
Eclectic, Hybrid Tile, Meld

Product Specifications

Style Number	59579	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5058 ozs./yd³	9.16 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Ashlar, Brick, Monolithic, Quarter Turn, Random	

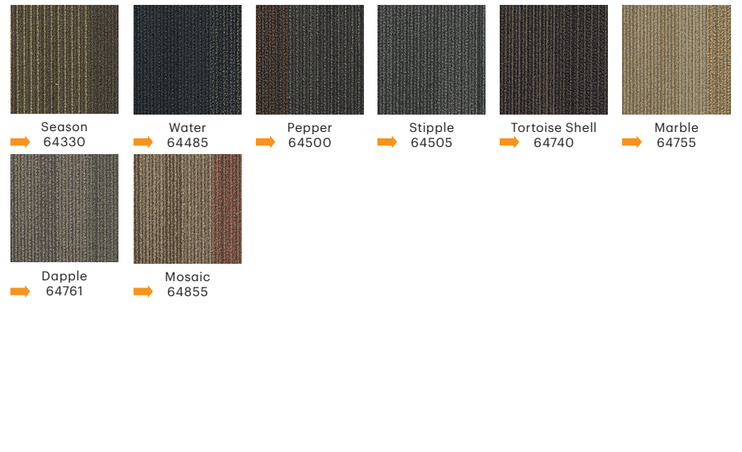

Season 64330 | Water 64485 | Pepper 64500 | Stipple 64505 | Tortoise Shell 64740 | Marble 64755

Dapple 64761 | Mosaic 64855

Central Line Tile | Places quick ship

Tile Size | 9x36

72516 Scenic Citron

Product Specifications

Style Number	5T176	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6581 ozs./yd³	10.12 kilotex
Product Size	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Ashlar, Stagger, Herringbone, Brick	


Adventure Green
72482


Skyline Cyan
72501


Market Red
72506


Scenic Citron
72516


Metro Teal
72531


Ocean Coral
72536


Urban Blue
72558


Island Yellow
72596

Village Azure
72759

Earthy Orange
72762

Coordinating Products
Birch, City Central Tile, Grove, Sea Edge Tile, Sea Tile, Sky Tile, Summit

Centric Tile | Space Worx quick ship

Tile Size | 24x24

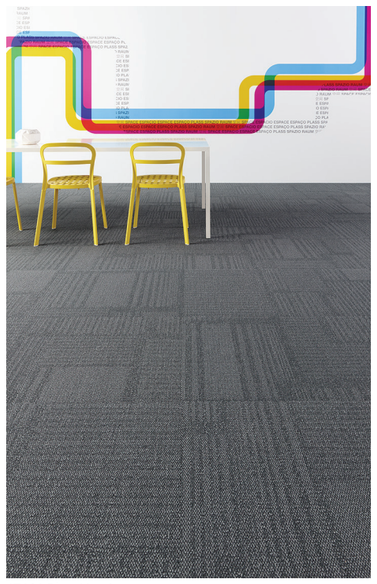

17481 Blue Herring

Product Specifications

Style Number	5T124	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6353 ozs./yd³	9.27 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	


Blue Herring
17481

Denim
17496

Brown Bark
17500

Raven
17505

Limestone
17530

Dove Grey
17557

Storm Cloud
17597

Slate
17760

Khaki
17761

Coordinating Products
Basic Tile, Primary Tile, Surround Tile

Charisma Tile quick ship

Tile Size | 24x24

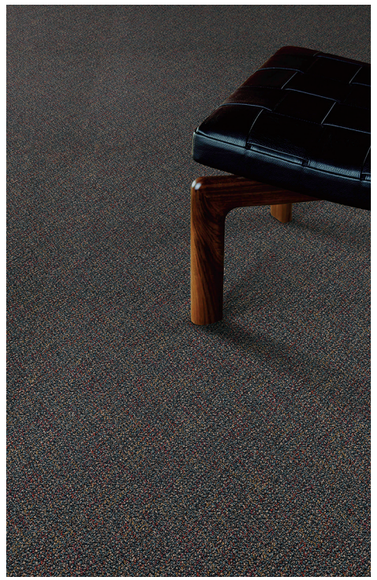

61979 Artistic

Product Specifications

Style Number	59561	
Fibre	EcoSolution Q® Nylon	
Dye Method	74% Solution Dyed / 26% Yarn Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	5/64	50.4/10 cm
Average Density	7402 ozs./yd³	10.10 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn, Monolithic	

Legend
61103

Top Notch
61485

Backdrop
61505

Aristocrat
61750

City Central Tile | Places quick ship

Tile Size | 9x36

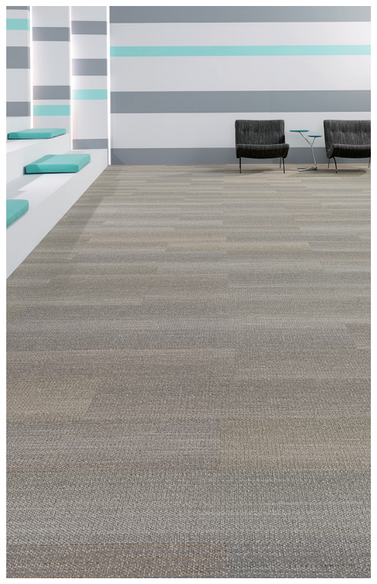

72515 Scenic

Product Specifications

Style Number	5T175	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.40 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6581 ozs./yd³	10.37 kilotex
Product Size	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Ashlar, Stagger, Herringbone, Brick	


Adventure
72481


Skyline
72500


Market
72505

Scenic
72515

Metro
72530

Ocean
72535

Urban
72557


Island
72595

Village
72760

Earthy
72761

Coordinating Products
Birch, City Central Tile, Grove, Sea Edge Tile, Sea Tile, Sky Tile, Summit

Color Play Tile | No Rules quick ship

Tile Size | 24x24

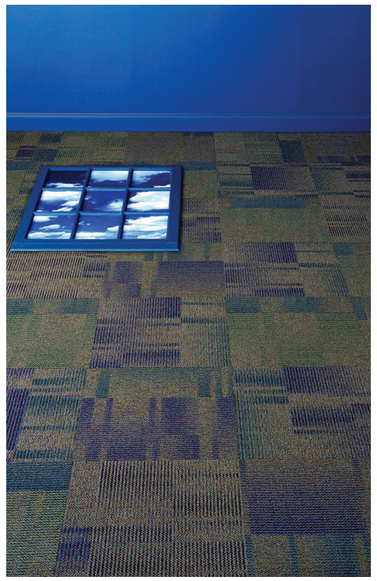

58150 Gilded

Coordinating Products
Kinetic Tile

Product Specifications

Style Number	59358	
Fibre	EcoSolution Q® Nylon	
Dye Method	90% Solution Dyed / 10% Yarn Dyed	
Tufted Weight	18 oz.	610.3 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7624 ozs./yd³	9.52 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Random	


Gilded 58150

Be Jeweled 58485

Metal Guru 58595

Commons Tile | Campus quick ship

Tile Size | 24x24

23515 Chrome

Coordinating Products
Makerspace Tile, Quad Tile

Product Specifications

Style Number	5T323	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6545 ozs./yd³	0.24 g/m³
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	


Verdure 23330


Cyan 23400

Glass 23405


Ink 23486


Steel 23505

Chrome 23515

Plaster 23530


Concrete 23535


Rope 23555


Beam 23580


Metal 23585


Clay 23668

Pigment 23850


Crimson 23856

Companion Tile | In Synce quick ship

Tile Size | 24x24

52515 Fuse

Coordinating Products
Correspond Tile, Partner Tile

Product Specifications

Style Number	5T352	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6353 ozs./yd³	8.48 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	


Fuse 52515

Together 52516

Union 52335


Join 52501

Alike 52557


Equal 52530

Mix 52750


Connect 52531

Duo 52597

Combo 52598

Balanced 52485

Link 52500

Connect Tile | Worklife quick ship

Tile Size | 24x24

40150 Bare Necessities

Coordinating Products
Balance Tile, Emotion Tile, Focus Tile, Simplicity

Product Specifications

Style Number	59342	
Fibre	EcoSolution Q® Nylon	
Dye Method	86% Solution Dyed / 14% Yarn Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5885 ozs./yd³	8.56 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn	


Bare Necessities 40150

Exotic Seasalt 40315


Harbouring Desires 40485


Steeling Beauty 40500

Atmosfera 40760


Ciao Bella 40855

Constellation Tile quick ship

Tile Size | 24x24

26710 Shooting Star

Coordinating Products
Constellation Ultraloc

Product Specifications

Style Number	59326	
Fibre	EcoSolution Q® Nylon	
Dye Method	57% Solution Dyed / 43% Yarn Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8727 ozs./yd³	11.03 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic	

Lunar 26210


Federation 26420


Shooting Star 26710

Correspond Tile | In Synce quick ship

Tile Size | 24x24

52515 Fuse

Coordinating Products
Companion Tile, Partner Tile

Product Specifications

Style Number	5T353	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6853 ozs./yd³	8.47 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Fuse 52515

Together 52516

Union 52335

Join 52501

Alike 52557

Equal 52530

Mix 52750

Connect 52531

Duo 52597

Combo 52598

Balanced 52485

Link 52500

Diffuse Tile | No Rules quick ship

Tile Size | 24x24 | 9x36

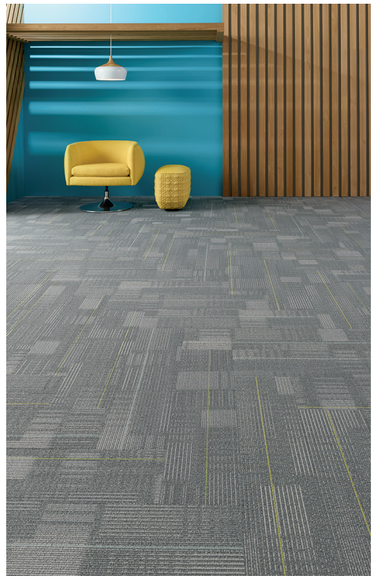

Product Specifications

Style Number	59575 (24 in x 24 in) | 5T185 (9 in x 36 in)	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6261 ozs./yd³	9.23 kilotex
Product Sizes	24 in x 24 in	61 cm x 61 cm
	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®*	
Recommended Installation	Monolithic, Ashlar, Brick, Quarter Turn, Random, Herringbone (9x36 only)	

Road Trip 75105


Annual 75150


Formations 75335


Flyway 75400


Movement 75481

Water Rail 75485

Routes 75500


Magnetic Fields 75505

River Front 75535

Train Station 75557

Passport 75597

Voyage 75715


Southbound 75730

Nomad 75750


Navigation 75760


Flutter 75761


Climate 75765


Seasonal 75979

Diffuse StrataWorx | No Rules

Tile Size | 24x24

75500 Routes

Coordinating Products
Poured Strataworx, Surround Strataworx

Product Specifications

Style Number	5T419	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	543.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6261 ozs./yd³	9.23 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	


Routes 75500


Magnetic Fields 75505

Passport 75597

Flutter 75761

Direction Tile | View quick ship

Tile Size | 24x24

69505 Zone

Coordinating Products
Field Tile, Modify, Realm Tile, Reverse Tile, Scape Tile, Shape Tile, Switch, Transfer

Product Specifications

Style Number	5T071	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5047 ozs./yd³	8.87 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Sight 69111 · Drift 69170 · Flip 69335 · Vista 69481 · Horizon 69496 · Space 69500

Zone 69505 · Gaze 69530 · Outlook 69557 · Distance 69597 · Range 69755 · Area 69761

Disperse Tile | No Rules quick ship

Tile Size | 24x24 | 9x36

75557 Train Station

Coordinating Products
Diffuse Tile

Product Specifications

Style Number	59576 (24 in x 24 in) | 5T184 (9 in x 36 in)	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6128 ozs./yd³	9.24 kilotex
Product Sizes	24 in x 24 in	61 cm x 61 cm
	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Ashlar, Brick, Quarter Turn, Random, Herringbone (9x36 only)	

Road Trip 75105 · Annual 75150 · Formations 75335 · Flyway 75400 · Movement 75481 · Water Rail 75485

Routes 75500 · Magnetic Fields 75505 · River Front 75535 · Train Station 75557 · Passport 75597 · Voyage 75715

Southbound 75730 · Nomad 75750 · Navigation 75760 · Flutter 75761 · Climate 75765 · Seasonal 75979

Dream Tile | Kindred quick ship

Tile Size | 24x24

48211 Golden + 48515 Hearten + 48486 Serene

Coordinating Products
Belong, Memory

Product Specifications

Style Number	5T265	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	19 oz.	644.2 g/m²
Gauge	1/10	39.4/10 cm
Average Density	9000 ozs./yd³	10.00 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Warmth 48111 · Golden 48211 · Comfort 48323 · Greenery 48370 · Solace 48485 · Serene 48486

Blanket 48505 · Hearten 48515 · Greige 48516 · Ponder 48530 · Sense 48535 · Rainstorm 48536

Slate 48557 · Nestle 48760 · Fire 48856 · Insight 48979

Elevate Tile | Canopy quick ship

Tile Size | 24x24

88760 Branch

Coordinating Products
Ground, Below, Balcony Tile, Habitat Tile, Suspend Tile, Above Tile, Preserve Tile, Weathered Tile, Wildwood Tile, Weathered Color Tile

Product Specifications

Style Number	5T388	
Fibre	EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6581 ozs./yd³	9.69 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Greenhouse 88396 · Still 88481 · Deep Sky 88485 · Shadow 88500 · Quiet 88535 · Path 88555

Shade 88557 · Calm 88595 · Filter 88596 · Branch 88760

Embark Tile | Material Matters quick ship

Tile Size | 24x24

37530 Airy

Product Specifications

Style Number	5T040	
Fibre	EcoSolution Q® Nylon	
Dye Method	98% Solution Dyed / 2% Yarn Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5829 ozs./yd³	9.29 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

Whisper* 37111

Lustrous 37170



Poetic 37320

Dreamy 37481



Stardust 37496

Myth* 37505

Delicate 37515

Airy* 37530



Smoke* 37557

Linger* 37750



Notion* 37760



Shadow 37761

Coordinating Products
Fringe Tile, Haze Tile, Vapor Tile, Wander Tile

**Also available as Staticsmart™ ESD*

Engage Tile | Mindful Play quick ship

Tile Size | 24x24

86536 Experience Lime + 86586 Transform Teal

Product Specifications

Style Number	5T187	
Fibre	Solution Q Extreme® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.37/10 cm
Average Density	6063 ozs./yd³	9.26 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Clarity Lime 86111

Clarity Orange 86112



Escape Silver 86505



Escape Blue 86506

Nuance Orange 86515



Nuance Charcoal 86516



Experience Teal 86535



Experience Lime 86536

Transform Red 86585

Transform Teal 86586



Achieve Purple 86760



Achieve Blue 86761

Coordinating Products
Impact Tile, Inspire LVT, Think Tile

Entwine Tile | AlterNATURE quick ship

Tile Size | 24x24

78713 Burl

Product Specifications

Style Number	59337	
Fibre	EcoSolution Q® Nylon	
Dye Method	44% Solution Dyed / 56% Yarn Dyed	
Tufted Weight	32 oz.	1,085 g/m²
Gauge	1/12	47.2/10 cm
Average Density	8170 ozs./yd³	19.91 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	



Linden 78496

Koa 78505

Iroko 78761

Coordinating Products
Core, Earth Tone Tile, Grounded, Ingrain Tile, Natural Selection, Timber

Field Tile | Point Of View quick ship

Tile Size | 24x24

78111 Sight

Product Specifications

Style Number	5T079	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5464 ozs./yd³	9.94 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Sight 78111



Place 78210



Dwell 78326

Survey 78429

Overlook 78436

Space 78500

Domain 78502

Gaze 78530

Distance 78597

Landscape 78675

Area 78761

Glimpse 78855

Coordinating Products
Direction Tile, Modify, Realm Tile, Reverse Tile, Scape Tile, Shape Tile, Switch, Transfer

Glimmer Tile | Bright Work quick ship

Tile Size | 24x24

27585 Gleam

Product Specifications

Style Number	59329	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5276 ozs./yd³	9.50 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

Golden
27150



Flashpoint
27485

Spark
27500

Starlight
27504

Moonlit
27505



Gleam
27585



Bronzed
27750

Afterglow
27755

Gloss
27761

Coordinating Products
Allure Tile, Amplify, Flare, Flicker, Illuminate, Shine Tile

Gradient Tile | Shade quick ship

Tile Size | 24x24

34111 Sandstone

Product Specifications

Style Number	59534	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/8	31.5/10 cm
Average Density	7423 ozs./yd³	11.72 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn*, Monolithic	



Sapphire Blue
*34485

Charcoal
34500

Total Eclipse
34505



Mystique
34590

Coordinating Products
Gradient, Tint, Tone

**Denotes colourways with recommended installation of quarter turn only*

Hybrid Tile | Mix quick ship

Tile Size | 24x24

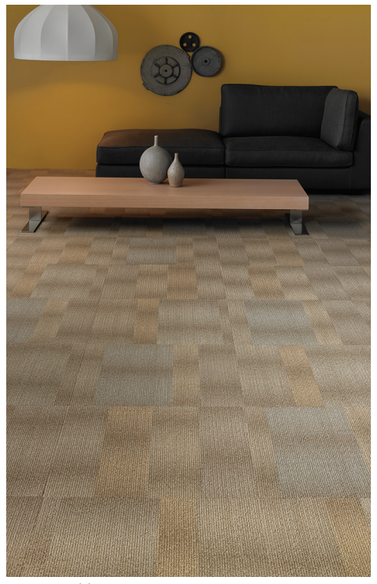

64755 Marble

Product Specifications

Style Number	59580	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.40 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5058 ozs./yd³	9.16 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Ashlar, Brick, Monolithic, Quarter Turn, Random	



Season
64330

Water
64485

Pepper
64500

Stipple
64505

Tortoise Shell
64740

Marble
64755

Dapple
64761



Mosaic
64855

Coordinating Products
Catalyst Tile, Eclectic, Meld

Impact Tile | Mindful Play quick ship

Tile Size | 24x24

86405 Teal

Product Specifications

Style Number	5T188	
Fibre	Solution Q Extreme® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6059 ozs./yd³	9.71 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	



Lime
86325



Teal
86405

Blue
86429

Orange
86668

Red
86855

Purple
86965

Coordinating Products
Engage Tile, Inspire LVT, Think Tile

Infinite Tile | No Rules quick ship

Tile Size | 24x24

09585 Immense

Coordinating Products
Vast Tile

Product Specifications

Style Number	5T010	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6128 ozs./yd³	9.12 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Indefinite 09150

Surround 09330


Boundless 09485

Limitless 09500


Endless 09504

Encompass 09505

Immense 09585

Enfold 09761

Intent Tile | District quick ship

Tile Size | 24x24

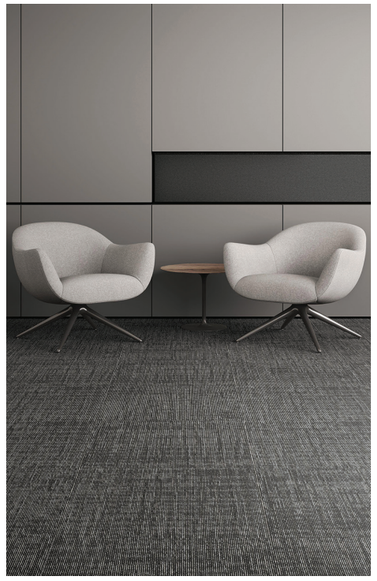

08557 Nocturne

Coordinating Products
Purpose Tile, Situation Tile

Product Specifications

Style Number	5T208	
Fibre	Solution Q Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	14 oz.	474.7 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6000 ozs./yd³	8.23 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx™	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	


Stellar 08505

Skylight 08530

Nocturne 08557

Shale 08597

Woodsmoke 08760

Sierra 08761

Kinetic Tile | No Rules quick ship

Tile Size | 24x24

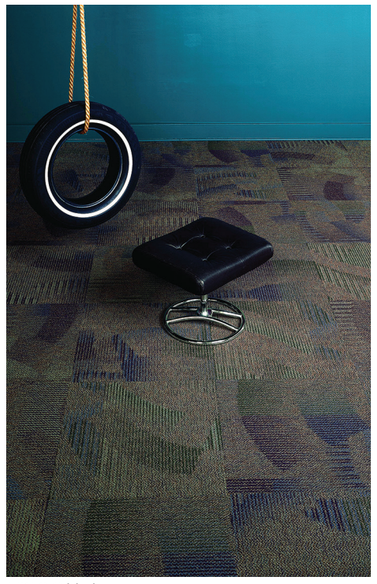

58150 Gilded

Coordinating Products
Blox Tile, Color Play Tile

Product Specifications

Style Number	59359	
Fibre	EcoSolution Q® Nylon	
Dye Method	90% Solution Dyed / 10% Yarn Dyed	
Tufted Weight	18 oz.	610.3 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7624 ozs./yd³	9.36 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Random	

Gilded 58150

Fused Glass 58315

Metal Guru 58595

Landform Tile | Floor Architecture quick ship

Tile Size | 24x24

06518 Silt

Coordinating Products
Bisect Tile, Ridge Tile, Steppe Tile, Poured Tile, Stacked Tile

Product Specifications

Style Number	5T449	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7111 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Mortar 06530

River Rock 06481


Aggregate 06501

Granite 06500

Makerspace Tile | Campus quick ship

Tile Size | 24x24

23400 Laszlo

Coordinating Products
Commons Tile, Quad Tile

Product Specifications

Style Number	5T325	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6545 ozs./yd³	8.99 kilotex
Product Size	24 in x 24 in	61 cm x 61cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Herbert 23330

Laszlo 23400

Otti 23405


Walter 23486

Gunta 23668


Josef 23850

Regina 23856

Memory Tile | Kindred quick ship

Tile Size | 24x24

48515 Hearten

Coordinating Products
Belong, Dream, Reminisce, Stay

Product Specifications

Style Number	5T263	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	19 oz.	644.2 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8047 ozs./yd³	10.86 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Warmth 48111


Golden 48211


Comfort 48323


Greenery 48370


Solace 48485


Serene 48486

Blanket 48505

Hearten 48515

Greige 48516

Ponder 48530

Sense 48535

Rainstorm 48536

Slate 48557


Nestle 48760


Fire 48856


Insight 48979

Minimal Tile | On The Edge quick ship

Tile Size | 18x36

64515 Limit

Coordinating Products
Merge Tile, Vertical Edge Tile

Product Specifications

Style Number	59164	
Fibre	EcoSolution Q® Nylon	
Dye Method	87% Solution Dyed / 13% Yarn Dyed	
Tufted Weight	18 oz.	610.3 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6480 ozs./yd³	11.43 kilotex
Product Size	18 in x 36 in	45.7 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Basketweave, Herringbone, Boxed In, Brick, Half Basketweave	

Margin 64155

Brink 64505


Verge 64555

Fringe 64585

Momentum IV Tile quick ship

Tile Size | 24x24

02305 Potential

Coordinating Products
Momentum IV, Unitary

Product Specifications

Style Number	59502	
Fibre	Solution Q Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6923 ozs./yd³	11.32 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic	

Tempo 02205

Friction 02211


Bowled Over 02304

Potential 02305

Evolve 02312


Hustle 02323


Impulse 02405


Emerge 02413


Animate 02422

Rhythm 02505

Velocity 02512

Space Walk 02513

Rustle 02605

Vigor 02705


Advancement 02711


Psyched Out 02715

Timbre 02721


Metropolis 02812

Offset Tile | Simply By Nature quick ship

Tile Size | 24x24

94535 Mirror Grey

Product Specifications

Style Number	5T296	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4500 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Glassy Green
94335



Shimmery Blue
94485

Chrome Black
94500

Glossy Charcoal
94505

Sterling Sliver
94515

Steel Grey
94530

Mirror Grey
94535

Polished Stone
94557

Metallic Beige
94760

Shiny Pebble
94761

Coordinating Products
Arrange Tile, Array Tile, Structure Tile

Partner Tile | In Sync quick ship

Tile Size | 24x24

52515 Fuse

Product Specifications

Style Number	5T354	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6136 ozs./yd³	8.46 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Fuse
52515



Together
52516

Union
52335

Join
52501

Alike
52557

Equal
52530

Mix
52750

Connect
52531

Duo
52597

Combo
52598

Balanced
52485

Link
52500

Coordinating Products
Companion Tile, Correspond Tile

Path Tile | All Access quick ship

Tile Size | 24x24

34761 Portabella

Product Specifications

Style Number	5T034	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	8765 ozs./yd³	16.03 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	



Multicolor
34481



Navy
34485



Ebony
34500

Lava
34549

Sterling
34557

Suede
34740

Black Chocolate
34751

Portabella
34761

Dark Red
34851

Portal Tile | All Access quick ship

Tile Size | 24x24

34500 Ebony

Product Specifications

Style Number	5T035	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7814 ozs./yd³	15.98 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	



Multicolour
34481



Navy
34485

Ebony
34500

Lava
34549



Sterling
34557

Suede
34740

Black Chocolate
34751

Portabella
34761



Dark Red
34851

Coordinating Products
Path Tile

Poured Tile | Floor Architecture quick ship

Tile Size | 24x24

06530 Mortar

Coordinating Products
Stacked Tile

Product Specifications

Style Number	5T206	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7385 ozs./yd³	9.34 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Sandstone 06111 · Aquamarine 06327 · Emerald 06335 · River Rock 06481 · Lapis 06486 · Granite 06500

Aggregate 06501 · Flagstone 06505 · Gypsum 06515 · Mortar 06530 · Limestone 06535 · Shale 06557

Mineral 06595 · Mix 06597 · Pebble 06760 · Concrete 06761

Poured StrataWorx | No Rules quick ship

Tile Size | 24x24

06481 River Rock

Coordinating Products
Diffuse Strataworx, Surround Strataworx

Product Specifications

Style Number	5T420	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7385 ozs./yd³	9.34 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

River Rock 06481 · Granite 06500 · Aggregate 06501 · Mortar 06530

Primary Tile | Space Worx quick ship

Tile Size | 24x24

17597 Storm Cloud

Coordinating Products
Basic Tile, Centric Tile, Surround Tile

Product Specifications

Style Number	5T123	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	13 oz.	440.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4875 ozs./yd³	7.51 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

Blue Herring 17481 · Denim 17496 · Brown Bark 17500 · Raven 17505 · Limestone 17530 · Dove Grey 17557

Storm Cloud 17597 · Slate 17760 · Khaki 17761

Purpose Tile | District quick ship

Tile Size | 24x24

08557 Nocturne

Coordinating Products
Intent Tile, Situation Tile

Product Specifications

Style Number	5T209	
Fibre	Solution Q Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	14 oz.	474.7 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5040 ozs./yd³	8.13 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx™	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Stellar 08505 · Skylight 08530 · Nocturne 08557 · Shale 08597 · Woodsmoke 08760 · Sierra 08761

Quad Tile | Campus quick ship

Tile Size | 24x24

23515 Cyan Chrome

Product Specifications

Style Number	5T324	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6194 ozs./yd³	8.68 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

Ink Steel
23505

Cyan Chrome
23515

Clay Plaster
23530

Glass Concrete
23535

Crimson Rope
23555



Verdure Metal
23585



Pigment Beam
23580

Coordinating Products
Commons Tile, Makerspace Tile

Radiance Tile | Feeling Plush quick ship

Tile Size | 24x24

60755 Natural Tonic

Product Specifications

Style Number	59361	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	30 oz.	1,017.2 g/m²
Gauge	1/12	47.2/10 cm
Average Density	9076 ozs./yd³	13.45 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar	



Black Cashmere
60505

Natural Tonic
60755

Coordinating Products
Glitz Tile, Glow

Realm Tile | View quick ship

Tile Size | 24x24

78111 Sight

Product Specifications

Style Number	5T078	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	4721 ozs./yd³	9.12 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Sight
78111

Place
78210

Dwell
78326



Survey
78429

Overlook
78436



Space
78500

Domain
78502

Gaze
78530



Distance
78597

Landscape
78675

Area
78761

Glimpse
78855

Repartee Tile quick ship

Tile Size | 24x24

87750 Word Play

Product Specifications

Style Number	59387	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8703 ozs./yd³	14.13 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn, Ashlar	

Witty Reply
87500

Evening Satire
87505

Reverse Tile | View quick ship

Tile Size | 24x24

69505 Zone

Product Specifications

Style Number	5T069	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5684 ozs./yd³	8.7 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

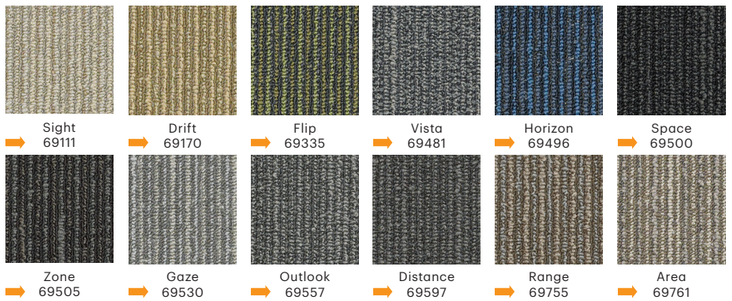

Sight 69111 | Drift 69170 | Flip 69335 | Vista 69481 | Horizon 69496 | Space 69500

Zone 69505 | Gaze 69530 | Outlook 69557 | Distance 69597 | Range 69755 | Area 69761

Coordinating Products
Direction Tile, Field Tile, Modify, Realm Tile, Scape Tile, Shape Tile, Switch, Transfer

Ridge Tile | Floor Architecture quick ship

Tile Size | 24x24

06518 Silt

Product Specifications

Style Number	5T446	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	9143 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	



Mortar 06530 | River Rock 06481 | Aggregate 06501 | Granite 06500

Coordinating Products
Bisect Tile, Landform Tile, Steppe Tile, Poured Tile, Stacked Tile

Scape Tile | View quick ship

Tile Size | 24x24

7811 Sight

Product Specifications

Style Number	5T080	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	4721 ozs./yd³	9.12 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

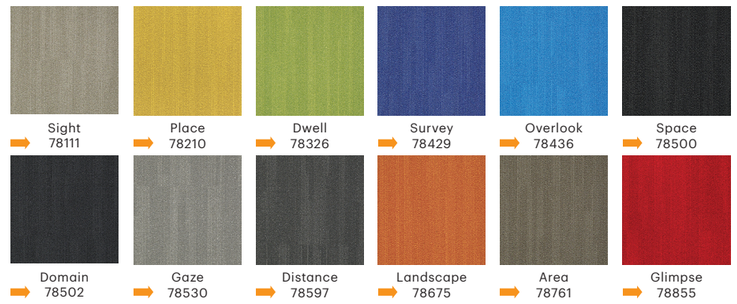

Sight 78111 | Place 78210 | Dwell 78326 | Survey 78429 | Overlook 78436 | Space 78500

Domain 78502 | Gaze 78530 | Distance 78597 | Landscape 78675 | Area 78761 | Glimpse 78855

Coordinating Products
Direction Tile, Field Tile, Modify, Realm Tile, Reverse Tile, Switch, Shape Tile, Transfer

Sculpt Tile | Rewoven quick ship

Tile Size | 24x24

83761 Clay

Product Specifications

Style Number	5T007	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5581 ozs./yd³	11.84 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	



Zinc 83515 | Carbon 83585 | Clay 83761

Coordinating Products
Align Tile, Contour, Dimension, Layer, Outline, Sculpt Loop Tile, Trace Tile

Sea Edge Tile | Places quick ship

Tile Size | 24x24

72536 Ocean Coral

Product Specifications

Style Number	5T173	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7116 ozs./yd³	9.45 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

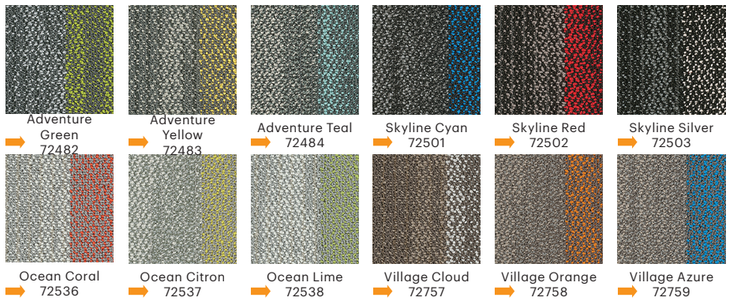

Adventure Green 72482
Adventure Yellow 72483
Adventure Teal 72484
Skyline Cyan 72501
Skyline Red 72502
Skyline Silver 72503
Ocean Coral 72536
Ocean Citron 72537
Ocean Lime 72538
Village Cloud 72757
Village Orange 72758
Village Azure 72759

Coordinating Products
Central Line Tile, City Central Tile, Sea Tile, Sky Tile, Summit, Grove, Birch

Sea Tile | Places quick ship

Tile Size | 24x24

72535 Ocean

Product Specifications

Style Number	5T172	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7948 ozs./yd³	9.44 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

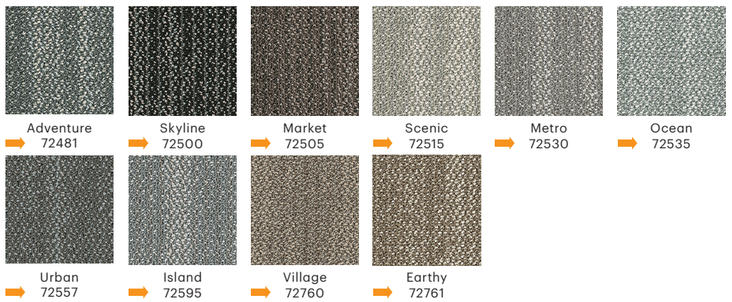

Adventure 72481
Skyline 72500
Market 72505
Scenic 72515
Metro 72530
Ocean 72535
Urban 72557
Island 72595
Village 72760
Earthy 72761

Coordinating Products
Central Line Tile, City Central Tile, Sea Edge Tile, Sky Tile

Shape Tile | View quick ship

Tile Size | 24x24

69505 Zone

Product Specifications

Style Number	5T070	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5192 ozs./yd³	8.88 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

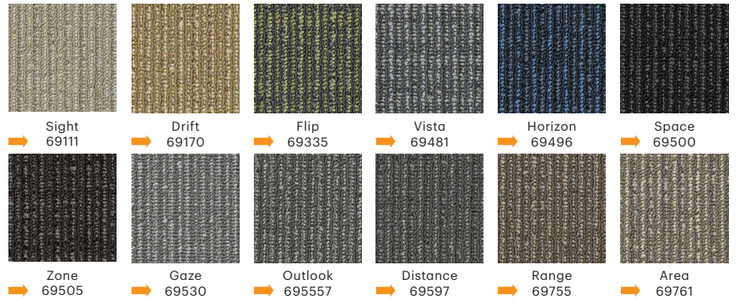

Sight 69111
Drift 69170
Flip 69335
Vista 69481
Horizon 69496
Space 69500
Zone 69505
Gaze 69530
Outlook 695557
Distance 69597
Range 69755
Area 69761

Coordinating Products
Direction Tile, Field Tile, Modify, Realm Tile, Reverse Tile, Scape Tile, Switch, Transfer

Shine Tile | Bright Work quick ship

Tile Size | 24x24

27585 Gleam

Product Specifications

Style Number	59328	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5276 ozs./yd³	9.50 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	

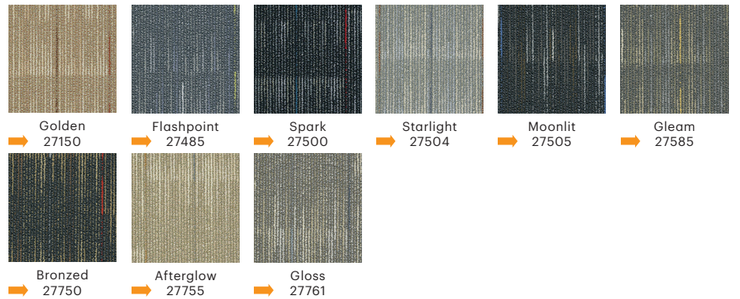

Golden 27150
Flashpoint 27485
Spark 27500
Starlight 27504
Moonlit 27505
Gleam 27585
Bronzed 27750
Afterglow 27755
Gloss 27761

Coordinating Products
Allure Tile, Amplify, Flare, Flicker, Glimmer Tile, Illuminate

Situation Tile | District quick ship

Tile Size | 24x24

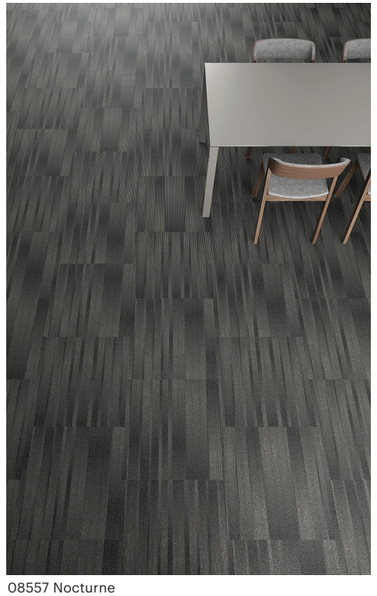

08557 Nocturne

Coordinating Products
Intent Tile, Purpose Tile

Product Specifications

Style Number	5T210	
Fibre	Solution Q Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	14 oz.	474.7 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5091 ozs./yd³	8.13 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx™	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	



Stellar 08505 | Skylight 08530 | Nocturne 08557 | Shale 08597 | Woodsmoke 08760 | Sierra 08761

Sky Tile | Places quick ship

Tile Size | 24x24

72481 Adventure

Coordinating Products
Central Line Tile, City Central Tile, Sea Edge Tile, Sea Tile, Summit, Grove

Product Specifications

Style Number	5T174	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6876 ozs./yd³	9.61 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

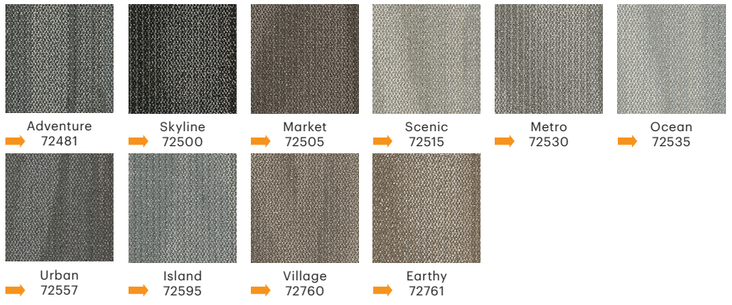

Adventure 72481 | Skyline 72500 | Market 72505 | Scenic 72515 | Metro 72530 | Ocean 72535

Urban 72557 | Island 72595 | Village 72760 | Earthy 72761

Source Tile | Living Systems quick ship

Tile Size | 9x36

05105 Optimistic + 05761 Mountain

Coordinating Products
Boundless Tile, Observe Tile, Observe Color Tile, Respond Tile, Respond Color Tile, Source Tile, Transform Color Tile, Transform Tile

Product Specifications

Style Number	5T315	
Fibre	EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	567.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	9000 ozs./yd³	7.33 kilotex
Product Size	9 in x 36 in	22.86 cm x 91.44 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Brick, Herringbone, Ashlar, Stagger	



Optimistic 05105 | Ochre 05225 | Nature 05326 | Lake 05327 | Forests 05334 | Oceans 05405

Flora 05411 | Springs 05440 | Skies 05486 | Lava 05500 | Deepest 05505 | Radiant 05515

Wild 05557 | Calm 05580 | Untamed 05595 | Fragile 05760 | Mountain 05761 | Coral 05865

Stacked Tile | Floor Architecture quick ship

Tile Size | 24x24

06481 River Rock

Coordinating Products
Poured Tile

Product Specifications

Style Number	5T207	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	8113 ozs./yd³	9.15 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

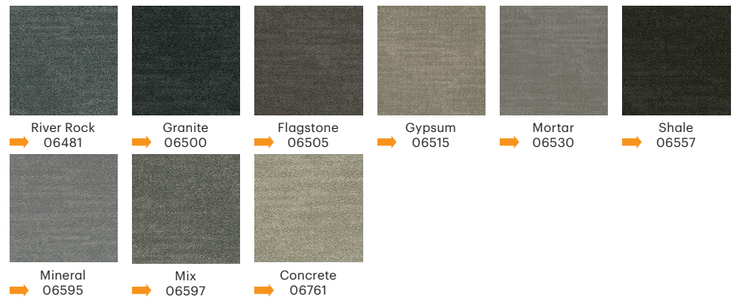

River Rock 06481 | Granite 06500 | Flagstone 06505 | Gypsum 06515 | Mortar 06530 | Shale 06557

Mineral 06595 | Mix 06597 | Concrete 06761

Steppe Tile | Floor Architecture quick ship

Tile Size | 24x24

06518 Silt

Product Specifications

Style Number	5T447	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	8113 ozs./yd³	8.78 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	



Mortar 06530 | River Rock 06481 | Aggregate 06501 | Granite 06500

Coordinating Products
Bisect Tile, Landform Tile, Ridge Tile, Poured Tile, Stacked Tile

Structure Tile | Simply By Nature quick ship

Tile Size | 24x24

94535 Mirror Grey

Product Specifications

Style Number	5T297	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	4760 ozs./yd³	8.76 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	StrataWorx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

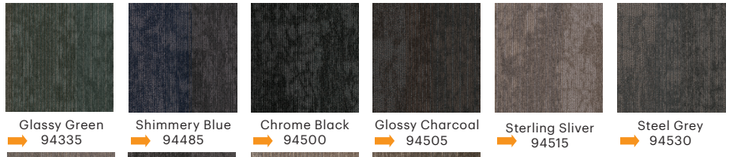

Glassy Green 94335 | Shimmery Blue 94485 | Chrome Black 94500 | Glossy Charcoal 94505 | Sterling Sliver 94515 | Steel Grey 94530



Mirror Grey 94535 | Polished Stone 94557 | Metallic Beige 94760 | Shiny Pebble 94761

Coordinating Products
Accord, Amend, Arrange Tile, Array Tile, Offset Tile

Surround Tile | Space Worx quick ship

Tile Size | 24x24

17481 Blue Herring

Product Specifications

Style Number	5T125	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6429 ozs./yd³	9.27 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Blue Herring 17481 | Denim 17496 | Brown Bark 17500 | Raven 17505 | Limestone 17530 | Dove Grey 17557

Storm Cloud 17597 | Slate 17760 | Khaki 17761

Coordinating Products
Basic Tile, Centric Tile, Primary Tile

Surround StrataWorx | No Rules quick ship

Tile Size | 24x24

17530 Limestone

Product Specifications

Style Number	5T421	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6429 ozs./yd³	9.27 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Strataworx® Tile	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	



Blue Herring 17481 | Denim 17496 | Limestone 17530 | Storm Cloud 17597

Coordinating Products
Diffuse Strataworx, Poured Strataworx

Suspend Tile | Canopy quick ship

Tile Size | 9x36

Carbon Neutral
Low Embodied Carbon

88481 Still

Coordinating Products
Above Tile, Habitat Tile, Below Broadloom, Ground Broadloom

Product Specifications

Style Number	5T391	
Fibre	EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	19 oz.	644.2 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5700 ozs./yd³	10.25 kilotex
Product Size	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Ashlar, Brick, Herringbone, Stagger	

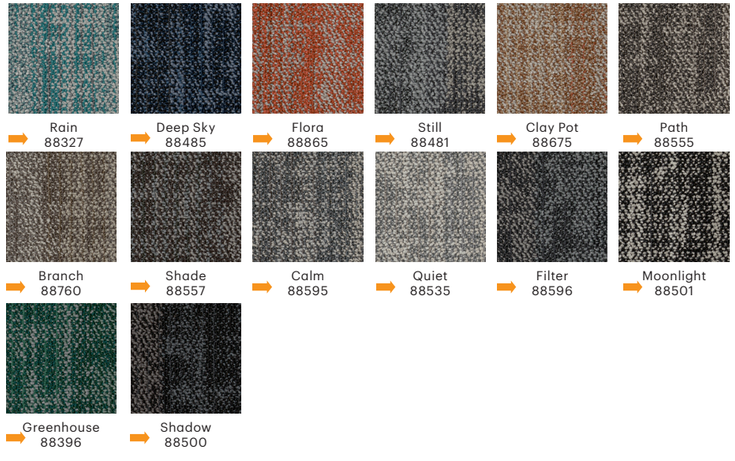

Rain 88327 · Deep Sky 88485 · Flora 88865 · Still 88481 · Clay Pot 88675 · Path 88555
Branch 88760 · Shade 88557 · Calm 88595 · Quiet 88535 · Filter 88596 · Moonlight 88501
Greenhouse 88396 · Shadow 88500

Tangle Tile | No Rules quick ship

Tile Size | 24x24

18761 Wave

Coordinating Products
Tempt Tile

**Also available as Staticsmart™ ESD*

Product Specifications

Style Number	5T018	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5053 ozs./yd³	8.94 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

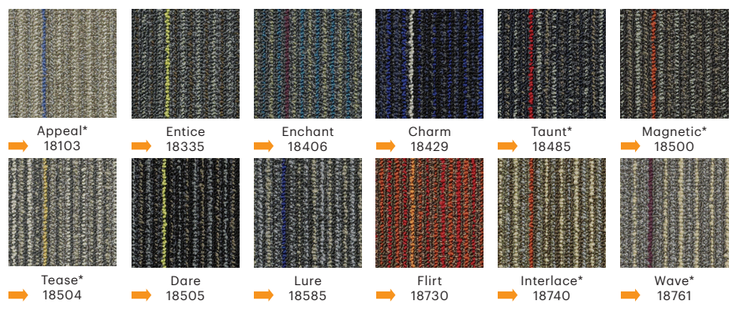

Appeal* 18103 · Entice 18335 · Enchant 18406 · Charm 18429 · Taunt* 18485 · Magnetic* 18500
Tease* 18504 · Dare 18505 · Lure 18585 · Flirt 18730 · Interlace* 18740 · Wave* 18761

Tempt Tile | No Rules quick ship

Tile Size | 24x24

18585 Lure

Coordinating Products
Tangle Tile

**Also available as Staticsmart™ ESD*

Product Specifications

Style Number	5T019	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5053 ozs./yd³	9.12 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn, Random, Monolithic, Brick, Ashlar	

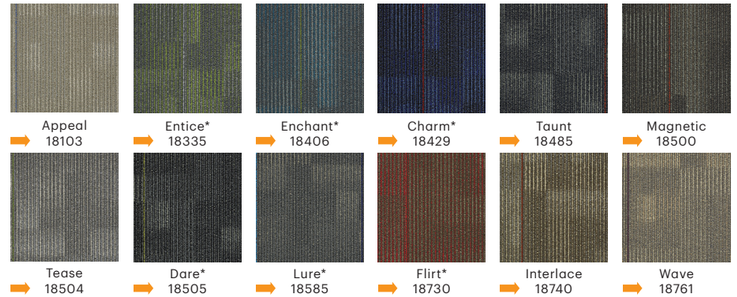

Appeal 18103 · Entice* 18335 · Enchant* 18406 · Charm* 18429 · Taunt 18485 · Magnetic 18500
Tease 18504 · Dare* 18505 · Lure* 18585 · Flirt* 18730 · Interlace 18740 · Wave 18761

Think Tile | Mindful Play quick ship

Tile Size | 24x24

86535 Experience

Coordinating Products
Engage Tile, Impact Tile

Product Specifications

Style Number	5T186	
Fibre	Solution Q Extreme® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6063 ozs./yd³	9.26 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

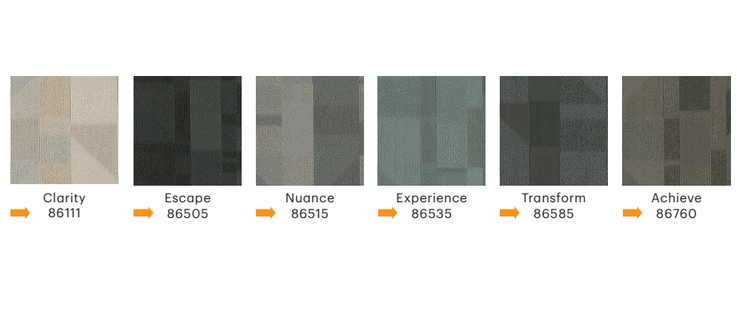

Clarity 86111 · Escape 86505 · Nuance 86515 · Experience 86535 · Transform 86585 · Achieve 86760

Tinge Tile | Vertical Layers quick ship

Tile Size | 9x36

56516 Burnished Pewter

Coordinating Products
Expose Tile, Relief Tile, Uncover Tile, Undertone Tile, Unveil LVT

Product Specifications

Style Number	5T156	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6652 ozs./yd³	8.53 kilotex
Product Size	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Herringbone, Ashlar, Brick, Monolithic	

Weathered Birch
56112


Industrial Concrete
56482


Ferric Metal
56483


Oxidized Iron
56506

Blackened Iron
56508


Burnished Pewter
56516

Patina Steel
56536

Tarnished Alum
56761

Transparent Tile | Clearview quick ship

Tile Size | 24x24

62103 Porcelain

Coordinating Products
Clear Tile, Glaze Tile

**Also available as Staticsmart™ ESD*

Product Specifications

Style Number	59563	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	15 oz.	508.6 g/m²
Gauge	1/12	47.2/10 cm
Average Density	4500 ozs./yd³	8.35 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn, Monolithic, Ashlar, Brick	

Porcelain
62103

Blue Moon*
62486

Moonstone*
62500

Oxide*
62505

Sea Glass*
62560

Earthenware
62750

Pottery*
62755

Tru Colours Tile quick ship

Tile Size | 24x24

Product Specifications

Style Number	59368	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	30 oz.	1,017.2 g/m²
Gauge	1/10	39.4/10 cm
Average Density	11,613 ozs./yd³	16.04 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Quarter Turn	

Tobacco
68150

Portabella
68761


Crimson
68802

Eggplant
68990

Undertone Tile | Vertical Layers quick ship

Tile Size | 9x36

57515 Past

Coordinating Products
Expose Tile, Relief Tile, Tinge Tile, Uncover Tile, Unveil LVT

Product Specifications

Style Number	5T157	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6652 ozs./yd³	8.35 kilotex
Product Size	9 in x 36 in	22.9 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Herringbone, Ashlar, Brick	

Natural
57103

Veil
57111

Awash
57113


Time
57481


Era
57505

Matte
57507

Past
57515

Torn
57531

Plaster
57535

Tarnish
57556

Vintage
57595


Lath
57760

Vast Tile | No Rules quick ship

Tile Size | 24x24

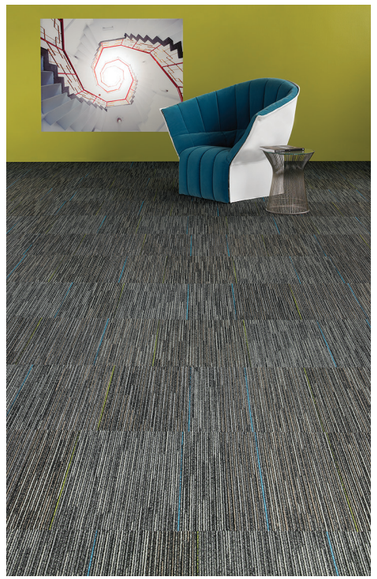

09505 Encompass

Product Specifications

Style Number	5T009	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6128 ozs./yd³	9.12 kilotex
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick, Random	

Indefinite
09150



Surround
09330

Boundless
09485

Limitless
09500

Endless
09504



Encompass
09505



Immense
09585

Enfold
09761

Coordinating Products
Infinite Tile

Vertical Edge Tile | On The Edge quick ship

Tile Size | 18x36

67155 Oatmeal Margin

Product Specifications

Style Number	59114	
Fibre	EcoSolution Q® Nylon	
Dye Method	92% Solution Dyed / 8% Yarn Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6712 ozs./yd³	12.99 kilotex
Product Size	18 in x 36 in	45.7 cm x 91.4 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Basketweave, Herringbone, Boxed In, Brick, Half Basketweave	

Oatmeal Margin
67155

Navy Brink
67506

Gunmetal Verge
67555



Shimmer Fringe
67585



Brite Green Fringe
67586

Coordinating Products
Merge Tile, Minimal Tile

Wander Tile | Material Matters quick ship

Tile Size | 24x24

37530 Airy

Product Specifications

Style Number	5T039	
Fibre	EcoSolution Q® Nylon	
Dye Method	98% Solution Dyed / 2% Yarn Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6000 ozs./yd³	9.17 kilotex
Product Size	24 in X24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended Installation	Monolithic, Quarter Turn, Ashlar, Brick	



Whisper
37111

Lustrous
37170



Poetic
37320

Dreamy
37481



Stardust
37496



Myth
37505



Delicate
37515



Airy
37530



Smoke
37557



Linger
37750



Notion
37760



Shadow
37761

Coordinating Products
Embark Tile, Fringe Tile, Haze Tile, Vapor Tile

Accomplish | Abundant Life II quick ship **

Broadloom

27251 Attain

Product Specifications

Style Number	60727	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/8	31.5/10 cm
Average Density	4383 ozs./yd³	7.45 kilotex
Pattern Repeat	.5 in x .41 in	1.27 cm x 1.04 cm
Secondary Backing *	EcoWorx® Performance Broadloom	
	**Also available with ClassicBac® -60728*	

Dream
27150

Reach
27151

Sustain
27250

Attain
27251

Achieve
27350

Secure
27751

Coordinating Products
Imagery, Impression, Sentiment, Villa, Brush LVT,
Native Origins LVT, Terrain LVT, Uncommon Ground LVT

***Quick Ship available for orders up to 600 yds on EcoWorx® performance broadloom backing only.*

Amend | Simply By Nature quick ship

Broadloom

94535 Mirror Grey

Coordinating Products
Accord, Arrange Tile, Array Tile, Offset Tile,
Structure Tile

Product Specifications

Style Number	5A252	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5703 ozs./yd³	8.27 kilotex
Pattern Repeat	24 in x 24 in	60.96 cm x 60.96 cm
Secondary Backing	ClassicBac®	

Glassy Green
94335

Shimmery Blue
94485

Chrome Black
94500

Glossy Charcoal
94505

Sterling Silver
94515

Steel Grey
94530



Mirror Grey
94535



Polished Stone
94557

Metallic Beige
94760

Shiny Pebble
94761

Amplify | Bright Work quick ship

Broadloom

27504 Starlight

Product Specifications

Style Number	5A176	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6769 ozs./yd³	11.47 kilotex
Pattern Repeat	24 in x 2 ft 6 in	60.96 cm x 76.2 cm
Secondary Backing	Ultraloc®	



Golden 27150 | Flashpoint 27485 | Spark 27500 | Starlight 27504 | Moonlit 27505 | Gleam 27585

Bronzed 27750 | Afterglow 27755 | Gloss 27761

Coordinating Products
Allure Tile, Flare, Flicker, Glimmer Tile, Illuminate, Shine Tile

Below | Canopy quick ship

Broadloom

90761 Branch

Product Specifications

Style Number	5A290	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	745.9 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5617 ozs./yd³	9.93 kilotex
Pattern Repeat	12 in x 16 in	30.48 cm x 40.64 cm
Secondary Backing	Ultraloc®	

Quiet 90535 | Branch 90761 | Calm 90959 | Path 90555 | Still 90481 | Shade 90557



Deep Sky 90485 | Shadow 90500

Coordinating Products
Above Tile, Habitat Tile, Suspend Tile, Ground Broadloom

Birch | Places quick ship

Broadloom

72760 Village

Product Specifications

Style Number	5A235	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7266 ozs./yd³	12.36 kilotex
Pattern Repeat	24 in x 24 in	60.96 cm x 60.96 cm
Secondary Backing	ClassicBac®	

Skyline 72500 | Market 72505 | Scenic 72515 | Metro 72530 | Ocean 72535 | Urban 72557

Island 72595 | Village 72760 | Earthy 72761

Coordinating Products
Central Line Tile, City Central Tile, Grove, Sea Tile, Sea Edge Tile, Sky Tile, Summit

Constellation quick ship

Broadloom

26710 Shooting Star

Product Specifications

Style Number	60550	
Fibre	EcoSolution Q® Nylon	
Dye Method	70% Solution Dyed / 30% Yarn Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	7800 ozs./yd³	11.84 kilotex
Pattern Repeat	.41 in x 6.91 in	1.04 cm x 17.55 cm
Secondary Backing	Ultraloc®	



Lunar 26210 | Federation 26420 | Shooting Star 26710

Contour | Rewoven quick ship — Broadloom

86515 Zinc

Coordinating Products
Align Tile, Dimension, Layer, Outilne, Sculpt Tile, Sculpt Loop Tile, Trace Tile

Product Specifications

Style Number	5A186	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6646 ozs./yd³	13.13 kilotex
Pattern Repeat	3.6 in x 4.75 in	9.14 cm x 12.07 cm
Secondary Backing	ClassicBac®	



Bisque 86111 · Swept 86322 · Night 86496 · Underground 86505 · Zinc 86515 · Carbon 86585

Canyon 86750 · Suede 86755 · Clay 86761

Design Series V quick ship — Broadloom

32325 Elephant

Product Specifications

Style Number	5A032	
Fibre	Nylon	
Dye Method	100% Piece Dyed	
Tufted Weight *	30 oz.	1,017.2 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5373 ozs./yd³	8.32 kilotex
Pattern Repeat	None	
Secondary Backing	ClassicBac®	

**Also Available in 36 oz. 5A033*

Pale 32100 · Twill 32110 · Vanilla 32115 · Parchment 32120 · White Light 32142 · Software 32153

Insert 32155 · Ciao Bella 32156 · Bare Necessities 32157 · Sandalwood 32207 · Glow 32220 · Linen 32243

Foliage 32314 · Splash 32315 · Exotic Seasalt 32322 · Elephant 32325 · Envy 32340 · North Sea 32343 · View 32344 · Willow 32356 · Wireless 32366

Fennel 32370 · Spectrum 32461 · Matrix 32462 · Chip 32464 · Net 32465 · Deep 32490 · Video Port 32491 · Dusk 32496 · Shadow 32500

Breeze 32505 · Micro 32510 · Atmosfera 32521 · Steeling Beauty 32524 · Modem 32544 · Heavy Metal 32545 · Toggle 32546 · Macro 32583 · Escape 32591

Edit 32592 · Mouse 32595 · Latte 32705 · Fine Clay 32708 · Wenge 32710 · Bleached Leather 32713 · Saddle 32721 · Lava 32725 · Double Expresso 32731

Vapor 32742 · Birch 32755 · Wine 32843 · Mirage 32844 · Encrypt 32845 · Barberry 32846 · Crushed Berry 32883 · Accelerator 32891 · Shale 32904

Cybernaut 32940 · Aura 32944 · Beta 32992

Divide | Turn-Key quick ship — Broadloom

65103 Down To Earth

Product Specifications

Style Number	5A065	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6832 ozs./yd³	14.88 kilotex
Pattern Repeat	1 in x 2.2 in	2.54 cm x 5.59 cm
Secondary Backing	ClassicBac®	

Down To Earth
65103

Sweetgrass
65300


Urban Jungle
65309

Raw Denim
65485

Calculate
65500

Sheer Magnetic
65504

Cast Iron
65585

Natural Grain
65755

Carmine
65855

Coordinating Products
Edit, Equal

Eclectic | Mix quick ship — Broadloom

64755 Marble

Product Specifications

Style Number	5A164	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5918 ozs./yd³	11.16 kilotex
Pattern Repeat	1.81 in x 1.75 in	4.59 cm x 4.45 cm
Secondary Backing	ClassicBac®	

Season
64330


Water
64485

Pepper
64500

Stipple
64505

Tortoise Shell
64740

Marble
64755

Dapple
64761

Mosaic
64855

Coordinating Products
Catalyst Tile, Hybrid Tile, Meld

Edit | Turn-Key quick ship — Broadloom

67103 Down To Earth

Product Specifications

Style Number	5A067	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6411 ozs./yd³	13.72 kilotex
Pattern Repeat	.4 in x .6 in	1.02 cm x 1.52 cm
Secondary Backing	ClassicBac®	

Down To Earth
67103

Sweetgrass
67300

Urban Jungle
67309

Raw Denim
67485

Calculate
67500

Sheer Magnetic
67504


Cast Iron
67585

Natural Grain
67755


Carmine
67855

Coordinating Products
Equal, Divide

Equal | Turn-Key quick ship — Broadloom

66103 Down To Earth

Product Specifications

Style Number	5A066	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6686 ozs./yd³	15.34 kilotex
Pattern Repeat	.8 in x .82 in	2.03 cm x 2.08 cm
Secondary Backing	ClassicBac®	

Down To Earth
66103

Sweetgrass
66300

Urban Jungle
66309


Raw Denim
66485

Calculate
66500

Sheer Magnetic
66504

Cast Iron
66585

Natural Grain
66755

Carmine
66855

Essential | Turn-Key quick ship — Broadloom

88761 True Taupe

Coordinating Products
Prime

Product Specifications

Style Number	5A188	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5255 ozs./yd³	10.61 kilotex
Pattern Repeat	1.2 in x .5 in	3.05 cm x 1.27 cm
Secondary Backing	ClassicBac®	

Prime Tan 88111

Fresh Green 88330

Smart Blue 88485

Basic Black 88500

Perfect Charcoal 88505

Vital Gray 88585


Simple Brown 88740

Classic Khaki 88755

True Taupe 88761

Field Trip quick ship — Broadloom

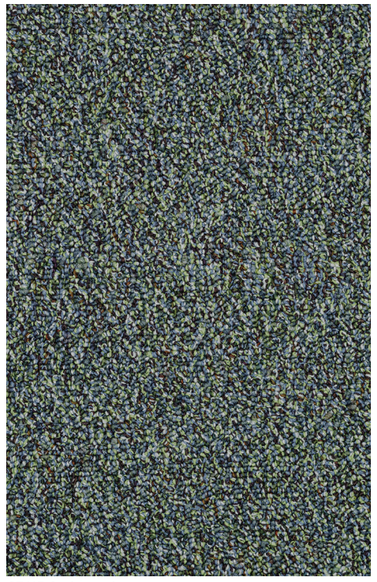

97415 Smithsonian

Product Specifications

Style Number	60665	
Fibre	EcoSolution Q® Nylon	
Dye Method	83% Solution Dyed / 17% Yarn Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/8	31.5/10 cm
Average Density	9421 ozs./yd³	13.03 kilotex
Pattern Repeat	None	
Secondary Backing *	EcoWorx® Performance Broadloom*	
	**Also available on Ultraloc® 60497*	

Nature Trail 97205


Space Camp 97315


Picnic 97420

Flare | Bright Work quick ship — Broadloom

27505 Moonlit

Coordinating Products
Allure Tile, Amplify, Flicker, Glimmer Tile, Illuminate, Shine Tile

Product Specifications

Style Number	5A175	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	5799 ozs./yd³	12.22 kilotex
Pattern Repeat	1.5 in x 3.06 in	3.81 cm x 7.77 cm
Secondary Backing	ClassicBac®	

Golden 27150


Flashpoint 27485

Spark 27500

Starlight 27504

Moonlit 27505


Gleam 27585

Bronzed 27750

Afterglow 27755

Gloss 27761

Flicker | Bright Work quick ship — Broadloom

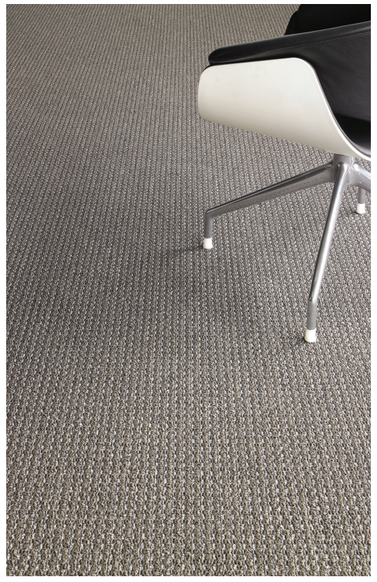

27505 Moonlit

Coordinating Products
Allure Tile, Amplify, Flare, Glimmer Tile, Illuminate, Shine Tile

Product Specifications

Style Number	5A174	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	7024 ozs./yd³	12.41 kilotex
Pattern Repeat	.593 in x .781 in	1.5 cm x 1.98 cm
Secondary Backing	ClassicBac®	

Golden 27150


Flashpoint 27485


Spark 27500


Starlight 27504


Moonlit 27505


Gleam 27585


Bronzed 27750

Afterglow 27755


Gloss 27761

Fossil | Turn-Key quick ship

Broadloom

38150 Burl

Product Specifications

Style Number	5A038	
Fibre	Solution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	6042 ozs./yd³	10.60 kilotex
Pattern Repeat	None	
Secondary Backing	ClassicBac®	

Burl
38150

Willow
38315

Alder
38485

Tupelo
38510

Tigerwood
38515



Sassafras
38855

Coordinating Products
Terra

Gradient | Shade quick ship

Broadloom

34595 Cobble Grey

Product Specifications

Style Number	5A153	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	30 oz.	1,017.2 g/m²
Gauge	1/8	31.5/10 cm
Average Density	11020 ozs./yd³	13.58 kilotex
Pattern Repeat	None	
Secondary Backing	ClassicBac®	

Sandstone
34111

Essential
34330



Sapphire Blue
34485

Charcoal
34500

Total Eclipse
34505

Mercury
34585

Mystique
34590

Cobble Grey
34595

Char Brown
34740

Mocha
34750

Driftwood
34755

Bird's Eye
34761

Coordinating Products
Brilliance Tile, Gradient Tile, Tint, Tone

Grove | Places quick ship

Broadloom

72760 Village

Product Specifications

Style Number	5A234	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6828 ozs./yd³	12.25 kilotex
Pattern Repeat	24 in x 24 in	60.96 cm x 60.96 cm
Secondary Backing	ClassicBac®	

Skyline
72500

Market
72505

Scenic
72515

Metro
72530

Ocean
72535

Urban
72557

Island
72595

Village
72760

Earthy
72761

Coordinating Products
Birch, Central Line Tile, City Central Tile, Sea Tile, Sea Edge Tile, Sky Tile, Summit

Illuminate | Bright Work quick ship

Broadloom

27504 Starlight

Product Specifications

Style Number	5A177	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6769 ozs./yd³	11.65 kilotex
Pattern Repeat	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Ultraloc®	

Golden
27150



Flashpoint
27485



Spark
27500

Starlight
27504



Moonlit
27505

Gleam
27585

Bronzed
27750

Afterglow
27755

Gloss
27761

Interplay quick ship — Broadloom

89210 Mesh

Product Specifications

Style Number	60589	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8069 ozs./yd³	14.62 kilotex
Pattern Repeat	None	
Secondary Backing	Ultraloc®	

Get Going 89320


Give And Take 89400


Activate 89420

Transaction 89620

Meld | Mix quick ship — Broadloom

64755 Marble

Product Specifications

Style Number	5A165	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10
Average Density	6171 ozs./yd³	12.07 kilotex
Pattern Repeat	1.59 in x .46 in	4.04 cm x 1.17 cm
Secondary Backing	ClassicBac®	

Season 64330

Water 64485


Pepper 64500

Stipple 64505

Tortoise Shell 64740

Marble 64755

Dapple 64761

Mosaic 64855

Coordinating Products
Catalyst Tile, Eclectic, Hybrid Tile

Modify | View quick ship — Broadloom

03597 Distance

Product Specifications

Style Number	5A204	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g
Gauge	1/10	39.4/10 cm
Average Density	5180 ozs./yd³	11.35 kilotex
Pattern Repeat	0.8 in x 1.25 in	2.03 cm x 3.18 cm
Secondary Backing	ClassicBac®	

Sight 03111

Drift 03170

Flip 03335

Vista 03481


Horizon 03496

Space 03500

Zone 03505

Gaze 03530

Outlook 03557

Distance 03597

Range 03755

Movement quick ship — Broadloom

75761 Sulu

Product Specifications

Style Number	50875	
Fibre	EcoSolution Q® Nylon	
Dye Method	90% Solution Dyed / 10% Yarn Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6109 ozs./yd³	12.49 kilotex
Pattern Repeat	.4 in x .6 in	1.02 cm x 1.52 cm
Secondary Backing	Ultraloc®	

Arabian Sea 75230

Bay Of Bengal 75490

Coral 75500

North Sea 75560

Sulu 75761

Outline | Rewoven quick ship

Broadloom

87515 Zinc

Product Specifications

Style Number	5A187	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6042 ozs./yd³	12.14 kilotex
Pattern Repeat	3.2 in x .8 in	8.13 cm x 2.03 cm
Secondary Backing	ClassicBac®	

Bisque 87111 | Swept 87322 | Night 87496 | Underground 87505 | Zinc 87515 | Carbon 87585

Canyon 87750 | Suede 87755 | Clay 87761

Coordinating Products
Align Tile, Contour, Dimension, Layer, Sculpt Loop Tile, Sculpt Tile, Trace Tile

Prime | Turn-Key quick ship

Broadloom

88761 True Taupe

Product Specifications

Style Number	5A189	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5255 ozs./yd³	11.81 kilotex
Pattern Repeat	1.6 in x 2.5 in	4.06 cm x 6.35 cm
Secondary Backing	ClassicBac®	

Simple Brown 88740 | Classic Khaki 88755 | True Taupe 88761

Coordinating Products
Essential

Prosper | Abundant Life II quick ship **

Broadloom

26251 Grow

Product Specifications

Style Number	60726	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	28 oz.	949.4 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5169 ozs./yd³	12.91 kilotex
Pattern Repeat	.63 in x .44 in	1.6 cm x 1.12 cm
Secondary Backing *	EcoWorx® Performance Broadloom	
	**Also available with ClassicBac® - 60730*	

Emerge 26106 | Elevate 26150 | Surpass 26151 | Grow 26251 | Climb 26350

Arrive 26715

Coordinating Products
Accomplish, Aspire

**Quick Ship Available For Orders Up To 600 Yds On EcoWorx® Performance Broadloom Backing Only.

Reminisce | Kindred quick ship

Broadloom

48515 Hearten

Product Specifications

Style Number	5A248	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	5205 ozs./yd³	10.42 kilotex
Pattern Repeat	4 in x 6 in	10.16 cm x 15.24 cm
Secondary Backing	Ultraloc®	



Warmth 48111 | Solace 48485 | Bundle 48500 | Blanket 48505 | Hearten 48515 | Wrap 48516

Sense 48535 | Hearth 48585 | Nestle 48760

Coordinating Products
Stay, Belong Tile, Dream Tile, Memory Tile

Scenery | Living Environments quick ship — Broadloom

00184 View

Coordinating Products
Statement LVT, Solitude LVT, Stratum 500, Stratum 700, Terrain II LVT

Product Specifications

Style Number	5A255	
Fibre	Nylon	
Dye Method	100% Continuous Dyed	
Tufted Weight	25 oz.	847.6 g/m²
Gauge	1/8	31.5/10 cm
Average Density	2432 ozs./yd³	6.64 kilotex
Pattern Repeat	1.25 in x 1 in	3.18 cm x 2.54 cm
Secondary Backing	ClassicBac®	

Setting 00170 · Outlook 00171 · Moment 00172 · Charming 00173 · Picturesque 00175 · Neighborhood 00182

Picket Fence 00183 · View 00184 · Skylit 00473 · Flora 00477 · Waterside 00480 · Painterly 00481

Courtyard 00570 · Terrace 00574 · Veranda 00576 · Backdrop 00577 · Artistry 00770

more colors

Vintage 00771 · Cottage 00773 · Vista 00783

Scribe | Hand Drawn quick ship — Broadloom

15761 Gouche

Coordinating Products
Brush LVT (8 mil, 12 mil, 20 mil), Conté, Erase, Erase, Fine Point Tile, Line Weight Tile, Line LVT (12 mil, 20 mil), Plaster LVT (12 mil, 20 mil), Stipple Tile, Stylus

Product Specifications

Style Number	5A215	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5106 ozs./yd³	11.01 kilotex
Pattern Repeat	14.4 in x 18 in	36.58 cm x 45.72 cm
Secondary Backing	ClassicBac®	

Gesso 15111 · Parchment 15170 · Landscape 15322 · Stencil 15325 · Ink 15496 · Carbon 15505

Graphite 15510 · Charcoal 15557 · Slate 15585 · Bistre 15750 · Gouache 15761 · Sanguine 15880

Space | Turn-Key quick ship — Broadloom

11150 Bare Necessities

Product Specifications

Style Number	50911	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	26 oz.	881.6 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6545 ozs./yd³	11.31 kilotex
Pattern Repeat	.3 in x 1.5 in	.76 cm x 3.81 cm
Secondary Backing	ClassicBac®	

Bare Necessities 11150 · Exotic Seasalt 11315 · Harbouring Desires 11485 · Steeling Beauty 11500 · Atmosfera 11760 · Ciao Bella 11855

Statement | Living Environments quick ship — Broadloom

00512 Gallery

Coordinating Products
Reimagine, Scenery LVT, Solitude LVT, Stratum 500, Stratum 700, Terrain II LVT

Product Specifications

Style Number	5A257	
Fibre	Nylon	
Dye Method	100% Continuous Dyed	
Tufted Weight	25.3 oz.	857.8 g/m²
Gauge	5/32	25.2/10 cm
Average Density	5358 ozs./yd³	8.12 kilotex
Pattern Repeat	1 in x .625 in	2.54 cm x 1.59 cm
Secondary Backing	ClassicBac®	

Motif 00111 · Stylized 00112 · Essential 00113 · Genuine 00171 · Sensibility 00173 · Reined 00220

Heirloom 00221 · Native 00228 · Expression 00352 · Gallery 00512 · Integral 00513 · Progressive 00515

Presence 00523 · Graceful 00535 · Envelop 00539 · Harmonize 00544 · Receptive 00559 · Symbolism 00572

Cohesive 00712 · Tailored 00735 · Authentic 00754 · Theme 00763 · Detail 00776

Stay | Kindred quick ship — Broadloom

47515 Hearten

Coordinating Products
Reminisce, Belong Tile, Dream Tile, Memory Tile

Product Specifications

Style Number	5A247	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	5333 ozs./yd³	11.84 kilotex
Pattern Repeat	.5 in x .625 in	1.27 cm x 1.59 cm
Secondary Backing	Ultraloc®	

Warmth 47111 · Solace 47485 · Bundle 47500 · Blanket 47505 · Hearten 47515 · Wrap 47516

Sense 47535 · Hearth 47585 · Nestle 47760

Stylus | Hand Drawn quick ship — Broadloom

15761 Gouache

Coordinating Products
Brush LVT (8 mil, 12 mil, 20 mil), Conté, Erase, Fine Point Tile, Line Weight Tile, Line LVT (12 mil, 20 mil), Plaster LVT (12 mil, 20 mil), Scribe, Stipple Tile

Product Specifications

Style Number	5A216	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5106 ozs./yd³	11.36 kilotex
Pattern Repeat	14.4 in x 24 in	36.58 cm x 61 cm
Secondary Backing	ClassicBac®	

Graphite 15510 · Gesso 15111 · Parchment 15170 · Landscape 15322 · Stencil 15325 · Ink 15496

Carbon 15505 · Charcoal 15557 · Bistre 15750 · Gouache 15761 · Slate 15585 · Sanguine 15880

Summit | Places quick ship — Broadloom

72760 Village

Product Specifications

Style Number	5A233	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/12	47.2/10 cm
Average Density	6712 ozs./yd³	12.24 kilotex
Pattern Repeat	24 in x 24 in	61 cm x 61 cm
Secondary Backing	ClassicBac®	



Ocean 72535 · Island 72595 · Metro 72530 · Urban 72557 · Skyline 72500 · Scenic 72515

Earthy 72761 · Village 72760 · Market 72505

Coordinating Products
Birch, Central Line Tile, City Central Tile, Grove, Sea Tile, Sea Edge Tile, Sky Tile

Terra | Turn-Key quick ship — Broadloom

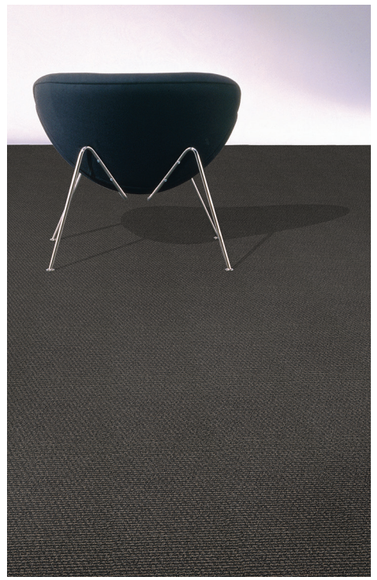

37500 Black Gum

Product Specifications

Style Number	5A037	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/10	39.4/10 cm
Average Density	8727 ozs./yd³	12.55 kilotex
Pattern Repeat	None	
Secondary Backing	ClassicBac®	



Burl 37150 · Cypress 37220 · Willow 37315 · Alder 37485 · Black Gum 37500 · Tupelo 37510



Tigerwood 37515 · Hemlock 37550 · Teak 37750 · Cocobola 37760 · Sequoia 37761 · Sassafras 37855

Coordinating Products
Fossil

Switch | View quick ship — Broadloom

03597 Distance

Product Specifications

Style Number	5A205	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5035 ozs./yd³	11.64 kilotex
Pattern Repeat	14.4 in x 20 in	36.58 cm x 50.8 cm
Secondary Backing	ClassicBac®	

Sight 03111 · Drift 03170 · Flip 03335 · Vista 03481 · Horizon 03496 · Space 03500



Zone 03505 · Gaze 03530 · Outlook 03557 · Distance 03597 · Range 03755 · Area 03761

Coordinating Products
Direction Tile, Field Tile, Modify, Realm Tile, Reverse Tile, Scape Tile, Shape Tile, Transfer

Tint | Shade quick ship — Broadloom

51585 Metal Grey

Product Specifications

Style Number	5A151	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	8640 ozs./yd³	11.71 kilotex
Pattern Repeat	.5 in x .625 in	1.27 cm x 1.59 cm
Secondary Backing	ClassicBac®	



Maple Sugar 51111 · Forest Green 51330 · Blue Ink 51485 · Chimney Black 51500 · Black Ice 51505 · Metal Grey 51585

Brownstone 51740 · Wheat Field 51755 · Cinderblock 51761

Coordinating Products
Brilliance Tile, Gradient, Gradient Tile, Tone

Tone | Shade quick ship

Broadloom

51585 Metal Grey

Product Specifications

Style Number	5A152	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.8 g/m²
Gauge	1/8	31.5/10 cm
Average Density	6968 ozs./yd³	10.26 kilotex
Pattern Repeat	4 in x 6 in	10.16 cm x 15.24 cm
Secondary Backing	ClassicBac®	



Maple Sugar 51111 | Forest Green 51330 | Blue Ink 51485 | Chimney Black 51500 | Black Ice 51505 | Metal Grey 51585

Brownstone 51740 | Wheat Field 51755 | Cinderblock 51761

Coordinating Products
Brilliance Tile, Gradient, Gradient Tile, Tint

Transfer | View quick ship

Broadloom

03597 Distance

Product Specifications

Style Number	5A203	
Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution	
Tufted Weight	20 oz.	678.1 g/m²
Gauge	1/10	39.4/10 cm
Average Density	5035 ozs./yd³	10.90 kilotex
Pattern Repeat	14.4 in x 14.4 in	36.58 cm x 36.58 cm
Secondary Backing	ClassicBac®	



Sight 03111 | Drift 03170 | Flip 03335 | Vista 03481 | Horizon 03496 | Space 03500



Zone 03505 | Gaze 03530 | Outlook 03557 | Distance 03597 | Range 03755 | Area 03761

Coordinating Products
Direction Tile, Field Tile, Modify, Realm Tile, Reverse Tile, Scape Tile, Shape Tile, Switch

Colour and Visual Variations

Colour and visual variation is inherent in all modular resilient products. It can vary slightly or significantly from piece to piece within a colour. V1 has little or no variation from piece to piece. V4 will have a large variation in colour and visual. For more information on product variation and to view swatch installations go to **shawcontract.com**.

V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation



Variations are listed on product pages under the colour numbers.

Terrain II quick ship

Resilient | COREtec®

00568 Root

Coordinating Products
Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm

Product Specifications

Style Number	4125V
Construction	Multilayer SPC
Class / ASTM F3261	Class III, Type B
Wear Layer Thickness	20 mil or 0.02 in (0.51 cm)
Overall Thickness	0.157 in | 4 mm
Actual Dimensions	7 in x 48 in | 17.78 cm x 121.92 cm
Finish	ExoGuard+®
Installation	Direct Glue
Static Load Limit/ASTM F970	Passes, 2500 psi

Willow 00170 **V3**
Thatch 00173 **V2**
Ash 00174 **V3**
Trail 00256 **V2**
Shade 00564 **V2**
Root 00568 **V3**
Timber 00572 **V2**
Pirch 00684 **V2**
Lodge 00740 **V2**
Grove 00769 **V3**
Nest 00774 **V2**
Echo 00775 **V2**
Summit 05012 **V3**
Orchard 05013 **V2**
Lark 05016 **V3**
Aspen 05019 **V3**
Sequoia 07003 **V2**
Sumac 07004 **V3**
Alder 07005 **V4**
Thicket 07008 **V3**

Terrain II quick ship

Resilient | LVT

00568 Root

See Resilient Accessories section for coordinating transitions and trims, page 548

Product Specifications

Style Number	0453V (12 mil) | 0454V (20 mil) 0892V (30 mil) | 4110V (20 mil)
Construction	Commercial Luxury Vinyl Tile
Class / ASTM F1700	Class III, Printed Type B
Wear Layer Thickness	12 mil or 0.012 in (0.304 mm) 20 mil or 0.02 in (0.508 mm) 30 mil or 0.03 in (0.762 mm) 20 mil or 0.02 in (0.508 mm)
Overall Thickness	0.098 in (2.5 mm) 0.098 in (2.5 mm) 0.12 in (3.0 mm) 0.197 in (5.0 mm)
Actual Dimensions	5.96 in x 48.0 in | 15.13 cm x 121.92 cm
Area Per Carton	41.72 ft² | 3.88 m² (12 mil, 20 mil) 35.76 ft² | 3.32 m² (30 mil)
Finish	ExoGuard+®
Installation	Direct Glue
Static Load Limit/ASTM F970	Passes, 1500 psi

Willow 00170 **V3**
Thatch 00173 **V2**
Ash 00174 **V3**
Trail 00256 **V2**
Shade 00564 **V2**
Root 00568 **V3**
Timber 00572 **V2**
Pirch 00684 **V2**
Lodge 00740 **V2**
Grove 00769 **V3**
Nest 00774 **V2**
Echo 00775 **V2**
Summit 05012 **V3**
Orchard 05013 **V2**
Lark 05016 **V3**
Aspen 05019 **V3**
Sequoia 07003 **V2**
Sumac 07004 **V3**
Alder 07005 **V4**
Thicket 07008 **V3**

ACCESSORIES + RESOURCES

Lead times vary based on product and quantity.
Contact your local account manager for current lead times and availability.

Adhesives + Epoxy

Name / Description	Approved Products	Moisture Limit	Spread Rate
LokWorx+ Broadloom Adhesive Premium	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC	Up to 95% RH	10-12 yd2/gal (90-108 ft2/gal)
1200 Standard	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC	Up to 90% RH	10-12 yd2/gal (90-108 ft2/gal)
1036 Antimicrobial AATCC174	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC	Up to 85% RH	8-10 sq yds per gallon using 1/8 in U-notch
3600 Antimicrobial AATCC174	EcoWorx® Performance Broadloom (EPBL) EcoWorx® Broadloom (EBL)	Up to 85% RH	**Pattern Carpet** 5-7 sq yds per gallon using 1/8 in U-notch **Non-Pattern Carpet** 8-9 sq yds per gallon using 3/32 in U-notch
3800 Indoor/Outdoor	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC EcoWorx® Performance Broadloom (EPBL) EcoWorx® Broadloom (EBL)	Up to 90% RH	8-10 sq yds per gallon using 1/8 in U-notch
4000 Seam Sealer	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC	No moisture testing required	550-600 Linear ft per quart
4151 High moisture, pressure sensitive adhesive (non-patterned broadloom)	EcoWorx® Performance Broadloom (EPBL)	Up to 99% RH	**Non-Patterned Broadloom** 13-18 sq yds per gallon using 1/8 in x 1/8 in x 1/8 in U-notch
8300 Seam sealer with moisture impervious seams	ClassicBac® Ultraloc® Ultraloc® MB Ultraloc® MP Ultraloc® MPC EcoWorx® Performance Broadloom (EPBL) EcoWorx® Broadloom (EBL)	No moisture testing required	138-150 Linear ft per 8 oz bottle
LokSeam Two-part clear polyester polyurethane	Product to Product: All	No moisture testing required	450 linear feet per cartridge

Moisture Solutions

Name / Description	Approved Products	Moisture Limit	Spread Rate	Features
Surface Prep EXT™ Concrete prep that creates a pristine concrete surface 255VS	All	Perform moisture testing to determine appropriate product solution	900 sq ft / 4-gal pail	• Concrete cleaner and heavy duty etching agent that neutralizes pH • Spray-on solution that provides a less expensive alternative to grinding and/or bead blasting • Required for both MoistureShield™ and MoistureTek™ • Does not generate dust or othercontaminants into the atmosphere
MoistureShield™ Applied moisture barrier 256VS	All	up to 99% RH or greater, ≤12 MVER, ≤12 pH	900 sq ft / 4-gal pail	• Spray-on solution that provides a permanent breathable membrane just below the surface of the concrete • Dries in 2-3 hours
MoistureTek™ Applied moisture barrier 231DE	All	up to 100% RH, >12 MVER, >12pH	300–350 sq ft / 4-gal kit using a 1/8" × 1/8" × 1/8" V-notch squeegee	• 2-part Epoxy • Can be applied to concrete as early as 24 hours after a concrete pour • Cures in 6-8 hours depending on ambient temperature and humidity
MRP™ Barrier primer that isolates contaminants 235DE	All	up to 99% RH, 14 MVER, 14 pH	600 sq ft / 4-gal using a 9" or 18" nap roller (1/4" - 3/8")	• Permanent 2-part, water-based epoxy primer • Can be installed over chemically abated floors • Apply to concrete, metal, wood, fiberglass or terrazzo • Only one coat needed in most installations

Cushions

Name / Description	Approved Products	Installation	Benefits	Features
DuraWorx A breathable polyurethane carpet cushion that provides enhanced support and comfort to carpet in any commercial space.	ClassicBac® Ultraloc® Ultraloc® MB EcoWorx® Broadloom (EBL)	Stretch-In* Double Glue	Comfort and Moisture Barrier	• Enhanced comfort • Breathable moisture barrier keeps spills from penetrating the cushion for 24 hours • Commercial limited warranty • Green label plus certified • Contributes to LEED • Made in the USA
Eco Fiber Touch A premium recycled synthetic fiber cushion that provides underfoot comfort and exceptional stability to broadloom carpet.	ClassicBac® Ultraloc® Ultraloc® MB EcoWorx® Broadloom (EBL)	Stretch-In* Stretch-In* Stretch-In* Stretch-In*	Comfort	• Premium blend of fiber provides long-lasting support in high-traffic areas • Cradle to cradle™ certified bronze • Contributes to LEED • Commercial limited 10 year warranty
Fiber Select Value recycled synthetic fiber cushion that performs in high-traffic stretch-in broadloom carpet applications.	ClassicBac® Ultraloc® Ultraloc® MB EcoWorx® Broadloom (EBL)	Stretch-In* Stretch-In* Stretch-In* Stretch-In*	Comfort in high-traffic areas	• Constructed with 100% recycled content, saving fiber from landfills • Cradle to cradle™ certified bronze • Contributes to LEED • Commercial limited 10 year warranty
DoubleStick Cushion Synthetic fiber cushion is constructed of dense fiber and a smooth surface finish making it ideal for double stick broadloom carpet installations in high-traffic areas.	ClassicBac® Ultraloc® Ultraloc® MB	Stretch-In* Double Glue Stretch-In* Double Glue Stretch-In* Double Glue	Comfort in high-traffic areas	• Dense and resilient for lasting, comfortable support in high-traffic areas • Unique surface finish for easy installation • Contains 85% recycled content • Green label plus certified • Contributes to LEED • Made in the USA • Commercial limited warranty

*Stretch-in installations should not exceed 30 ft x 30 ft area.

Adhesives + Epoxy

Name / Description	Approved Products	Moisture Limit	Spread Rate
5100 Standard	EcoWorx® Tile EcoLogix® Tile StrataWorx® Tile	Up to 95% RH	28-39 yd2/gal (250-350 ft2/gal)
LokWorx+ Carpet Tile Adhesive Premium	EcoWorx® Tile EcoLogix® Tile StrataWorx® Tile	Up to 97% RH	28-39 yd2/gal (250-350 ft2/gal)
5036 Antimicrobial AATCC174	EcoWorx® Tile EcoLogix® Tile StrataWorx® Tile	Up to 95% RH	3/8 in foam or medium nap roller application will yield 35-40 yds per gallon 1/16 in x 1/32 in x 5/64 in V-notch trowel application will yield 18-20 yds per gallon
3800 Indoor/Outdoor	EcoWorx® Tile EcoLogix® Tile StrataWorx Tile	Up to 90% RH	8-10 sq yds per gallon using 1/8 in U-notch
4151 High moisture, pressure sensitive adhesive	EcoWorx® Tile EcoLogix® Tile StrataWorx® Tile	Up to 99% RH	**Carpet Tile** 28-33 sq yds per gallon using 1/16 in x 1/32 in x 5/64 in U-notch or 35-40 sq yds per gallon using 3/8 in foam or medium nap roller **Non-Patterned Broadloom** 13-18 sq yds per gallon using 1/8 in x 1/8 in x 1/8 in U-notch
es Custom option mill applied adhesive	EcoWorx® Tile EcoLogix® Tile	100% (no visible moisture)	
LokDots Field applied adhesive alternative	EcoWorx® Tile StrataWorx®	No moisture testing required	One sleeve = 8 rolls = approx. 250 yds One case = 96 rolls = approx. 3000 yds Half sleeve = 4 rolls = approx. 125 yds
LokWorx Adheisve Tabs Field applied adhesive alternative	EcoWorx® Tile StrataWorx®	Up to 85% RH	Generally 222 sq yds per box, but dependent on cuts and layouts.
LokSeam Two-part clear polyester polyurethane	Product to Product: All	No moisture testing required	450 linear feet per cartridge

Cushions

Name / Description	Approved Products	Installation	Benefits	Features
CushionWorx™ Premium polyethylene foam cushion underlayment, performs with EcoWorx® carpet tile for comfort underfoot and sound reduction in high-traffic environments	EcoWorx® Tile	Double Glue	Comfort and Sound Reduction	• Provides more noticable comfort underfoot than with EcoWorx carpet tile alone • Reduced sound transfer when installed with EcoWorx® carpet tile in commercial public spaces • Adheres to concrete and wood subfloors with Shaw 3800 adhesive. Provide added stability by using Shaw 5100 adhesive to adhere EcoWorx® carpet tile to CushionWorx™
CushionWorx™ Lite Premium polyethylene foam cushion underlayment, performs with EcoWorx® carpet tile for comfort underfoot	EcoWorx® Tile	Double Glue	Comfort	• Provides comfort and sound reduction • Adheres to concrete and wood subfloors with Shaw 3800 adhesive to adhere EcoWorx® carpet tile to CushionWorx™
DuraWorx Breathable polyurethane carpet cushion that provides enhacned support and comfrt to carpet in virtually any commercial space	EcoWorx® Tile	Reverse Double Glue	Comfort and Moisture Barrier	• High performance polyurethane provides enhanced support • Breathable moisture barrier keeps spills from penetrating cushion for 24 hours • Commercial limited warranty • Green Label Plus Certified, contributes to LEED

Moisture Solutions

Name / Description	Approved Products	Moisture Limit	Spread Rate	Features
Surface Prep EXT™ Concrete prep that creates a pristine concrete surface 255VS	All	Perform moisture testing to determine appropriate product solution	900 sq ft / 4-gal pail	• Concrete cleaner and heavy duty etching agent that neutralizes pH • Spray-on solution that provides a less expensive alternative to grinding and/or bead blasting • Required for both MoistureShield™ and MoistureTek™ • Does not generate dust or othercontaminants into the atmosphere
MoistureShield™ Applied moisture barrier 256VS	All	up to 99% RH or greater, ≤12 MVER, ≤12 pH	900 sq ft / 4-gal pail	• Spray-on solution that provides a permanent breathable membrane just below the surface of the concrete • Dries in 2-3 hours
MoistureTek™ Applied moisture barrier 231DE	All	up to 100% RH, >12 MVER, >12pH	300–350 sq ft / 4-gal kit using a 1/8" × 1/8" × 1/8" V-notch squeegee	• 2-part Epoxy • Can be applied to concrete as early as 24 hours after a concrete pour • Cures in 6-8 hours depending on ambient temperature and humidity
MRP™ Barrier primer that isolates contaminants 235DE	All	up to 99% RH, 14 MVER, 14 pH	600 sq ft / 4-gal using a 9" or 18" nap roller (1/4" - 3/8")	• Permanent 2-part, water-based epoxy primer • Can be installed over chemically abated floors • Apply to concrete, metal, wood, fiberglass or terrazzo • Only one coat needed in most installations

Adhesives + Epoxy

Name / Description	Approved Products	Moisture Limit	Spread Rate
35 MC Moisture Curing Urethane	Engineered Hardwood	Up to 95% RH	Hardwood thickness of greater than 3/8 in Up to 30 sq ft per U.S. gal Thickness of or less than 3/8 in Up to 36 sq ft per U.S gal
Tongue and Groove Tongue and Groove for floating installations	Engineered Hardwood	n/a	1/8 in bead, 100-150 linear feet

Moisture Solutions

Name / Description	Approved Products	Moisture Limit	Spread Rate	Features
Surface Prep EXT™ Concrete prep that creates a pristine concrete surface 255VS	All	Perform moisture testing to determine appropriate product solution	900 sq ft / 4-gal pail	• Concrete cleaner and heavy duty etching agent that neutralizes pH • Spray-on solution that provides a less expensive alternative to grinding and/or bead blasting • Required for both MoistureShield™ and MoistureTek™ • Does not generate dust or othercontaminants into the atmosphere
MoistureShield™ Applied moisture barrier 256VS	All	up to 99% RH or greater, ≤12 MVER, ≤12 pH	900 sq ft / 4-gal pail	• Spray-on solution that provides a permanent breathable membrane just below the surface of the concrete • Dries in 2-3 hours
MoistureTek™ Applied moisture barrier 231DE	All	up to 100% RH, >12 MVER, >12pH	300–350 sq ft / 4-gal kit using a 1/8" × 1/8" × 1/8" V-notch squeegee	• 2-part Epoxy • Can be applied to concrete as early as 24 hours after a concrete pour • Cures in 6-8 hours depending on ambient temperature and humidity
MRP™ Barrier primer that isolates contaminants 235DE	All	up to 99% RH, 14 MVER, 14 pH	600 sq ft / 4-gal using a 9" or 18" nap roller (1/4" - 3/8")	• Permanent 2-part, water-based epoxy primer • Can be installed over chemically abated floors • Apply to concrete, metal, wood, fiberglass or terrazzo • Only one coat needed in most installations

Transitions & Trims

	Flush Reducer	Flush Stairnose	Overlap Reducer	Overlap Stairnose	Quarter Round	T-Mold	Threshold
Authenticity CA326	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12
Bespoke CA350	CRH12	CSH12	n/a	n/a	CAQTR	CATMH	CCH12
Camaret 203UV	03W38	n/a	n/a	03W73	03W07	04W19	02W74
Distinctive CA334	CRW38	CSW38	CORW8	COS28	CAQTR	CATMW	CCW38
Handcrafted CA364	CRD58	CSD58	CORD5	COSD5	CAQTR	CTM58	CTDH5
Kinship CA361	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12
Refined CA308	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12
Resurgence CA286	CRH12	CSH12	CORH2	COSH2	CAQTR	CATMH	CCH12

Underlayment

Name / Description	Approved Products	Installation	Benefits	Features
Silent Step™ Ultra Silent Step™ Ultra is a superior performance acoustical flooring underlayment with unsurpassed sound absorption properties for use with laminate and hardwood floating flooring	Engineered Hardwood	Float with T&G adhesive	Sound Absorbtion and Moisture Resistance	• High density 100% closed cell polyolefin foam core • Attached 4 mil polyethylene moisture barrier for superior subfloor moisture resistance • Seam overlap protection with peel and stick adhesive strip eliminating the need to tape seams when installing over concrete • Excellent resilience and resistance to tears and punctures • Does not absorb or trap and hold subfoor moisture • Mold and mildew resistant
Natural Cork Some of the most effective sound control and crack suppression underlayment used under hard surface floors	Engineered Hardwood	Direct Glue	Sound Suppression	• Excellent sound suppression • Resist mold and mildew • Decreases step sound in rooms

Adhesives + Epoxy

Name / Description	Approved Products	Moisture Limit	Spread Rate
2000 S Standard *only applies to products Innate Tile and In Tandem Tile	Bio-Based Polyurethan Tile	Up to 85% RH	approx. 75 – 210 sq. ft./pail (1 gal.) 7– 9 m²/pail (1 gal.) approx. 225 – 630 sq. ft./pail (3 gal.) 20 – 58 m²/pail (3 gal.)
LokWorx Resilient Adhesive Standard	LVT, Sheet, Bio-Based Polyurethane Sheet	Up to 95% RH	175-225 ft2/gal
LokWorx+ Resilient Adhesive Premium	LVT, Sheet, Bio-Based Polyurethane Sheet	Up to 99% RH	175-225 ft2/gal
S150 Spray Adhesive	LVT, Sheet, Bio-Based Polyurethane Sheet	Up to 95% RH	1/16 V-notch trowel application will yield 18-20 yds per gallon
4151 High moisture, pressure sensitive adhesive	LVT, Sheet Bio-Based Polyurethane Sheet, Blown Foam LVT	Up to 99% RH Up to 90% RH	**Resilient** 19-22 sq yds per gallon using 1/16 in x 1/32 in x 1/32 in U-notch
LokSeam Two-part clear polyester polyurethane	Product to Product: All	No moisture testing required	450 linear feet per cartridge

Moisture Solutions

Name / Description	Approved Products	Moisture Limit	Spread Rate	Features
Surface Prep EXT™ Concrete prep that creates a pristine concrete surface 255VS	All	Perform moisture testing to determine appropriate product solution	900 sq ft / 4-gal pail	• Concrete cleaner and heavy duty etching agent that neutralizes pH • Spray-on solution that provides a less expensive alternative to grinding and/or bead blasting • Required for both MoistureShield ™ and MoistureTek™ • Does not generate dust or othercontaminants into the atmosphere
MoistureShield™ Applied moisture barrier 256VS	All	up to 99% RH or greater, ≤12 MVER, ≤12 pH	900 sq ft / 4-gal pail	• Spray-on solution that provides a permanent breathable membrane just below the surface of the concrete • Dries in 2-3 hours
MoistureTek™ Applied moisture barrier 231DE	All	up to 100% RH, >12 MVER, >12pH	300–350 sq ft / 4-gal kit using a 1/8" × 1/8" × 1/8" V-notch squeegee	• 2-part Epoxy • Can be applied to concrete as early as 24 hours after a concrete pour • Cures in 6-8 hours depending on ambient temperature and humidity
MRP™ Barrier primer that isolates contaminants 235DE	All	up to 99% RH, 14 MVER, 14 pH	600 sq ft / 4-gal using a 9" or 18" nap roller (1/4" - 3/8")	• Permanent 2-part, water-based epoxy primer • Can be installed over chemically abated floors • Apply to concrete, metal, wood, fiberglass or terrazzo • Only one coat needed in most installations

Product Specific Transitions* & Trims

	Quarter Round	OmniTrim™	Stair Cap	Baby Threshold	Reducer	Flush Stairnose	T-mold
Composed	01X46	n/a	01X95	01X20	01X70	02W17	02X62
Concrete	01X46	n/a	01X95	01X20	01X70	02W17	02X62
Defined	01V45	n/a	01V94	01V18	01V69	02W16	02W61
Stratum 500	01W27	n/a	01W78	01W02	01W54	02W01	02W24
Stratum 700	01W31	n/a	01W80	01W06	01W56	02W06	02W28
Stratum 1200	01W22	n/a	01W72	01W00	01W48	01W97	02W20
Stratum 1800	01W25	n/a	n/a	01W02	01W50	01W99	02W22
Stratum Eiris	01W40	n/a	01W90	01W14	01W65	02W13	02W57
Stratum Linear	01V39	n/a	01V89	01V13	01V64	02W12	02V56
Stratum Vortex	01W33	n/a	n/a	01W08	01W58	02W82	02W30
Terrain	SCQT1	SCUN1	SCSN1	n/a	n/a	n/a	n/a
Terrain II	SCQT2	SCUN2	SCSN2	n/a	n/a	n/a	n/a
Stratum XL	01W29	n/a	01X78	01W04	01X54	02W04	02W26
Repose	225DE	n/a	229DE	227DE	228DE	230DE	226DE
Respite	257VS	n/a	262VS	260VS	261VS	263VS	258VS

	Quarter Round	T-Molding	Multi-Reducer	Flush Stairnose	Baby Threshold
Quiet Cover	350VS	349VS	348VS	347VS	n/a
Solitude	350VS	349VS	348VS	347VS	380VS
Branching Out	375VS	376VS	378VS	379VS	377VS

Universal Transitions*

	Pinless Metal Track*	Tile-Carpet Reducer 1/8 in	Carpet Reducer 5/16 in	Snap-Down T-Molding 1 1/8 in	Resilient Carpet Reducer	Snap-Down T-Molding 2 in	Wedge*
Style Number	142VS	143VS	144VS	145VS	146VS	147VS	266VS

Available colours for universal transitions:

Black 00001 · Night 00066 · Granite 00005 · Tan 00048 · Suede 00074 · Bark 00043 · Dark 00054

Clay 00040 · Cement 00004 · Earthen 00014

*Colours not available for Pinless Metal Track or Wedge

*Adhere resilient transitions with contact cement or transition tape available through flooring supply locations.

Micro Transitions*

Style Name	Style Number	Usage
Finish 0.22 in	269VS	Transitions any 2.5 mm or 3 mm LVT to carpet between 0.20-0.229 in in height
Finish 0.25 in	268VS	Transitions any 2.5 mm or 3 mm LVT to carpet between 0.23-0.274 in in height
Finish 0.28 in	267VS	Transitions any 2.5 mm or 3 mm LVT to carpet between 0.274-0.349 in in height

Available colours for micro transitions:



Onyx 00595 | Gold 00155 | Champagne 00100 | Silver 00500

TrimMaster™

Reducer: ADA compliant - Transitions to lower surface flooring

3.5mm Reducer

5.5mm Reducer



8mm Reducer

Square Cap: Transitions to carpet or similar height surface

3.5mm Square Cap



5.5mm Square Cap



8mm Square Cap

T-Mold: Transitions to similar height flooring. Both sides tap down independently



3.5mm T-Mold



5.5mm T-Mold



8mm T-Mold

*Adhere Micro Transitions with Shaw Contract transition tap or other transition tape available through flooring supply locations.

TrimMaster™

Dark Bronze | Statin Nickel | Satin Silver

Style Name	Colour Name	Style Number
TrimMaster™ LVT Square 8mm	Satin Silver	119CA
TrimMaster™ LVT Square 8mm	Satin Nickel	120CA
TrimMaster™ LVT Square 8mm	Dark Bronze	121CA
TrimMaster™ LVT Reducer 8mm	Satin Silver	122CA
TrimMaster™ LVT Reducer 8mm	Satin Nickel	123CA
TrimMaster™ LVT Reducer 8mm	Dark Bronze	124CA
TrimMaster™ LVT T-Shape 8mm	Satin Silver	125CA
TrimMaster™ LVT T-Shape 8mm	Satin Nickel	126CA
TrimMaster™ LVT T-Shape 8mm	Dark Bronze	127CA
TrimMaster™ LVT Square 5.5mm	Satin Silver	128CA
TrimMaster™ LVT Square 5.5mm	Satin Nickel	129CA
TrimMaster™ LVT Square 5.5mm	Dark Bronze	130CA
TrimMaster™ LVT Reducer 5.5mm	Satin Silver	131CA
TrimMaster™ LVT Reducer 5.5mm	Satin Nickel	132CA
TrimMaster™ LVT Reducer 5.5mm	Dark Bronze	133CA
TrimMaster™ LVT T-Shape 5.5mm	Satin Silver	134CA
TrimMaster™ LVT T-Shape 5.5mm	Satin Nickel	135CA
TrimMaster™ LVT T-Shape 5.5mm	Dark Bronze	136CA
TrimMaster™ LVT Square 3.5mm	Satin Silver	137CA
TrimMaster™ LVT Square 3.5mm	Satin Nickel	138CA
TrimMaster™ LVT Square 3.5mm	Dark Bronze	139CA
TrimMaster™ LVT Reducer 3.5mm	Satin Silver	140CA
TrimMaster™ LVT Reducer 3.5mm	Satin Nickel	141CA
TrimMaster™ LVT Reducer 3.5mm	Dark Bronze	142CA
TrimMaster™ LVT T-Shape 3.5mm	Satin Silver	143CA
TrimMaster™ LVT T-Shape 3.5mm	Satin Nickel	144CA
TrimMaster™ LVT T-Shape 3.5mm	Dark Bronze	145CA

Underlayment

Name / Description	Approved Products	Installation	Benefits	Features
Hush II Sound absorbing, environmentally friendly acoustical flooring underlayment designed for use with luxury vinyl tile/plank.	LVT, Bio-Based Polyurethane Tile	Double Glue Direct Glue	Sound Reduction	• Blend of cork and recycled EVA foam granules • Excellent sound suppression • Resist mold and mildew • Decreases step sound in rooms • Suitable over concrete, wood, gypsum subfloors and radiant heat flooring • Contains 85%+ pre-consumer recycled material by weight
GroundWorks Is a noise reduction underlayment that was engineered to reduce sound transmission within multi-level structures. It is ideal for use with luxury vinyl plank.	LVT, Bio-Based Polyurethane Tile	Double Glue Direct Glue	Sound Reduction	• Excellent sound suppression • Resist mold and mildew • Decreases step sound in rooms

Weld Rods

Style Name	Style Number	Construction	Length	Products to be Used with
Weld Rod	353VS	PVC	180'	Basstones™ 0301V Constant 0512V Naturelife™ Wood 0002V Reed 0797V Roji 0798V Tatami 0796V Vitality 0873V
Bio-Based Weld Rod	270VS	PVC-free	197'	In Tandem 0896V
Rexcourt Weld Rod	021VS	PVC	330'	Rexcourt™ 0004V

For matching colour information please refer to the product page.

Colour and Visual Variations

Colour and visual variation is inherent in all modular resilient and hardwood products. It can vary slightly or significantly from piece to piece within a colour. V1 has little or no variation from piece to piece. V4 will have a large variation in colour and visual. For more information on product variation and to view swatch installations go to **shawcontract.com**.

V1 Uniform Appearance

V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation



Variations are listed on product pages under the colour numbers.

Raised Round

Stair Treads

00066 Night

Product Specifications

Style Number	246VS (4 ft) | 247VS (6 ft)
Construction	Thermoplastic Rubber
Gauge	1/8 in (3.175 mm) | 1/8 in (3.175 mm)
Size	4 ft | 6 ft

Black 00001 | Night 00066 | Tan 00210 | Bark 00650 | Dark 00680 | Cement 00750

Earthen 00770

Raised Round Luminous

Stair Treads

00066 Night

Product Specifications

Style Number	252VS (4 ft) | 253VS (6 ft)
Construction	Thermoplastic Rubber
Gauge	1/8 in (3.175 mm) | 1/8 in (3.175 mm)
Size	4 ft | 6 ft

Black 00001 | Night 00066 | Tan 00210 | Bark 00650 | Dark 00680 | Cement 00750

Earthen 00770

FinishWorx | Wall Base

Wall Base

00066 White

Product Specifications

Style Number	167CA (4" Cove Length) | 168CA (4" Cove Roll) | 169CA (4" Straight Length) | 170CA (4" Straight Roll) | 175CA (4.5" Cove Length) | 173CA (6" Cove Length) | 174CA (6" Cove Roll)
Construction	Thermoplastic Rubber
Gauge	1/8 in
Warranty	5 years
Indoor Air Quality	FloorScore® certified
Recommended Adhesives	Wall Base Adhesive 141VS | Tube 166VS | 1 gallon 136VS | 4 gallon
Packaging	167CA (Length) | 168CA (Roll/Coil) | 169CA (Length) | 170CA (Roll/Coil) | 175CA (Length) | 173CA (Length) | 174CA (Roll/Coil)

* In Stock Color Options will ship in 2 business days.
* Quick Ship Color Options will ship in 10 business days

In Stock Color Options

Black 00001 | Linen 00011 | Night 00066 | Opal 00110 | Granite 00570 | Slate 00580

Pecan 00640 | Dark 00680 | Clay 00760 | Ebony 00785

Quick Ship Color Options

Charcoal 00550 | Coffee 00670 | Earthen 00770 | Suede 00170 | Flint 00790 | Marsh 00390

Bark 00650 | Tan 00210 | Flax 00190 | Parchment 00130

Made to Order Color Options

Steel 00003
Cement 00004
Metal 00006
Blue 00008
Nordic 00009
Navy 00010
Cyan 00012
Fog 00013
Aegean 00015
Hemlock 00016
Tropic 00017
Grey Amethyst 00019
Plum 00020
Lava 00021
Blush 00022
Moleskin 00024
Red 00025
Silver 00026
Cinnamon 00027
Sea 00029
Mist 00030
Green 00031
Sterling 00032
Mineral 00033
Viridian 00034
Steel 00036
Ivy 00037
Patina 00038
Leather 00041
Natural 00042
Yellow 00045
Gravel 00046
Glided 00047
Silt 00050
Ruby 00051
Lake 00056
Berry 00057
Cabernet 00059
Soft 00060
Stone 00063
Jungle 00069
Wheat 00070
Mica 00079
Tawny 00080
Henna 00083
Calypso 00089
Leaf 00092
Marsh 00093
Hyde 00097
Oyster 00098
Regal 00111

00001 Black

Product Specifications

Style Number	176CA (Roll) | 177CA (Length)
Construction	Thermoplastic Rubber
Gauge	1/8 in
Warranty	5 years
Indoor Air Quality	FloorScore® certified
Recommended Adhesives	Wall Base Adhesive 141VS | Tube 166VS | 1 gallon 136VS | 4 gallon
Packaging	176CA (Roll/Coil) | 177CA (Length)

Black 00001
Night 00066
Dark 00054

Angle Profile

Sculptured Base



Product Specifications

Style Number	149VS
Construction	Thermoplastic Rubber
Gauge	1/4 in
Size	4.5 in x 96 in
Adhesive	Wall Base Adhesive 141VS | tube 166VS | 1 gallon 136VS | 4 gallon

Black 00001
Night 00066
Opal 00067
Suede 00074
Dark 00054
Clay 00040

Detail Profile

Sculptured Base



Product Specifications

Style Number	150VS
Construction	Thermoplastic Rubber
Gauge	1/4 in
Size	4.5 in x 96 in
Adhesive	Wall Base Adhesive 141VS | tube 166VS | 1 gallon 136VS | 4 gallon

Black 00001 | Night 00066 | Opal 00067 | Suede 00074 | Dark 00054 | Clay 00040

Quarter Round Profile

Sculptured Base



Product Specifications

Style Number	151VS
Construction	Thermoplastic Rubber
Gauge	3/4 in
Size	0.75 in x 96 in
Adhesive	Wall Base Adhesive 141VS | tube 166VS | 1 gallon 136VS | 4 gallon

Black 00001 | Night 00066 | Opal 00067 | Suede 00074 | Dark 00054 | Clay 00040

Whisper

Wall Coverings

00403 ink

Product Specifications

Style Number	60751
Construction	Needlebond
Pattern	Single Rib
Fibre	50% Olefin / 50% PET Polyester
Dye Method	100% Solution Dyed
Secondary Backing	SBR Latex
Total Weight	30 oz/ly
Roll Size	72.0 ft x 54.0 in

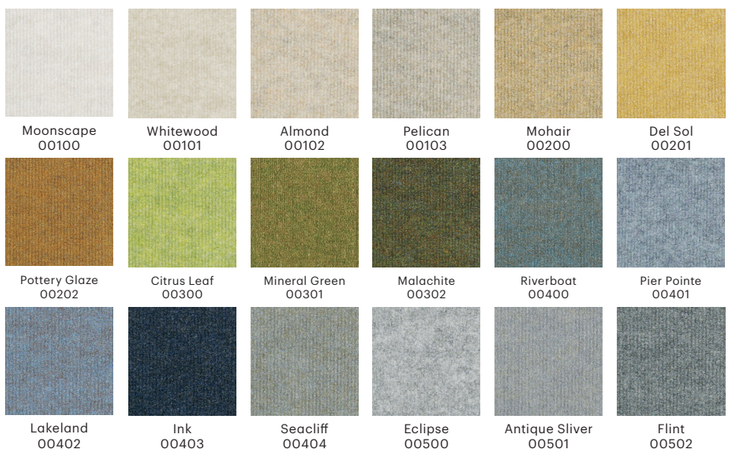

Moonscape 00100 | Whitewood 00101 | Almond 00102 | Pelican 00103 | Mohair 00200 | Del Sol 00201

Pottery Glaze 00202 | Citrus Leaf 00300 | Mineral Green 00301 | Malachite 00302 | Riverboat 00400 | Pier Pointe 00401

Lakeland 00402 | Ink 00403 | Seacliff 00404 | Eclipse 00500 | Antique Sliver 00501 | Flint 00502

Onyx 00503 | Black Nickel 00504 | Snakeskin 00506 | Exotic Clay 00600 | Teak 00700 | Mink 00701

Sierra 00702 | Espresso 00703 | Hazelnut 00704 | Red Velvet 00800 | Roasted Pepper 00801 | Blooms Berry 00900

Office Smart™ Static Control

Designed for high traffic/high use networked environments to minimize nuisance static and to provide additional protection against static damage.

Level 1– General Office Use

- kV rating < 2.0kV | not grounded | conductive, 15% coverage
- Waiting rooms, conference rooms, offices, lobbies, common areas
- Uses Fibersmart™ technology

Daily Planner | Office Smart™ — Tile Size | 24x24

Morning Meeting

Matching Carpet Tile
Tangle Tile*

**Product does not contain Fibersmart™ Technology*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.49 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5035 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended installation	Monolithic, Quarter Turn, Random, Ashlar, Brick	

Morning Meeting

Closing Time


Rise & Shine


Month End

End of Day


Coffee Break

Collaborators | Office Smart™ — Tile Size | 24x24

Brainstorm

Matching Carpet Tile
Tempt Tile*

**Product does not contain Fibersmart™ Technology*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Dye Method	100% Solution Dyed	
Tufted Weight	16 oz.	542.5 g/m²
Gauge	1/12	47.2/10 cm
Average Density	4923 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended installation	Monolithic, Quarter Turn, Random, Ashlar, Brick	


Brainstorm


Open Forum


Task Force


Teamwork


Think Tank

Thought Leader

Workspace | Office Smart™ — Tile Size | 24x24

On the Road

Matching Carpet Tile
Embark Tile*

**Product does not contain Fibersmart™ Technology*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Dye Method	98% Solution Dyed / 2% Yarn Dyed	
Tufted Weight	17 oz.	576.4 g/m²
Gauge	1/12	47.2/10 cm
Average Density	5829 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	EcoWorx®	
Recommended installation	Monolithic, Quarter Turn, Ashlar, Brick	


High Rise

Home Office

Corner Office

On The Road

Coffee Shop

Downtown

StaticSmart® Static Control

Designed for use in technology rich environments where interruptions in computer or electronic equipment performance caused by electrostatic discharge cannot be tolerated.

Level 2 – Technology Rich Environments

- kV rating < 1.0kV | grounded | conductive, 33% coverage
- Broadcast and media, network operations centers, and computer server/data centers
- Contains continuous conductive staticsmart Fibrelink™ monofilament

Lan 4.1 Colonial | StaticSmart®

Tile Size | 24x24

Wigglesworth

Matching Tile
Transparent Tile*

**Product does not contain conductive properties*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Conductive Fibre Technology	StaticSmart Fibrelink™ Monofilament	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	745.9 g/m²
Gauge	1/12	47.2/10 cm
Average Density	7104 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Conductive EcoWorx®	
Recommended installation	Monolithic, Quarter Turn, Ashlar, Brick	

Wigglesworth | Wheatley | Hemingway | Smith | Faulkner | O'neil

Lan 4.0 | StaticSmart®

Tile Size | 24x24

Golden Mocha

Matching Tile
Peto II 26 Tile*

**Product does not contain conductive properties*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Conductive Fibre Technology	StaticSmart Fibrelink™ Monofilament	
Dye Method	Solution Dyed	
Tufted Weight	22 oz.	745.9 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6637 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Conductive EcoWorx®	
Recommended installation	Monolithic	



Honey | Olive | Deep Blue | Golden Mocha | Midnight | Steel Gray

StaticSmart® Plus

Designed with maximum static protection for electronics manufacturing environments and anywhere where 24/7 operational readiness, public safety, and security are at stake.

Level 3 – Mission Critical Environments

- kV rating < .4kV | grounded | conductive, 100% coverage
- Public safety/ e-9-1-1/emergency operations, air traffic control, and electronics manufacturing/R&D
- Contains continuous conductive staticsmart Fibrelink™ monofilament in every tuft

Presidential | StaticSmart® Plus

Tile Size | 24x24

Roosevelt

Matching Tile
Reparte Tile*

**Product does not contain conductive properties*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Conductive Fibre Technology	Continuous Conductive StaticSmart Fibrelink™ Monofilament in Every Tuft	
Dye Method	100% Solution Dyed	
Tufted Weight	22 oz.	746 g/m²
Gauge	1/10	39.4/10 cm
Average Density	6754 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Conductive EcoWorx®	
Recommended installation	Quarter Turn, Ashlar	

Adams

Jackson

Madison



Truman

Roosevelt

Washington

Discovery Eco | StaticSmart® Plus

Tile Size | 24x24

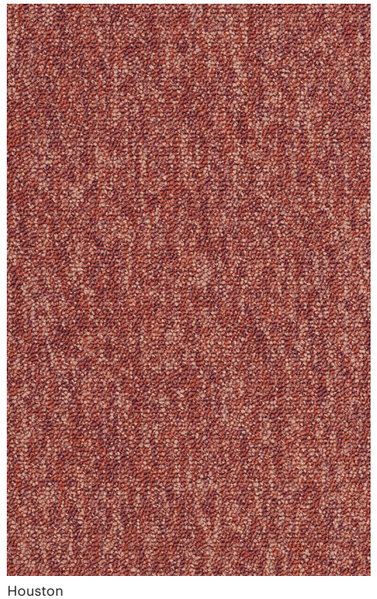

Houston

Coordinating Products
Peto II 26 Tile*

**Product does not contain conductive properties*

Product Specifications

Fibre	EcoSolution Q® Nylon	
Conductive Fibre Technology	Continuous Conductive StaticSmart Fibrelink™ Monofilament in Every Tuft	
Dye Method	100% Solution Dyed	
Tufted Weight	24 oz.	813.7 g/m²
Gauge	1/10	39.4/10 cm
Average Density	7642 ozs./yd³	
Product Size	24 in x 24 in	61 cm x 61 cm
Secondary Backing	Conductive EcoWorx®	
Recommended installation	Monolithic	



Houston

Crockett



Columbus Blue

Carson



Livingstone

Shackelton Grey

Galileo



Magellan

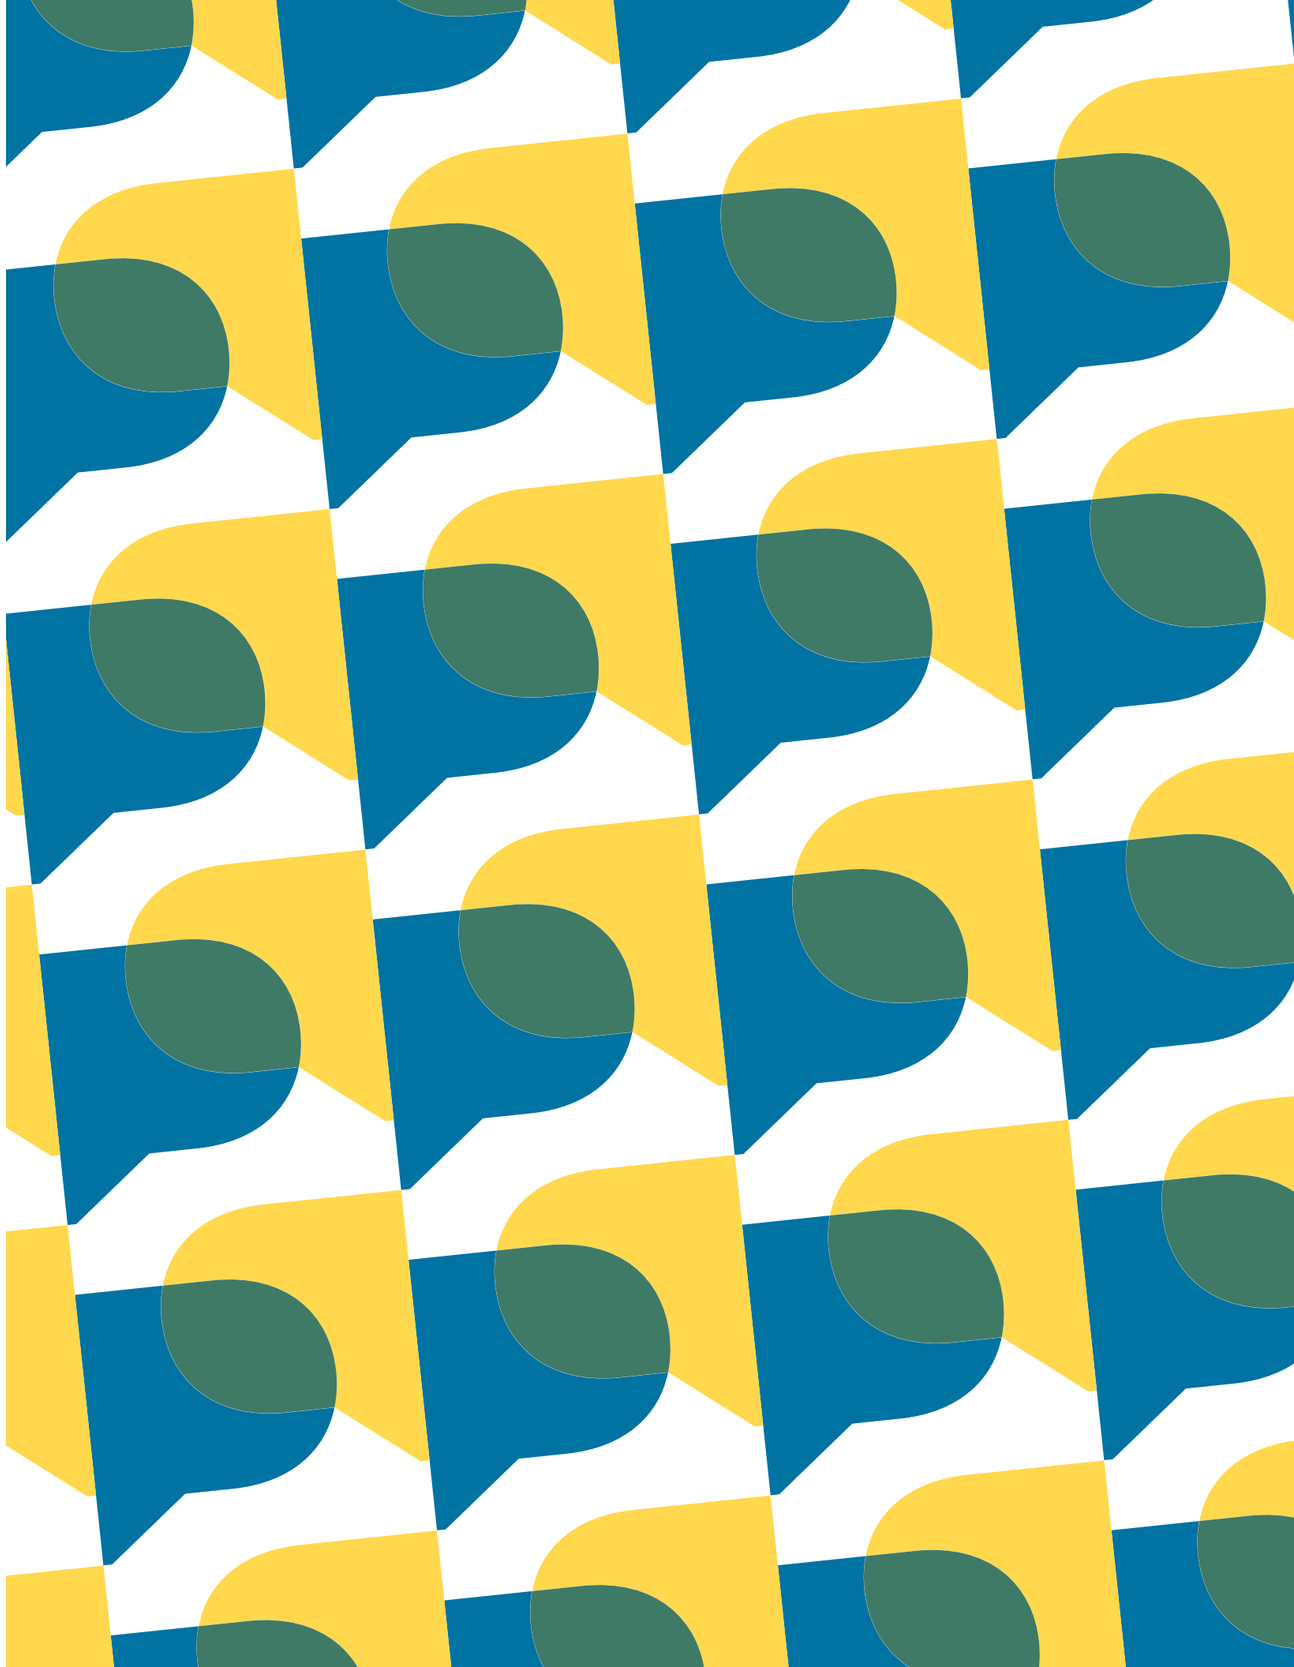

ShawContract®